

PQ20WZ51J00H

PQ20WZ11J00H

Variable Output, Surface Mount Type
Low Power-Loss Voltage Regulators

■ Features

- 1.Low power-loss
(Dropout voltage:MAX.0.5V)
- 2.Surface mount package
- 3.Output current (0.5A:PQ20WZ51J00H)
(1.0A:PQ20WZ11J00H)
- 4.Reference voltage precision: $\pm 2.0\%$
- 5.Variable output voltage(3 to 20V)
- 6.Built-in ON/OFF control function
- 7.Low dissipation current at OFF-state(Iqs:MAX.5μA)
- 8.Built-in overcurrent and overheating protection functions
- 9.RoHS directive compliant


■ Applications

- 1.Personal computers
- 2.CD-ROM drives
- 3.Power supplies for various OA equipment

■ Model Line-up

Output current (Io)	Package type	Variable output
0.5A	Taping	PQ20WZ5UJ00H
	Sleeve	PQ20WZ51J00H
1A	Taping	PQ20WZ1UJ00H
	Sleeve	PQ20WZ11J00H

■ Outline Dimensions

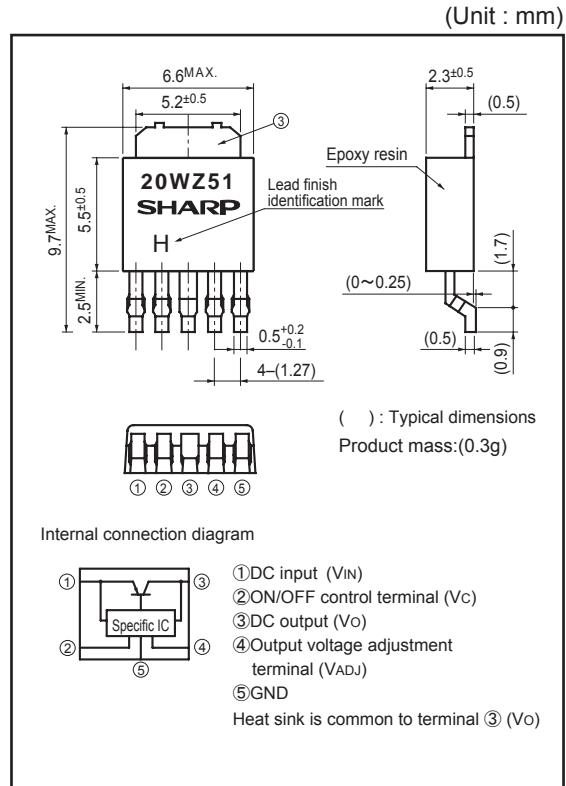

■ Absolute Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Rating	Unit
* ¹ Input voltage	V _{IN}	24	V
ON/OFF control terminal voltage	V _C	24	V
* ¹ Output adjustment terminal voltage	V _{ADJ}	5	V
Output current	PQ20WZ51J00H	0.5	A
	PQ20WZ11J00H	1	
* ² Power dissipation	P _D	8	W
* ³ Junction temperature	T _j	150	°C
Operating temperature	T _{opr}	-20 to +80	°C
Storage temperature	T _{stg}	-40 to +150	°C
Soldering temperature	T _{sol}	260(10s)	°C

*¹ All are open except GND and applicable terminals.

*² P_D: With infinite heat sink

*³ Overheat protection may operate at T_j:125°C to 150°C

Notice The content of data sheet is subject to change without prior notice.

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

■ Electrical Characteristics

(Unless otherwise specified, condition shall be $V_{IN}=5V, V_o=3.3, R_1=2k\Omega, R_2=500\Omega, V_c=2.7V, T_a=25^{\circ}C$)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input voltage	V_{IN}	-	3.5	-	24	V
Output voltage	V_o	-	3.0	-	20	V
Load regulation	Reg_L	*5	-	-	2.0	%
Line regulation	Reg_I	$V_{IN}=4$ to $10V, I_o=5mA$	-	-	2.5	%
Ripple rejection	RR	Refer to Fig.2	45	60	-	dB
Reference voltage	V_{ref}	*4	2.574	2.64	2.706	V
Temperature coefficient of reference voltage	$T_{C,V_{ref}}$	$T_j=0$ to $+125^{\circ}C, I_o=5mA$	-	± 1.0	-	%
Dropout voltage	V_{I-O}	*4, *6	-	-	0.5	V
Quiescent current	I_q	$I_o=0A$	-	-	8	mA
*7 ON-state voltage for control	$V_{C(ON)}$	-	2.0	-	-	V
ON-state current for control	$I_{C(ON)}$	-	-	-	200	μA
OFF-state voltage for control	$V_{C(OFF)}$	$I_o=0A$	-	-	0.8	V
OFF-state current for control	$I_{C(OFF)}$	$I_o=0A, V_c=0.4V$	-	-	2.0	μA
Output OFF-state consumption current	I_{qs}	$I_o=0A, V_c=0.4V$	-	-	5.0	μA

*4 PQ20WZ51J00H: $I_o=0.3A$, PQ20WZ11J00H: $I_o=0.5A$ *5 PQ20WZ51J00H: $I_o=5mA$ to $0.5A$, PQ20WZ11J00H: $I_o=5mA$ to $1.0A$

*6 Input voltage shall be the value when output voltage is 95% in comparison with the initial value.

*7 In case of opening control terminal (2), output voltage turns off.

Fig.1 Test Circuit



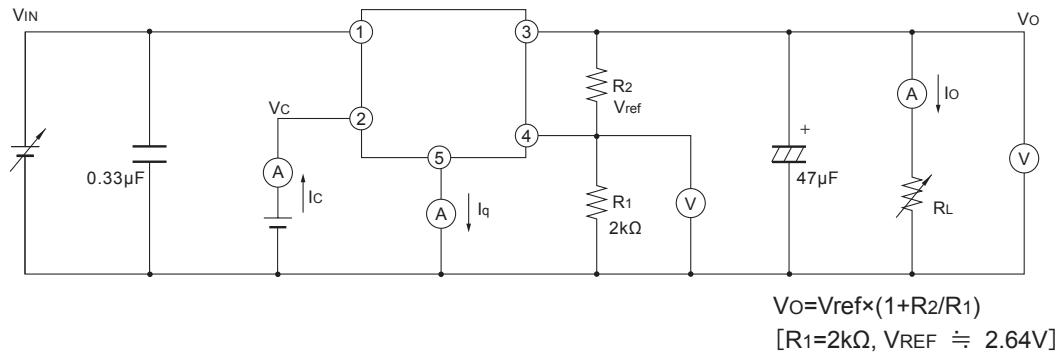


Fig.2 Test Circuit for Ripple Rejection

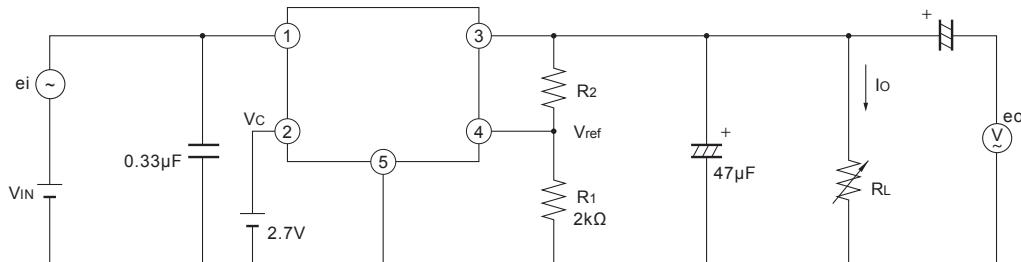

$f=120Hz$ (sine wave)
 $ei(rms)=0.5V$
 $V_{IN}=5V$
 $V_o=3.3V(R_1=2k\Omega)$
 $I_o=0.3A$
 $RR=20\log(ei(rms)/eo(rms))$

Fig.3 Power Dissipation vs. Ambient Temperature

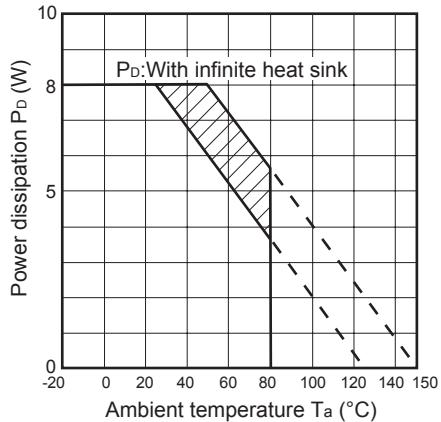

Note) Oblique line portion:Overheat protection may operate in this area.

Fig.5 Overcurrent Protection Characteristics (Typical Value)(PQ20WZ11J00H)

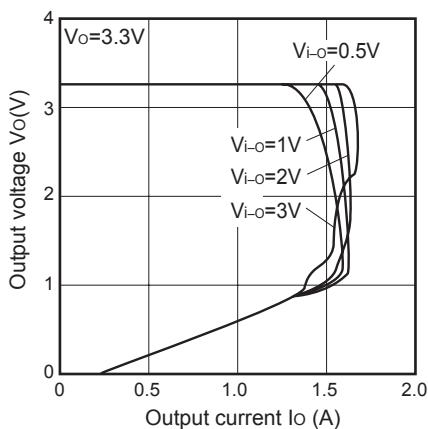


Fig.7 Reference Voltage Deviation vs. Junction Temperature (Typical Value)

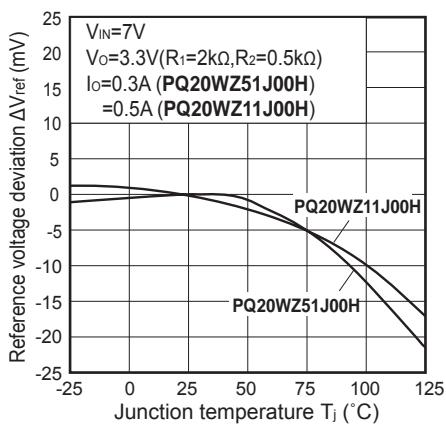


Fig.4 Overcurrent Protection Characteristics (Typical Value)(PQ20WZ51J00H)

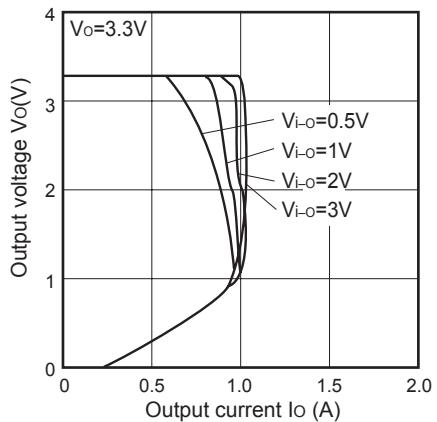


Fig.6 Output Voltage Adjustment Characteristics

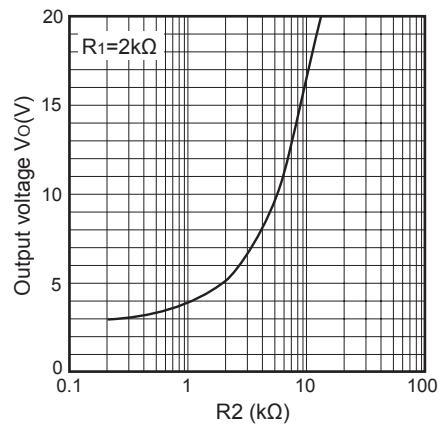


Fig.8 Output Voltage vs. Input Voltage (PQ20WZ51J00H)

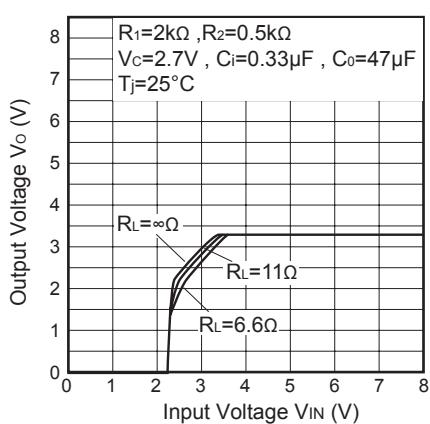


Fig.9 Output Voltage vs. Input Voltage (PQ20WZ11J00H)

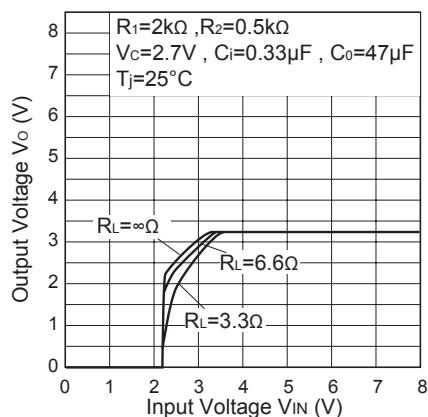


Fig.10 Dropout Voltage vs. Junction Temperature(PQ20WZ51J00H)

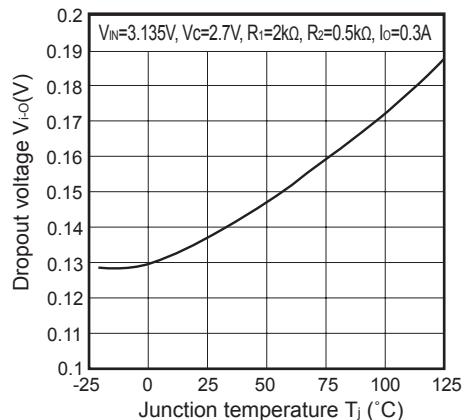


Fig.11 Dropout Voltage vs. Junction Temperature(PQ20WZ11J00H)

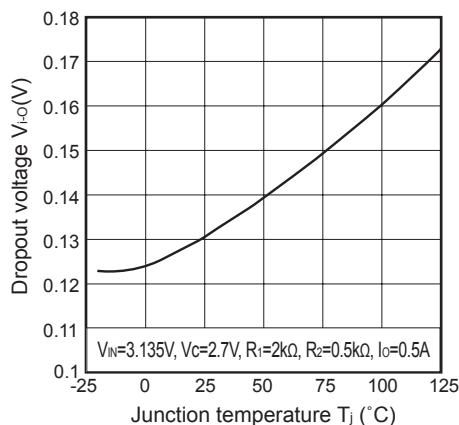


Fig.12 Quiescent Current vs. Junction Temperature

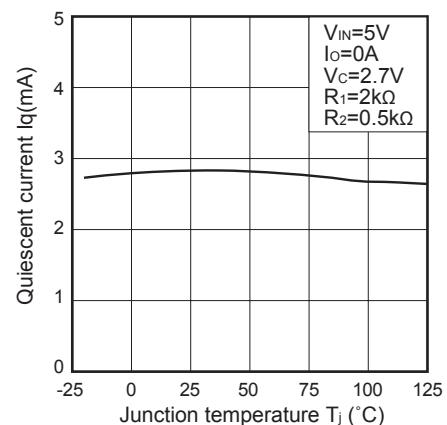


Fig.13 Ripple Rejection vs. Input Ripple Frequency

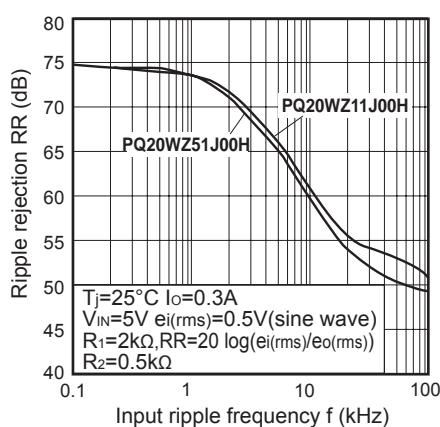


Fig.14 Ripple Rejection vs. Output Current (PQ20WZ51J00H)

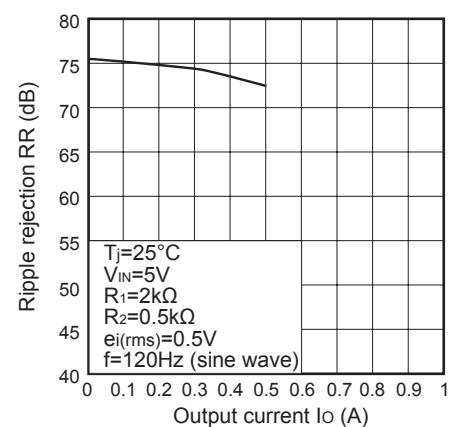


Fig.15 Ripple Rejection vs. Output Current (PQ20WZ11J00H)

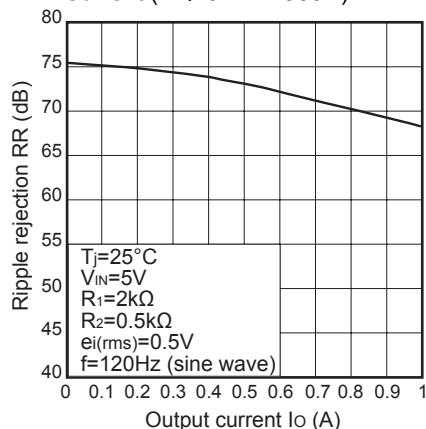


Fig.16 Circuit Operating Current vs. Input Voltage (PQ20WZ51J00H)

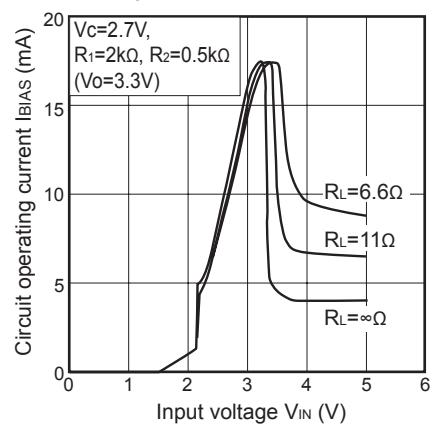


Fig.17 Circuit Operating Current vs. Input Voltage (PQ20WZ11J00H)



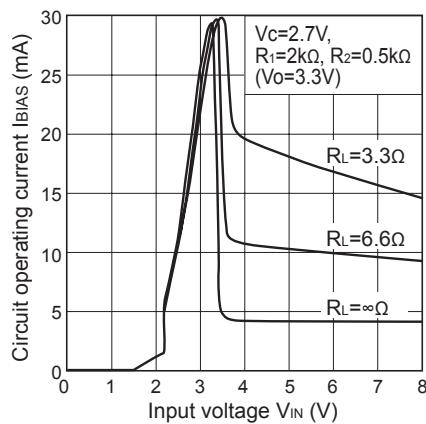


Fig.18 Power Dissipation vs. Ambient Temperature

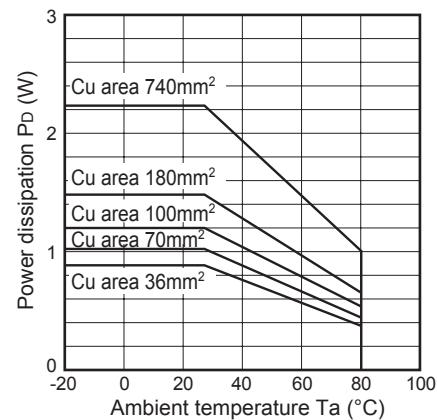


Mounting PCB



Material : Glass-cloth epoxy resin
Size : 50×50×1.6mm
Cu thickness : 35μm

■ Setting of Output Voltage

Output voltage is able to set from 3V to 20V when resistors R₁ and R₂ are attached to ,③、④、⑤ terminals. As for the external resistors to set output voltage, refer to the figure below and Fig.6.

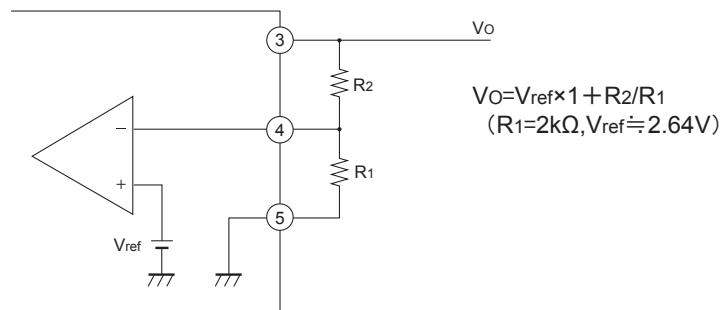

■ Typical Application

