

January 7, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:<http://www.semtech.com>

## AXIAL LEADED HERMETICALLY SEALED HIGH VOLTAGE FAST RECTIFIER DIODE

## QUICK REFERENCE DATA


- Low reverse recovery time
- High thermal shock resistance
- Hermetically sealed with Metoxilite metal oxide
- Low switching losses
- Soft, non-snap off, recovery characteristics

- $V_R = 7.5 - 10kV$
- $I_F = 290mA$
- $t_{rr} = 300nS$
- $I_R = 1\mu A$

## ABSOLUTE MAXIMUM RATINGS (@ 25°C unless otherwise specified)

	Symbol	SM75F	SM100F	Unit
Working reverse voltage	$V_{RWM}$	7500	10000	V
Repetitive reverse voltage	$V_{RRM}$	7500	10000	V
Average forward current (@ 55°C in oil)	$I_F(AV)$	— 0.29 —	— 0.29 —	A
Repetitive surge current (@ 55°C)	$I_{FRM}$	— 1.00 —	— 1.00 —	A
Non-repetitive surge current ( $t_p = 8.3mS$ , @ $V_R$ & $T_{jmax}$ )	$I_{FSM}$	— 14.0 —	— 14.0 —	A
Storage temperature range	$T_{STG}$	— -65 to +175 —	— -65 to +175 —	°C
Operating temperature range	$T_{OP}$	— -65 to +175 —	— -65 to +175 —	°C


## MECHANICAL

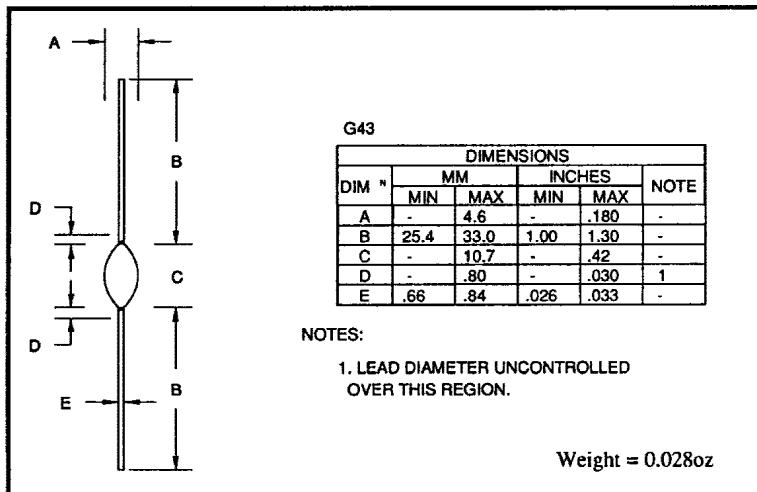

January 7, 1998

## CHARACTERISTICS (@ 25°C unless otherwise specified)

	Symbol	SM75F	SM100F	Unit
Average forward current max. (pcb mounted; TA = 55°C) for sine wave for square wave (d = 0.5)	I <sub>F(AV)</sub> I <sub>F(AV)</sub>	← 0.11 → ← 0.12 →		A
Average forward current max. (unstirred oil at 55°C) for sine wave for square wave	I <sub>F(AV)</sub> I <sub>F(AV)</sub>	← 0.27 → ← 0.29 →		A
I <sup>2</sup> t for fusing (t = 8.3mS) max.	I <sup>2</sup> t	← 0.81 →		A <sup>2</sup> S
Forward voltage drop max. @ I <sub>F</sub> = 100mA, T <sub>j</sub> = 25°C	V <sub>F</sub>	← 12.0 →		V
Reverse current max. @ V <sub>RWM</sub> , T <sub>j</sub> = 25°C @ V <sub>RWM</sub> , T <sub>j</sub> = 100°C	I <sub>R</sub> I <sub>R</sub>	← 1.0 → ← 20 →		μA
Reverse recovery time max. 50mA I <sub>F</sub> to 100mA I <sub>R</sub> . Recover to 25mA I <sub>RR</sub>	t <sub>rr</sub>	← 300 →		nS
Junction capacitance typ. @ V <sub>R</sub> = 5V, f = 1MHz	C <sub>j</sub>	← 3.0 →		pF
Thermal resistance - junction to oil Stirred oil Unstirred oil	R <sub>θJO</sub> R <sub>θJO</sub>	← 20 → ← 28 →		°C/W
Thermal resistance - junction to amb. on 0.06" thick pcb. 1oz copper.	R <sub>θJA</sub>	← 91 →		°C/W

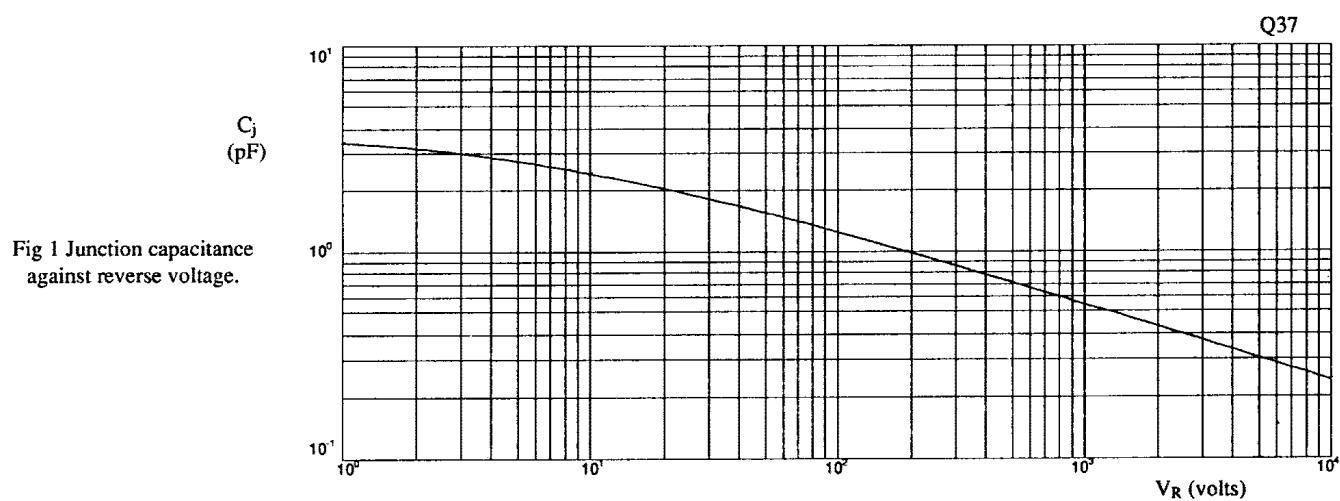

January 7, 1998

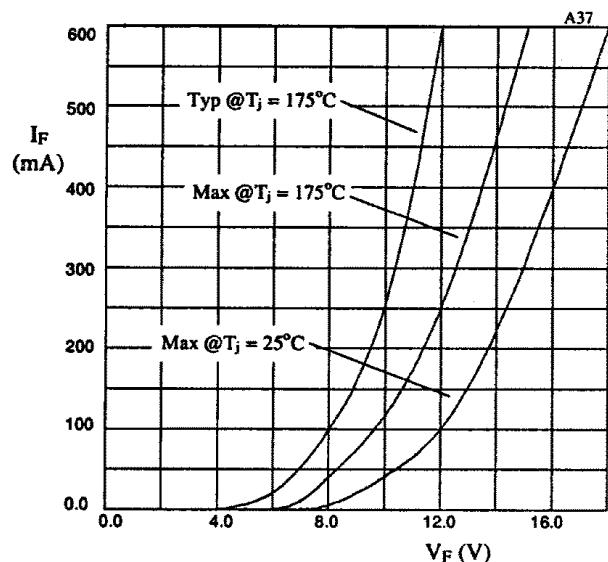


Fig 2. Forward voltage drop as a function of forward current.

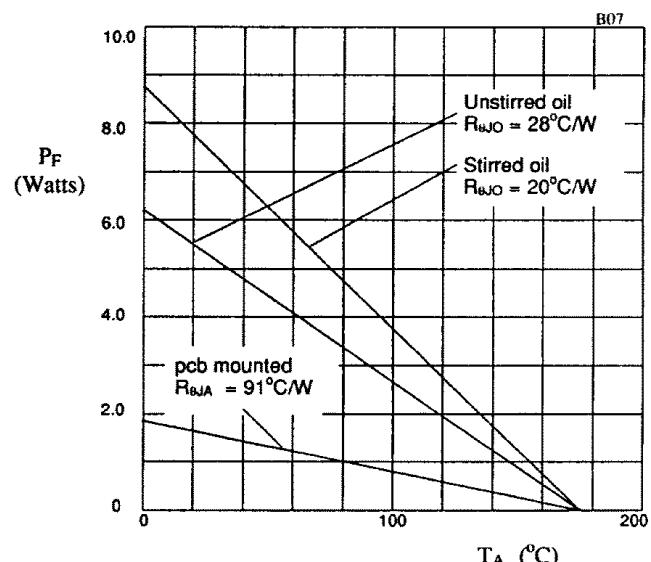


Fig 3. Power derating in air and oil.

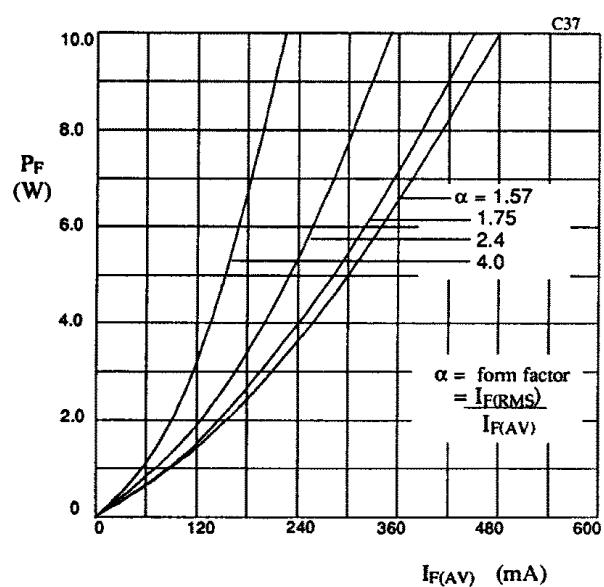


Fig 4. Forward power dissipation as a function of forward current, for sinusoidal operation.

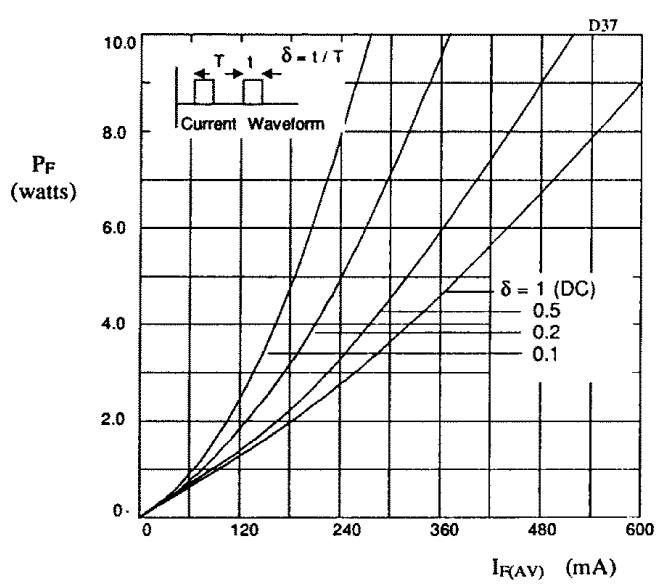


Fig 5. Forward power dissipation as a function of forward current, for square wave operation.