

The MB9B420TA Series are highly integrated 32-bit microcontrollers dedicated for embedded controllers with low-power consumption mode and competitive cost.

These series are based on the ARM® Cortex®-M3 Processor with on-chip Flash memory and SRAM, and have peripheral functions such as various timers, ADCs, DACs and Communication Interfaces (CAN, UART, CSIO, I<sup>2</sup>C, LIN).

The products which are described in this data sheet are placed into TYPE12 product categories in "FM3 Family Peripheral Manual".

## Features

### 32-bit ARM® Cortex®-M3 Core

- Processor version: r2p1
- Up to 60 MHz Frequency Operation
- Integrated Nested Vectored Interrupt Controller (NVIC):
  - 1 NMI (non-maskable interrupt) and 48 peripheral interrupts and 16 priority levels
- 24-bit System timer (Sys Tick): System timer for OS task management

### On-chip Memories

#### [Flash memory]

- Dual operation Flash memory
  - Main area:
    - Up to 1.5Mbytes(1008Kbytes(ROM0) + 512Kbytes(ROM1) of Upper bank and 16Kbytes(ROM0 of Lower bank.)
  - Work area
    - 64 Kbytes(ROM1) of Lower bank
- Read cycle: 0 wait-cycle
- Security function for code protection

#### [SRAM]

This Series on-chip SRAM is composed of two independent SRAM (SRAM0, SRAM1). SRAM0 is connected to I-code bus and D-code bus of Cortex-M3 core. SRAM1 is connected to System bus.

- SRAM0: Up to 96 Kbytes
- SRAM1: Up to 96 Kbytes

### External Bus Interface

- Supports SRAM, NOR NAND Flash memory device
- Up to 8 chip selects
- 8/16-bit Data width
- Up to 25-bit Address bit
- Maximum area size : Up to 256 Mbytes
- Supports Address/Data multiplex
- Supports external RDY function

### CAN Interface

- Compatible with CAN Specification 2.0A/B
- Maximum transfer rate: 1 Mbps
- Built-in 32 message buffer

### Multi-function Serial Interface (Max 16channels)

- 16 channels with 16stepsx9-bit FIFO
- Operation mode is selectable from the followings for each channel.
  - UART
  - CSIO
  - LIN
  - I<sup>2</sup>C

#### [UART]

- Full duplex double buffer
- Selection with or without parity supported
- Built-in dedicated baud rate generator
- External clock available as a serial clock
- Hardware Flow control: Automatically control the transmission/reception by CTS/RTS (only ch.4)
- Various error detection functions available (parity errors, framing errors, and overrun errors)

#### [CSIO]

- Full duplex double buffer
- Built-in dedicated baud rate generator
- Overrun error detection function available

#### [LIN]

- LIN protocol Rev.2.1 supported
- Full duplex double buffer
- Master/Slave mode supported
- LIN break field generation (can be changed to 13 to 16-bit length)
- LIN break delimiter generation (can be changed to 1 to 4-bit length)
- Various error detection functions available (parity errors, framing errors, and overrun errors)

**[I<sup>2</sup>C]**

Standard - mode (Max 100kbps) / Fast - mode (Max 400kbps) supported

**DMA Controller (8channels)**

The DMA Controller has an independent bus from the CPU, so CPU and DMA Controller can process simultaneously.

- 8 independently configured and operated channels
- Transfer can be started by software or request from the built-in peripherals
- Transfer address area: 32-bit (4 Gbytes)
- Transfer mode: Block transfer/Burst transfer/Demand transfer
- Transfer data type: byte/half-word/word
- Transfer block count: 1 to 16
- Number of transfers: 1 to 65536

**A/D Converter (Max 24channels)**
**[12-bit A/D Converter]**

- Successive Approximation type
- Built-in 2units
- Conversion time: 1.0µs @ 2.7V to 5.5V
- Priority conversion available (priority at 2levels)
- Scanning conversion mode
- Built-in FIFO for conversion data storage (for SCAN conversion: 16steps, for Priority conversion: 4steps)

**D/A Converter (Max 2channels)**

- R-2R type
- 10-bit resolution

**Base Timer (Max 16channels)**

Operation mode is selectable from the followings for each channel.

- 16-bit PWM timer
- 16-bit PPG timer
- 16/32-bit reload timer
- 16/32-bit PWC timer

**General-Purpose I/O Port**

This series can use its pins as general-purpose I/O ports when they are not used for external bus or peripherals. Moreover, the port relocate function is built in. It can set which I/O port the peripheral function can be allocated to.

- Capable of pull-up control per pin
- Capable of reading pin level directly
- Built-in the port relocate function
- Up to 154 high-speed general-purpose I/O Ports@176pin Package
- Some ports are 5V tolerant.  
See "4. List of Pin Functions" and "5. I/O Circuit Type" to confirm the corresponding pins.

**Dual Timer (32/16-bit Down Counter)**

The Dual Timer consists of two programmable 32/16-bit down counters.

Operation mode is selectable from the followings for each channel.

- Free-running
- Periodic (=Reload)
- One-shot

**Quadrature Position/Revolution Counter (QPRC)  
(Max 2channels)**

The Quadrature Position/Revolution Counter (QPRC) is used to measure the position of the position encoder. Moreover, it is possible to use as the up/down counter.

- The detection edge of the three external event input pins AIN, BIN and ZIN is configurable.
- 16-bit position counter
- 16-bit revolution counter
- Two 16-bit compare registers

**HDMI-CEC/Remote Control Reception (Up to 2channels)**

- HDMI-CEC transmission
  - Header block automatic transmission by judging Signal free
  - Generating status interrupt by detecting Arbitration lost
  - Generating START, EOM, ACK automatically to output CEC transmission by setting 1 byte data
  - Generating transmission status interrupt when transmitting 1 block (1 byte data and EOM/ACK)
- HDMI-CEC reception
  - Automatic ACK reply function available
  - Line error detection function available
- Remote control reception
  - 4 bytes reception buffer
  - Repeat code detection function available

### Multi-function Timer

The Multi-function timer is composed of the following blocks.

- 16-bit free-run timer × 3ch./unit
- Input capture × 4ch./unit
- Output compare × 6ch./unit
- A/D activation compare × 2ch./unit
- Waveform generator × 3ch./unit
- 16-bit PPG timer × 3ch./unit

The following function can be used to achieve the motor control.

- PWM signal output function
- DC chopper waveform output function
- Dead time function
- Input capture function
- A/D convertor activate function
- DTIF (Motor emergency stop) interrupt function

### Real-time clock (RTC)

The Real-time clock can count Year/Month/Day/Hour/Minute/Second/A day of the week from 01 to 99.

- The interrupt function with specifying date and time (Year/Month/Day/Hour/Minute/Second/A day of the week.) is available. This function is also available by specifying only Year, Month, Day, Hour or Minute.
- Timer interrupt function after set time or each set time.
- Capable of rewriting the time with continuing the time count.
- Leap year automatic count is available.

### Watch Counter

The Watch counter is used for wake up from sleep and timer mode.

Interval timer: up to 64s (Max) @ Sub Clock : 32.768 kHz

### External Interrupt Controller Unit

- Up to 32 external interrupt input pins @ 176pin Package
- Include one non-maskable interrupt (NMI) input pin

### Watchdog Timer (2channels)

A watchdog timer can generate interrupts or a reset when a time-out value is reached.

This series consists of two different watchdogs, a "Hardware" watchdog and a "Software" watchdog.

The "Hardware" watchdog timer is clocked by the built-in low-speed CR oscillator. Therefore, the "Hardware" watchdog is active in any low-power consumption modes except RTC, STOP, Deep standby RTC, Deep standby STOP modes.

### CRC (Cyclic Redundancy Check) Accelerator

The CRC accelerator calculates the CRC which has a heavy software processing load, and achieves a reduction of the integrity check processing load for reception data and storage.

CCITT CRC16 and IEEE-802.3 CRC32 are supported.

- CCITT CRC16 Generator Polynomial: 0x1021
- IEEE-802.3 CRC32 Generator Polynomial: 0x04C11DB7

### Clock and Reset

#### [Clocks]

Selectable from five clock sources (2 external oscillators, 2 built-in CR oscillators, and Main PLL).

- Main Clock : 4 MHz to 48 MHz
- Sub Clock : 32.768 kHz
- Built-in high-speed CR Clock : 4 MHz
- Built-in low-speed CR Clock : 100 kHz
- Main PLL Clock

#### [Resets]

- Reset requests from INITX pin
- Power-on reset
- Software reset
- Watchdog timers reset
- Low-voltage detection reset
- Clock Super Visor reset

### Clock Super Visor (CSV)

Clocks generated by built-in CR oscillators are used to supervise abnormality of the external clocks.

- If external clock failure (clock stop) is detected, reset is asserted.
- If external frequency anomaly is detected, interrupt or reset is asserted.

### Low-Voltage Detector (LVD)

This Series includes 2-stage monitoring of voltage on the VCC pins. When the voltage falls below the voltage that has been set, Low-Voltage Detector generates an interrupt or reset.

- LVD1: error reporting via interrupt
- LVD2: auto-reset operation

## Low-Power Consumption Mode

Six low-power consumption modes supported.

- SLEEP
- TIMER
- RTC
- STOP
- Deep standby RTC (selectable between keeping the value of RAM and not)
- Deep standby STOP (selectable between keeping the value of RAM and not)

## Debug

- Serial Wire JTAG Debug Port (SWJ-DP)
- Embedded Trace Macrocell (ETM)

## Unique ID

Unique value of the device (41-bit) is set.

## Power Supply

Wide range voltage: VCC = 2.7V to 5.5V

## Contents

<b>1. Product Lineup .....</b>	<b>7</b>
<b>2. Packages .....</b>	<b>8</b>
<b>3. Pin Assignment .....</b>	<b>9</b>
<b>4. List of Pin Functions.....</b>	<b>12</b>
<b>5. I/O Circuit Type .....</b>	<b>53</b>
<b>6. Handling Precautions .....</b>	<b>59</b>
6.1   Precautions for Product Design.....	59
6.2   Precautions for Package Mounting.....	60
6.3   Precautions for Use Environment.....	61
<b>7. Handling Devices .....</b>	<b>62</b>
<b>8. Block Diagram.....</b>	<b>64</b>
<b>9. Memory Size .....</b>	<b>64</b>
<b>10. Memory Map .....</b>	<b>65</b>
<b>11. Pin Status in Each CPU State .....</b>	<b>68</b>
<b>12. Electrical Characteristics .....</b>	<b>76</b>
12.1   Absolute Maximum Ratings .....	76
12.2   Recommended Operating Conditions .....	78
12.3   DC Characteristics .....	79
12.3.1 Current Rating.....	79
12.3.2 Pin Characteristics .....	82
12.4   AC Characteristics.....	83
12.4.1 Main Clock Input Characteristics.....	83
12.4.2 Sub Clock Input Characteristics .....	84
12.4.3 Built-in CR Oscillation Characteristics .....	85
12.4.4 Operating Conditions of Main PLL (In the case of using main clock for input of PLL) .....	86
12.4.5 Operating Conditions of Main PLL (In the case of using built-in high-speed CR for input clock of main PLL).....	86
12.4.6 Reset Input Characteristics .....	87
12.4.7 Power-on Reset Timing.....	87
12.4.8 External Bus Timing .....	88
12.4.9 Base Timer Input Timing .....	98
12.4.10 CSIO/UART Timing .....	99
12.4.11 External Input Timing.....	107
12.4.12 Quadrature Position/Revolution Counter timing.....	108
12.4.13 I <sup>2</sup> C Timing.....	110
12.4.14 ETM Timing .....	111
12.4.15 JTAG Timing.....	112
12.5   12-bit A/D Converter.....	113
12.6   10-bit D/A Converter.....	116
12.7   Low-Voltage Detection Characteristics.....	117
12.7.1 Low-Voltage Detection Reset.....	117
12.7.2 Interrupt of Low-Voltage Detection .....	118
12.8   Flash Memory Write/Erase Characteristics .....	119
12.8.1 Write / Erase time.....	119
12.8.2 Write cycles and data hold time .....	119

12.9    Return Time from Low-Power Consumption Mode.....	120
12.9.1 Return Factor: Interrupt/WKUP .....	120
12.9.2 Return Factor: Reset.....	122
<b>13. Ordering Information .....</b>	<b>124</b>
<b>14. Package Dimensions .....</b>	<b>125</b>
<b>15. Major Changes .....</b>	<b>128</b>
<b>Document History.....</b>	<b>130</b>

## 1. Product Lineup

### Memory Size

Product name		MB9BF428SA/TA	MB9BF429SA/TA
On-chip Flash memory	Main area	1 Mbytes	1.5 Mbytes
	Work area	64 Kbytes	64 Kbytes
On-chip SRAM	SRAM0	80 Kbytes	96 Kbytes
	SRAM1	80 Kbytes	96 Kbytes
	Total	160 Kbytes	192 Kbytes

### Function

Product name		MB9BF428SA MB9BF429SA	MB9BF428TA MB9BF429TA
Pin count		144	176/192
CPU	Freq.	Cortex-M3 60 MHz	
Power supply voltage range		2.7V to 5.5V	
CAN		1ch.	
DMAC		8ch.	
External Bus Interface		Addr: 25 bit (Max) R/Wdata : 8/16 bit (Max) CS: 8 (Max) SRAM , NOR Flash memory , NAND Flash memory	
Multi-function Serial Interface (UART/CSIO/LIN/I <sup>2</sup> C)		16ch. (Max) with 16stepsx9-bit FIFO	
Base Timer (PWC/Reload timer/PWM/PPG)		16ch. (Max)	
MF-Timer	A/D activation compare	2ch.	1 unit
	Input capture	4ch.	
	Free-run timer	3ch.	
	Output compare	6ch.	
	Waveform generator	3ch.	
	PPG	3ch.	
QPRC		1ch.(Max)	2ch. (Max)
Dual Timer			1 unit
HDMI-CEC/ Remote Control Reception			2ch. (Max)
Real-Time Clock			1 unit
Watch Counter			1 unit
CRC Accelerator			Yes
Watchdog timer		1ch. (SW) + 1ch. (HW)	
External Interrupts		32 pins (Max) + NMI × 1	
I/O ports		122 pins (Max)	154 pins (Max)
12-bit A/D converter		24ch. (2 units)	
10-bit D/A converter		2ch. (Max)	
CSV (Clock Super Visor)		Yes	
LVD (Low-Voltage Detector)		2ch.	
Built-in CR	High-speed	4 MHz (± 2%)	
	Low-speed	100 kHz (Typ)	
Debug Function		SWJ-DP / ETM	
Unique ID		Yes	

**Note:** All signals of the peripheral function in each product cannot be allocated by limiting the pins of package.

It is necessary to use the port relocate function of the I/O port according to your function use.

See "12. Electrical Characteristics 12.4. AC Characteristics 12.4.3. Built-in CR Oscillation Characteristics" for accuracy of built-in CR.

## 2. Packages

Package	Product name	MB9BF428SA MB9BF429SA	MB9BF428TA MB9BF429TA
LQFP:	FPT-144P-M08 (0.5mm pitch)	<input checked="" type="radio"/>	-
LQFP:	FPT-176P-M07 (0.5mm pitch)	-	<input checked="" type="radio"/>
BGA:	BGA-192P-M06 (0.8mm pitch)	-	<input checked="" type="radio"/>


: Supported

**Note:** See "14. Package Dimensions" for detailed information on each package.



### 3. Pin Assignment

FPT-176P-M07

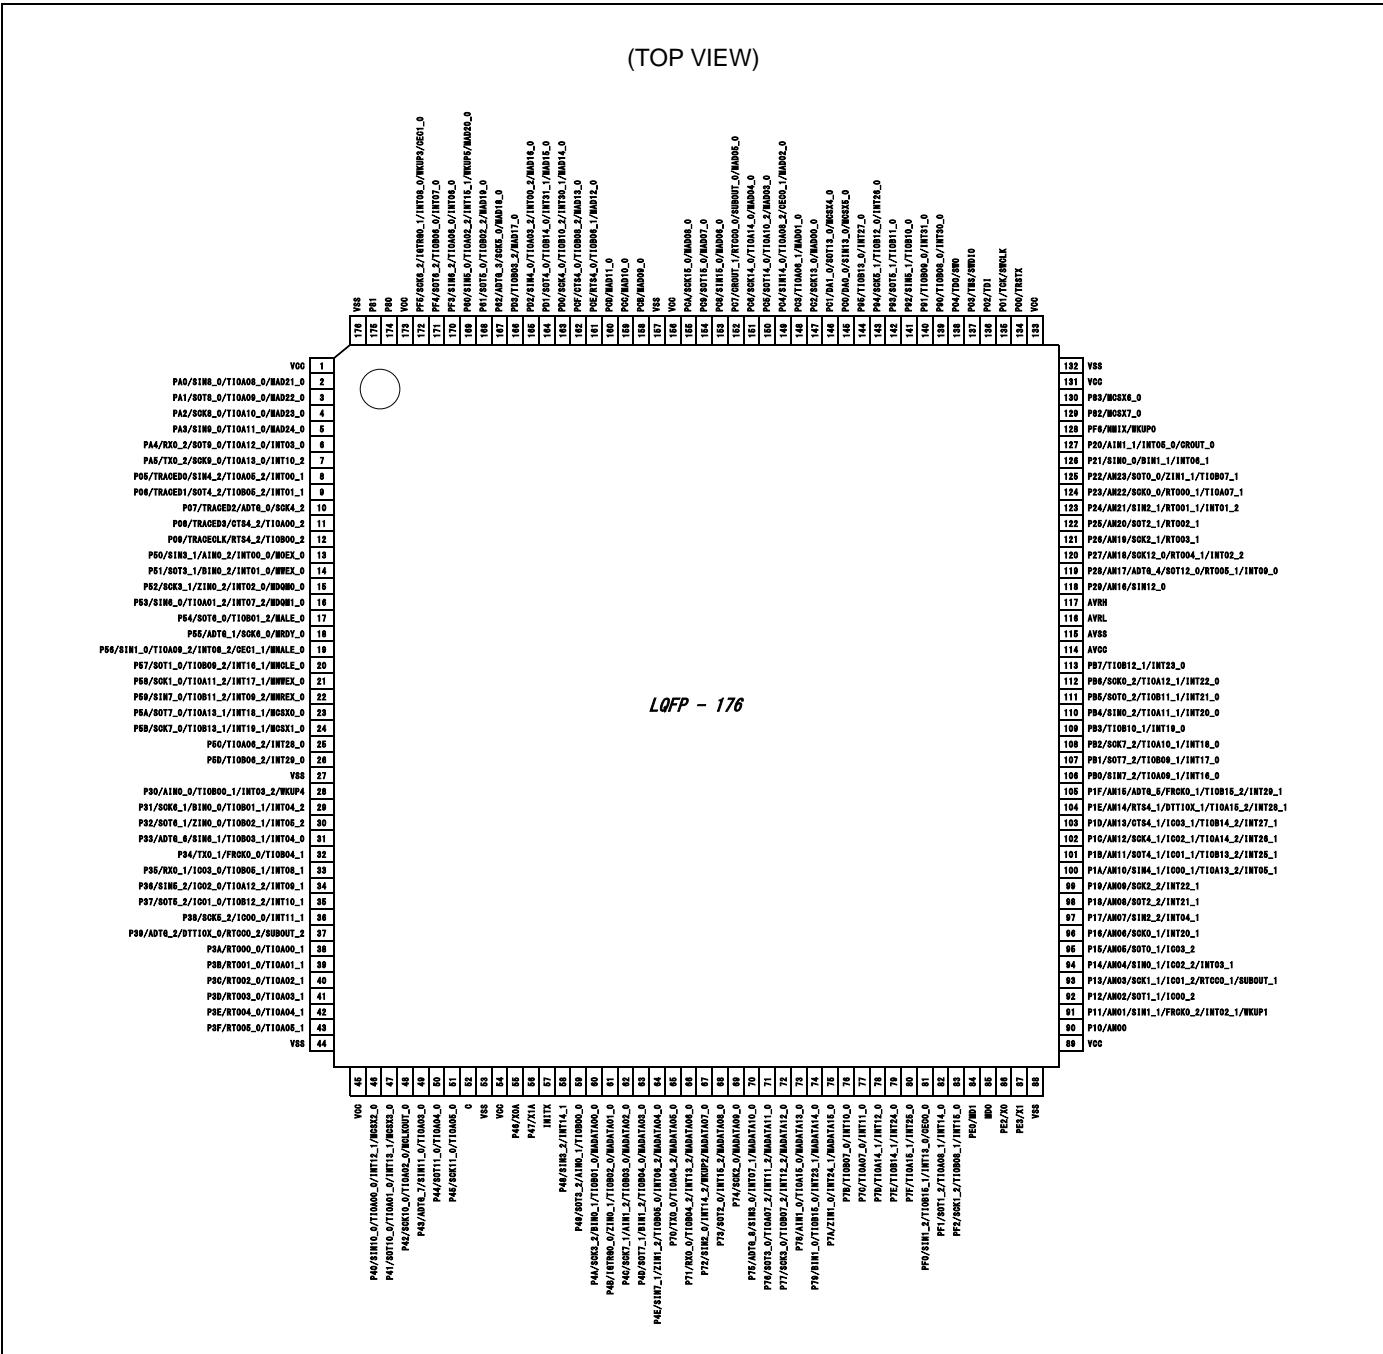


**Note:-**

The number after the underscore ("\_") in pin names such as XXX\_1 and XXX\_2 indicates the relocated port number. For these pins, there are multiple pins that provide the same function for the same channel. Use the extended port function register (EPFR) to select the pin.

**FPT-144P-M08**


(TOP VIEW)

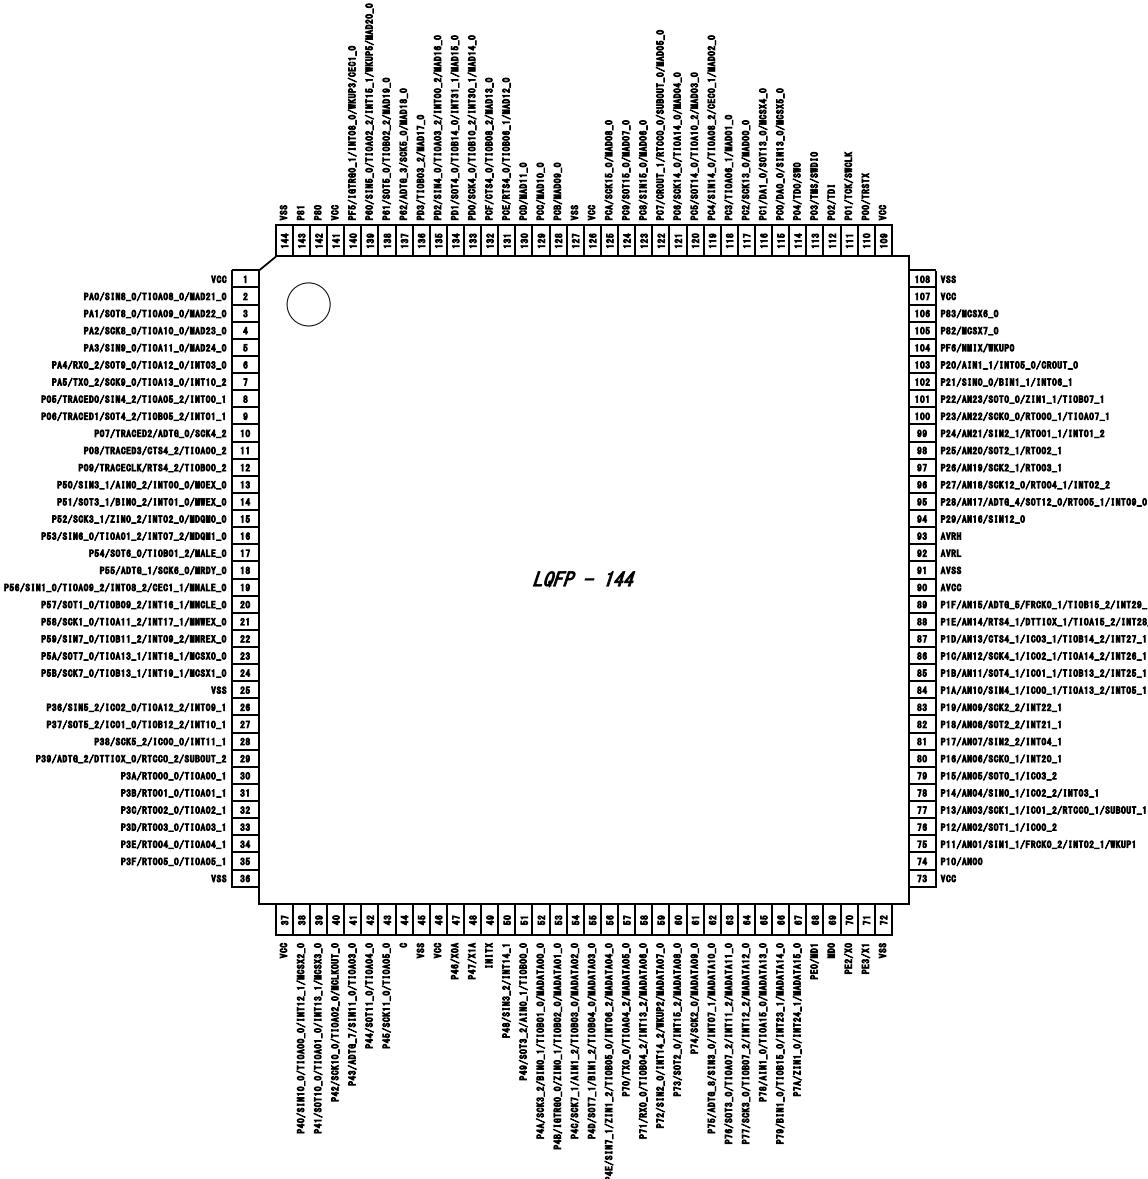

**BGA-192P-M06**

(TOP VIEW)

1 2 3 4 5 6 7 8 9 10 11 12 13 14

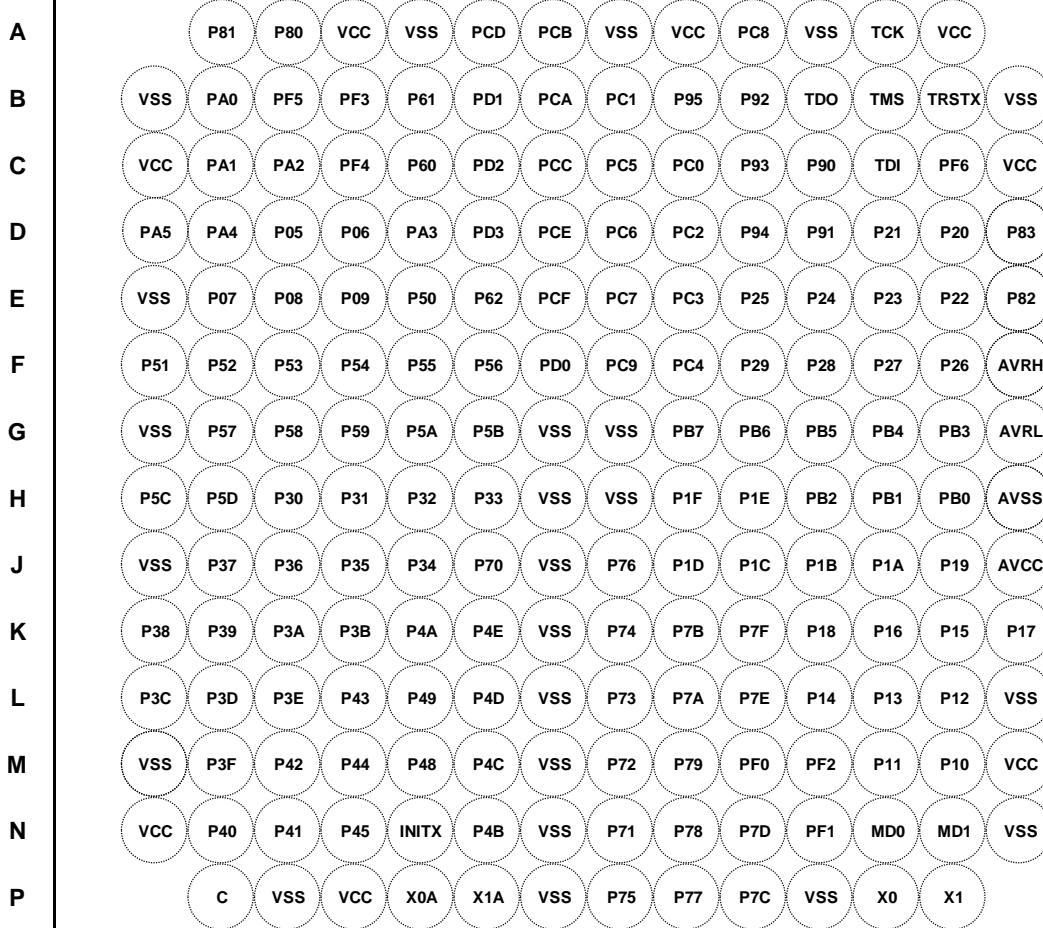
**Note:**

The number after the underscore ("\_") in pin names such as XXX\_1 and XXX\_2 indicates the relocated port number. For these pins, there are multiple pins that provide the same function for the same channel. Use the extended port function register (EPFR) to select the pin.

## 4. List of Pin Functions

### List of pin numbers

The number after the underscore ("\_") in pin names such as XXX\_1 and XXX\_2 indicates the relocated port number. For these pins, there are multiple pins that provide the same function for the same channel. Use the extended port function register (EPFR) to select the pin.

Pin No			Pin Name	I/O circuit type	Pin state type
LQFP-176	LQFP-144	BGA-192			
1	1	C1	VCC	I*	-
2	2	B2	PA0		J
			SIN8_0		
			TIOA08_0		
			MAD21_0		
			PA1	I*	J
3	3	C2	SOT8_0		
			TIOA09_0		
			MAD22_0		
			PA2	I*	J
4	4	C3	SCK8_0		
			TIOA10_0		
			MAD23_0		
			PA3	I*	J
5	5	D5	SIN9_0		
			TIOA11_0		
			MAD24_0		
			PA4	I*	K
6	6	D2	RX0_2		
			SOT9_0		
			TIOA12_0		
			INT03_0		
			PA5	I*	K
7	7	D1	TX0_2		
			SCK9_0		
			TIOA13_0		
			INT10_2		
			P05	E	
8	8	D3	TRACED0		
			SIN4_2		
			TIOA05_2		
			INT00_1		
			P06	E	
9	9	D4	TRACED1		
			SOT4_2		
			TIOB05_2		
			INT01_1		

Pin No			Pin Name	I/O circuit type	Pin state type
LQFP-176	LQFP-144	BGA-192			
10	10	E2	P07	E	P
			TRACED2		
			ADTG_0		
			SCK4_2		
11	11	E3	P08	E	P
			TRACED3		
			CTS4_2		
			TIOA00_2		
12	12	E4	P09	E	P
			TRACECLK		
			RTS4_2		
			TIOB00_2		
13	13	E5	P50	E	K
			SIN3_1		
			AIN0_2		
			INT00_0		
			MOEX_0		
14	14	F1	P51	E	K
			SOT3_1		
			BIN0_2		
			INT01_0		
			MWEX_0		
15	15	F2	P52	E	K
			SCK3_1		
			ZIN0_2		
			INT02_0		
			MDQM0_0		

Pin No			Pin Name	I/O circuit type	Pin state type
LQFP-176	LQFP-144	BGA-192			
16	16	F3	P53	E	K
			SIN6_0		
			TIOA01_2		
			INT07_2		
			MDQM1_0		
17	17	F4	P54	E	J
			SOT6_0		
			TIOB01_2		
			MALE_0		
18	18	F5	P55	E	J
			ADTG_1		
			SCK6_0		
			MRDY_0		
19	19	F6	P56	I*	S
			SIN1_0		
			TIOA09_2		
			INT08_2		
			CEC1_1		
20	20	G2	MNALE_0	I*	K
			P57		
			SOT1_0		
			TIOB09_2		
			INT16_1		
21	21	G3	MNCLE_0	I*	K
			P58		
			SCK1_0		
			TIOA11_2		
			INT17_1		
22	22	G4	MNWEX_0	E	K
			P59		
			SIN7_0		
			TIOB11_2		
			INT09_2		
			MNREX_0		

Pin No			Pin name	I/O circuit type	Pin state type
LQFP-176	LQFP-144	BGA-192			
23	23	G5	P5A	E	K
			SOT7_0		
			TIOA13_1		
			INT18_1		
			MCSX0_0		
24	24	G6	P5B	E	K
			SCK7_0		
			TIOB13_1		
			INT19_1		
			MCSX1_0		
25	-	H1	P5C	E	K
			TIOA06_2		
			INT28_0		
26	-	H2	P5D	E	K
			TIOB06_2		
			INT29_0		
27	25	A5	VSS		-
28	-	H3	P30	E	U
			AIN0_0		
			TIOB00_1		
			INT03_2		
			WKUP4		
29	-	H4	P31	E	K
			SCK6_1		
			BIN0_0		
			TIOB01_1		
			INT04_2		
30	-	H5	P32	E	K
			SOT6_1		
			ZIN0_0		
			TIOB02_1		
			INT05_2		
31	-	H6	P33	E	K
			ADTG_6		
			SIN6_1		
			TIOB03_1		
			INT04_0		

Pin No			Pin name	I/O circuit type	Pin state type
LQFP-176	LQFP-144	BGA-192			
32	-	J5	P34	E	J
			TX0_1		
			FRCK0_0		
			TIOB04_1		
33	-	J4	P35	E	K
			RX0_1		
			IC03_0		
			TIOB05_1		
			INT08_1		
34	26	J3	P36	E	K
			SIN5_2		
			IC02_0		
			TIOA12_2		
			INT09_1		
35	27	J2	P37	E	K
			SOT5_2		
			IC01_0		
			TIOB12_2		
			INT10_1		
36	28	K1	P38	E	K
			SCK5_2		
			IC00_0		
			INT11_1		
37	29	K2	P39	E	J
			ADTG_2		
			DTTI0X_0		
			RTCCO_2		
			SUBOUT_2		
38	30	K3	P3A	F	J
			RTO00_0		
			TIOA00_1		
39	31	K4	P3B	F	J
			RTO01_0		
			TIOA01_1		
40	32	L1	P3C	F	J
			RTO02_0		
			TIOA02_1		

Pin No			Pin name	I/O circuit type	Pin state type
LQFP-176	LQFP-144	BGA-192			
41	33	L2	P3D	F	J
			RTO03_0		
			TIOA03_1		
42	34	L3	P3E	F	J
			RTO04_0		
			TIOA04_1		
43	35	M2	P3F	F	J
			RTO05_0		
			TIOA05_1		
44	36	A8	VSS	-	-
45	37	N1	VCC	-	-
46	38	N2	P40	E	K
			SIN10_0		
			TIOA00_0		
			INT12_1		
			MCSX2_0		
47	39	N3	P41	E	K
			SOT10_0		
			TIOA01_0		
			INT13_1		
			MCSX3_0		
48	40	M3	P42	E	J
			SCK10_0		
			TIOA02_0		
			MCLKOUT_0		
49	41	L4	P43	I*	J
			ADTG_7		
			SIN11_0		
			TIOA03_0		
50	42	M4	P44	I*	J
			SOT11_0		
			TIOA04_0		
51	43	N4	P45	I*	J
			SCK11_0		
			TIOA05_0		
52	44	P2	C	-	-
53	45	A11	VSS	-	-
54	46	P4	VCC	-	-
55	47	P5	P46	D	F
			X0A		
56	48	P6	P47	D	G
			X1A		
57	49	N5	INITX	B	C
58	50	M5	P48	E	K
			SIN3_2		
			INT14_1		

Pin No			Pin name	I/O circuit type	Pin state type
LQFP-176	LQFP-144	BGA-192			
59	51	L5	P49	E	J
			SOT3_2		
			AIN0_1		
			TIOB00_0		
60	52	K5	P4A	E	J
			SCK3_2		
			BIN0_1		
			TIOB01_0		
			MADATA00_0		
61	53	N6	P4B	E	J
			IGTRG0_0		
			ZIN0_1		
			TIOB02_0		
			MADATA01_0		
62	54	M6	P4C	E	J
			SCK7_1		
			AIN1_2		
			TIOB03_0		
			MADATA02_0		
63	55	L6	P4D	E	J
			SOT7_1		
			BIN1_2		
			TIOB04_0		
			MADATA03_0		
64	56	K6	P4E	E	K
			SIN7_1		
			ZIN1_2		
			TIOB05_0		
			INT06_2		
			MADATA04_0		
65	57	J6	P70	E	J
			TX0_0		
			TIOA04_2		
			MADATA05_0		
66	58	N8	P71	E	K
			RX0_0		
			TIOB04_2		
			INT13_2		
			MADATA06_0		

Pin No			Pin name	I/O circuit type	Pin state type	
LQFP-176	LQFP-144	BGA-192				
67	59	M8	P72	E	U	
			SIN2_0			
			INT14_2			
			WKUP2			
			MADATA07_0			
68	60	L8	P73	E	K	
			SOT2_0			
			INT15_2			
			MADATA08_0			
69	61	K8	P74	E	J	
			SCK2_0			
			MADATA09_0			
70	62	P8	P75	E	K	
			ADTG_8			
			SIN3_0			
			INT07_1			
			MADATA10_0			
71	63	J8	P76	E	K	
			SOT3_0			
			TIOA07_2			
			INT11_2			
			MADATA11_0			
72	64	P9	P77	E	K	
			SCK3_0			
			TIOB07_2			
			INT12_2			
			MADATA12_0			
73	65	N9	P78	E	J	
			AIN1_0			
			TIOA15_0			
			MADATA13_0			
74	66	M9	P79	E	K	
			BIN1_0			
			TIOB15_0			
			INT23_1			
			MADATA14_0			
-	-	M1	VSS	-		
-	-	P3	VSS	-		

Pin No			Pin name	I/O circuit type	Pin state type
LQFP-176	LQFP-144	BGA-192			
75	67	L9	P7A	E	K
			ZIN1_0		
			INT24_1		
			MADATA15_0		
76	-	K9	P7B	E	K
			TIOB07_0		
			INT10_0		
77	-	P10	P7C	E	K
			TIOA07_0		
			INT11_0		
78	-	N10	P7D	E	K
			TIOA14_1		
			INT12_0		
79	-	L10	P7E	E	K
			TIOB14_1		
			INT24_0		
80	-	K10	P7F	E	K
			TIOA15_1		
			INT25_0		
81	-	M10	PF0	I*	S
			SIN1_2		
			TIOB15_1		
			INT13_0		
			CEC0_0		
82	-	N11	PF1	I*	K
			SOT1_2		
			TIOA08_1		
			INT14_0		
83	-	M11	PF2	I*	K
			SCK1_2		
			TIOB08_1		
			INT15_0		
84	68	N13	PE0	C	E
			MD1		
85	69	N12	MD0	J	D
86	70	P12	PE2	A	A
			X0		
87	71	P13	PE3	A	B
			X1		
88	72	E1	VSS		-
89	73	M14	VCC		-
-	-	P7	VSS		-
-	-	N7	VSS		-

Pin No			Pin name	I/O circuit type	Pin state type	
LQFP-176	LQFP-144	BGA-192				
90	74	M13	P10 AN00	G	L	
			P11 AN01 SIN1_1 FRCK0_2 INT02_1 WKUP1			
91	75	M12	P12 AN02 SOT1_1 IC00_2	G	N	
92	76		P13 AN03 SCK1_1 IC01_2 RTCCO_1 SUBOUT_1			
93	77		P14 AN04 SIN0_1 IC02_2 INT03_1			
94	78		P15 AN05 SOT0_1 IC03_2			
95	79		P16 AN06 SCK0_1 INT20_1			
96	80		P17 AN07 SIN2_2 INT04_1			
-	-	M7	VSS	-		
-	-	L7	VSS	-		
-	-	K7	VSS	-		

Pin No			Pin name	I/O circuit type	Pin state type
LQFP-176	LQFP-144	BGA-192			
98	82	K11	P18	G	M
			AN08		
			SOT2_2		
			INT21_1		
99	83	J13	P19	G	M
			AN09		
			SCK2_2		
			INT22_1		
100	84	J12	P1A	G	M
			AN10		
			SIN4_1		
			IC00_1		
			TIOA13_2		
			INT05_1		
101	85	J11	P1B	G	M
			AN11		
			SOT4_1		
			IC01_1		
			TIOB13_2		
			INT25_1		
102	86	J10	P1C	G	M
			AN12		
			SCK4_1		
			IC02_1		
			TIOA14_2		
			INT26_1		
103	87	J9	P1D	G	M
			AN13		
			CTS4_1		
			IC03_1		
			TIOB14_2		
			INT27_1		
104	88	H10	P1E	G	M
			AN14		
			RTS4_1		
			DTTI0X_1		
			TIOA15_2		
			INT28_1		

Pin No			Pin name	I/O circuit type	Pin state type	
LQFP-176	LQFP-144	BGA-192				
105	89	H9	P1F	G	M	
			AN15			
			ADTG_5			
			FRCK0_1			
			TIOB15_2			
			INT29_1			
106	-	H13	PB0	E	K	
			SIN7_2			
			TIOA09_1			
			INT16_0			
107	-	H12	PB1	E	K	
			SOT7_2			
			TIOB09_1			
			INT17_0			
108	-	H11	PB2	E	K	
			SCK7_2			
			TIOA10_1			
			INT18_0			
109	-	G13	PB3	E	K	
			TIOB10_1			
			INT19_0			
110	-	G12	PB4	E	K	
			SIN0_2			
			TIOA11_1			
			INT20_0			
111	-	G11	PB5	E	K	
			SOT0_2			
			TIOB11_1			
			INT21_0			
112	-	G10	PB6	E	K	
			SCK0_2			
			TIOA12_1			
			INT22_0			
113	-	G9	PB7	E	K	
			TIOB12_1			
			INT23_0			
114	90	J14	AVCC	-		
115	91	H14	AVSS	-		
-	-	J7	VSS	-		
-	-	P11	VSS	-		

Pin No			Pin name	I/O circuit type	Pin state type
LQFP-176	LQFP-144	BGA-192			
116	92	G14	AVRL	-	-
117	93	F14	AVRH	-	-
118	94	F10	P29	G	L
			AN16		
			SIN12_0		
			P28		
119	95	F11	AN17	G	M
			ADTG_4		
			SOT12_0		
			RTO05_1		
			INT09_0		
			P27		
120	96	F12	AN18	G	M
			SCK12_0		
			RTO04_1		
			INT02_2		
			P26		
121	97	F13	AN19	G	L
			SCK2_1		
			RTO03_1		
			P25		
122	98	E10	AN20	G	L
			SOT2_1		
			RTO02_1		
			P24		
123	99	E11	AN21	G	M
			SIN2_1		
			RTO01_1		
			INT01_2		

Pin No			Pin name	I/O circuit type	Pin state type
LQFP-176	LQFP-144	BGA-192			
124	100	E12	P23	G	L
			AN22		
			SCK0_0		
			RTO00_1		
			TIOA07_1		
125	101	E13	P22	G	L
			AN23		
			SOT0_0		
			ZIN1_1		
			TIOB07_1		
126	102	D12	P21	E	K
			SIN0_0		
			BIN1_1		
			INT06_1		
127	103	D13	P20	E	K
			AIN1_1		
			INT05_0		
			CROUT_0		
128	104	C13	PF6	I*	H
			NMIX		
			WKUP0		
129	105	E14	P82	E	J
			MCSX7_0		
130	106	D14	P83	E	J
			MCSX6_0		
131	107	C14	VCC		-
132	108	G7	VSS		-
133	109	A13	VCC		-
134	110	B13	P00	E	I
			TRSTX		
135	111	A12	P01	E	I
			TCK		
			SWCLK		
136	112	C12	P02	E	I
			TDI		
137	113	B12	P03	E	I
			TMS		
			SWDIO		
138	114	B11	P04	E	I
			TDO		
			SWO		
139	-	C11	P90	E	K
			TIOB08_0		
			INT30_0		
-	-	N14	VSS		-

Pin No			Pin name	I/O circuit type	Pin state type
LQFP-176	LQFP-144	BGA-192			
140	-	D11	P91	E	K
			TIOB09_0		
			INT31_0		
141	-	B10	P92	E	J
			SIN5_1		
			TIOB10_0		
142	-	C10	P93	E	J
			SOT5_1		
			TIOB11_0		
143	-	D10	P94	E	K
			SCK5_1		
			TIOB12_0		
			INT26_0		
144	-	B9	P95	E	K
			TIOB13_0		
			INT27_0		
145	115	C9	PC0	H	O
			DA0_0		
			SIN13_0		
			MCSX5_0		
146	116	B8	PC1	H	O
			DA1_0		
			SOT13_0		
			MCSX4_0		
147	117	D9	PC2	E	J
			SCK13_0		
			MAD00_0		
148	118	E9	PC3	E	J
			TIOA06_1		
			MAD01_0		
149	119	F9	PC4	I*	R
			SIN14_0		
			TIOA08_2		
			CEC0_1		
			MAD02_0		
150	120	C8	PC5	I*	J
			SOT14_0		
			TIOA10_2		
			MAD03_0		
-	-	L14	VSS	-	-

Pin No			Pin name	I/O circuit type	Pin state type
LQFP-176	LQFP-144	BGA-192			
151	121	D8	PC6	I*	J
			SCK14_0		
			TIOA14_0		
			MAD04_0		
152	122	E8	PC7	E	J
			CROUT_1		
			RTCCO_0		
			SUBOUT_0		
			MAD05_0		
153	123	A10	PC8	E	J
			SIN15_0		
			MAD06_0		
154	124	F8	PC9	E	J
			SOT15_0		
			MAD07_0		
155	125	B7	PCA	E	J
			SCK15_0		
			MAD08_0		
156	126	A9	VCC	-	-
157	127	G8	VSS	-	-
158	128	A7	PCB	E	J
			MAD09_0		
159	129	C7	PCC	E	J
			MAD10_0		
160	130	A6	PCD	E	J
			MAD11_0		
161	131	D7	PCE	E	J
			RTS4_0		
			TIOB06_1		
			MAD12_0		
162	132	E7	PCF	E	J
			CTS4_0		
			TIOB08_2		
			MAD13_0		
163	133	F7	PD0	E	K
			SCK4_0		
			TIOB10_2		
			INT30_1		
			MAD14_0		
164	134	B6	PD1	E	K
			SOT4_0		
			TIOB14_0		
			INT31_1		
			MAD15_0		
-	-	B14	VSS	-	-
-	-	H7	VSS	-	-
-	-	B1	VSS	-	-
-	-	G1	VSS	-	-

Pin No			Pin name	I/O circuit type	Pin state type
LQFP-176	LQFP-144	BGA-192			
165	135	C6	PD2	E	K
			SIN4_0		
			TIOA03_2		
			INT00_2		
			MAD16_0		
			PD3		
166	136	D6	TIOB03_2	E	J
			MAD17_0		
			P62		
			ADTG_3		
167	137	E6	SCK5_0	E	J
			MAD18_0		
			P61		
			SOT5_0		
168	138	B5	TIOB02_2	E	J
			MAD19_0		
			P60		
			SIN5_0		
169	139	C5	TIOA02_2	E	U
			INT15_1		
			WKUP5		
			MAD20_0		
			PF3		
			SIN6_2		
170	-	B4	TIOA06_0	I*	K
			INT06_0		
			PF4		
			SOT6_2		
171	-	C4	TIOB06_0	I*	K
			INT07_0		
			PF5		
			IGTRG0_1		
172	140	B3	INT08_0	I*	T
			WKUP3		
			CEC1_0		
			SCK6_2		
173	141	A4	VCC	-	
174	142	A3	P80	K	V
175	143	A2	P81	K	V
176	144	H8	VSS	-	
-	-	J1	VSS	-	

\* : 5V tolerant I/O

### List of pin functions

The number after the underscore ("\_") in pin names such as XXX\_1 and XXX\_2 indicates the relocated port number. For these pins, there are multiple pins that provide the same function for the same channel. Use the extended port function register (EPFR) to select the pin.

Pin function	Pin name	Function description	Pin No		
			LQFP-176	LQFP-144	BGA-192
ADC	ADTG_0	A/D converter external trigger input pin	10	10	E2
	ADTG_1		18	18	F5
	ADTG_2		37	29	K2
	ADTG_3		167	137	E6
	ADTG_4		119	95	F11
	ADTG_5		105	89	H9
	ADTG_6		31	-	H6
	ADTG_7		49	41	L4
	ADTG_8		70	62	P8
	AN00		90	74	M13
	AN01		91	75	M12
	AN02		92	76	L13
	AN03		93	77	L12
	AN04		94	78	L11
	AN05		95	79	K13
	AN06		96	80	K12
	AN07		97	81	K14
	AN08		98	82	K11
	AN09		99	83	J13
	AN10		100	84	J12
	AN11		101	85	J11
	AN12		102	86	J10
	AN13		103	87	J9
	AN14		104	88	H10
	AN15		105	89	H9
	AN16		118	94	F10
	AN17		119	95	F11
	AN18		120	96	F12
	AN19		121	97	F13
	AN20		122	98	E10
	AN21		123	99	E11
	AN22		124	100	E12
	AN23		125	101	E13

Pin function	Pin name	Function description	Pin No		
			LQFP-176	LQFP-144	BGA-192
Base Timer 0	TIOA00_0	Base timer ch.0 TIOA pin	46	38	N2
	TIOA00_1		38	30	K3
	TIOA00_2		11	11	E3
	TIOB00_0	Base timer ch.0 TIOB pin	59	51	L5
	TIOB00_1		28	-	H3
	TIOB00_2		12	12	E4
Base Timer 1	TIOA01_0	Base timer ch.1 TIOA pin	47	39	N3
	TIOA01_1		39	31	K4
	TIOA01_2		16	16	F3
	TIOB01_0	Base timer ch.1 TIOB pin	60	52	K5
	TIOB01_1		29	-	H4
	TIOB01_2		17	17	F4
Base Timer 2	TIOA02_0	Base timer ch.2 TIOA pin	48	40	M3
	TIOA02_1		40	32	L1
	TIOA02_2		169	139	C5
	TIOB02_0	Base timer ch.2 TIOB pin	61	53	N6
	TIOB02_1		30	-	H5
	TIOB02_2		168	138	B5
Base Timer 3	TIOA03_0	Base timer ch.3 TIOA pin	49	41	L4
	TIOA03_1		41	33	L2
	TIOA03_2		165	135	C6
	TIOB03_0	Base timer ch.3 TIOB pin	62	54	M6
	TIOB03_1		31	-	H6
	TIOB03_2		166	136	D6
Base Timer 4	TIOA04_0	Base timer ch.4 TIOA pin	50	42	M4
	TIOA04_1		42	34	L3
	TIOA04_2		65	57	J6
	TIOB04_0	Base timer ch.4 TIOB pin	63	55	L6
	TIOB04_1		32	-	J5
	TIOB04_2		66	58	N8
Base Timer 5	TIOA05_0	Base timer ch.5 TIOA pin	51	43	N4
	TIOA05_1		43	35	M2
	TIOA05_2		8	8	D3
	TIOB05_0	Base timer ch.5 TIOB pin	64	56	K6
	TIOB05_1		33	-	J4
	TIOB05_2		9	9	D4
Base Timer 6	TIOA06_0	Base timer ch.6 TIOA pin	170	-	B4
	TIOA06_1		148	118	E9
	TIOA06_2		25	-	H1
	TIOB06_0	Base timer ch.6 TIOB pin	171	-	C4
	TIOB06_1		161	131	D7
	TIOB06_2		26	-	H2

Pin function	Pin name	Function description	Pin No		
			LQFP-176	LQFP-144	BGA-192
Base Timer 7	TIOA07_0	Base timer ch.7 TIOA pin	77	-	P10
	TIOA07_1		124	100	E12
	TIOA07_2		71	63	J8
	TIOB07_0	Base timer ch.7 TIOB pin	76	-	K9
	TIOB07_1		125	101	E13
	TIOB07_2		72	64	P9
Base Timer 8	TIOA08_0	Base timer ch.8 TIOA pin	2	2	B2
	TIOA08_1		82	-	N11
	TIOA08_2		149	119	F9
	TIOB08_0	Base timer ch.8 TIOB pin	139	-	C11
	TIOB08_1		83	-	M11
	TIOB08_2		162	132	E7
Base Timer 9	TIOA09_0	Base timer ch.9 TIOA pin	3	3	C2
	TIOA09_1		106	-	H13
	TIOA09_2		19	19	F6
	TIOB09_0	Base timer ch.9 TIOB pin	140	-	D11
	TIOB09_1		107	-	H12
	TIOB09_2		20	20	G2
Base Timer 10	TIOA10_0	Base timer ch.10 TIOA pin	4	4	C3
	TIOA10_1		108	-	H11
	TIOA10_2		150	120	C8
	TIOB10_0	Base timer ch.10 TIOB pin	141	-	B10
	TIOB10_1		109	-	G13
	TIOB10_2		163	133	F7
Base Timer 11	TIOA11_0	Base timer ch.11 TIOA pin	5	5	D5
	TIOA11_1		110	-	G12
	TIOA11_2		21	21	G3
	TIOB11_0	Base timer ch.11 TIOB pin	142	-	C10
	TIOB11_1		111	-	G11
	TIOB11_2		22	22	G4
Base Timer 12	TIOA12_0	Base timer ch.12 TIOA pin	6	6	D2
	TIOA12_1		112	-	G10
	TIOA12_2		34	26	J3
	TIOB12_0	Base timer ch.12 TIOB pin	143	-	D10
	TIOB12_1		113	-	G9
	TIOB12_2		35	27	J2
Base Timer 13	TIOA13_0	Base timer ch.13 TIOA pin	7	7	D1
	TIOA13_1		23	23	G5
	TIOA13_2		100	84	J12
	TIOB13_0	Base timer ch.13 TIOB pin	144	-	B9
	TIOB13_1		24	24	G6
	TIOB13_2		101	85	J11

Pin function	Pin name	Function description	Pin No		
			LQFP-176	LQFP-144	BGA-192
Base Timer 14	TIOA14_0	Base timer ch.14 TIOA pin	151	121	D8
	TIOA14_1		78	-	N10
	TIOA14_2		102	86	J10
Base Timer 14	TIOB14_0	Base timer ch.14 TIOB pin	164	134	B6
	TIOB14_1		79	-	L10
	TIOB14_2		103	87	J9
Base Timer 15	TIOA15_0	Base timer ch.15 TIOA pin	73	65	N9
	TIOA15_1		80	-	K10
	TIOA15_2		104	88	H10
Base Timer 15	TIOB15_0	Base timer ch.15 TIOB pin	74	66	M9
	TIOB15_1		81	-	M10
	TIOB15_2		105	89	H9
Debugger	SWCLK	Serial wire debug interface clock input	135	111	A12
	SWDIO	Serial wire debug interface data input / output	137	113	B12
	SWO	Serial wire viewer output	138	114	B11
	TCK	J-TAG test clock input	135	111	A12
	TDI	J-TAG test data input	136	112	C12
	TDO	J-TAG debug data output	138	114	B11
	TMS	J-TAG test mode state input/output	137	113	B12
	TRACECLK	Trace CLK output of ETM	12	12	E4
	TRACED0	Trace data output of ETM	8	8	D3
	TRACED1		9	9	D4
	TRACED2		10	10	E2
	TRACED3		11	11	E3
	TRSTX	J-TAG test reset Input	134	110	B13

Pin function	Pin name	Function description	Pin No		
			LQFP-176	LQFP-144	BGA-192
External Bus	MAD00_0	External bus interface address bus	147	117	D9
	MAD01_0		148	118	E9
	MAD02_0		149	119	F9
	MAD03_0		150	120	C8
	MAD04_0		151	121	D8
	MAD05_0		152	122	E8
	MAD06_0		153	123	A10
	MAD07_0		154	124	F8
	MAD08_0		155	125	B7
	MAD09_0		158	128	A7
	MAD10_0		159	129	C7
	MAD11_0		160	130	A6
	MAD12_0		161	131	D7
	MAD13_0		162	132	E7
	MAD14_0		163	133	F7
	MAD15_0		164	134	B6
	MAD16_0		165	135	C6
	MAD17_0		166	136	D6
	MAD18_0		167	137	E6
	MAD19_0		168	138	B5
	MAD20_0		169	139	C5
	MAD21_0		2	2	B2
	MAD22_0		3	3	C2
	MAD23_0		4	4	C3
	MAD24_0		5	5	D5
External Bus	MCSX0_0	External bus interface chip select output pin	23	23	G5
	MCSX1_0		24	24	G6
	MCSX2_0		46	38	N2
	MCSX3_0		47	39	N3
	MCSX4_0		146	116	B8
	MCSX5_0		145	115	C9
	MCSX6_0		130	106	D14
	MCSX7_0		129	105	E14
External Bus	MDQM0_0	External bus interface byte mask signal output	15	15	F2
	MDQM1_0		16	16	F3
External Bus	MOEX_0	External bus interface read enable signal for SRAM	13	13	E5
	MWEX_0	External bus interface write enable signal for SRAM	14	14	F1

Pin function	Pin name	Function description	Pin No		
			LQFP-176	LQFP-144	BGA-192
External Bus	MNALE_0	External bus interface ALE signal to control NAND Flash output pin	19	19	F6
	MNCLE_0	External bus interface CLE signal to control NAND Flash output pin	20	20	G2
	MNREX_0	External bus interface read enable signal to control NAND Flash	22	22	G4
	MNWEX_0	External bus interface write enable signal to control NAND Flash	21	21	G3
	MADATA00_0	External bus interface data bus (Address / data multiplex bus)	60	52	K5
	MADATA01_0		61	53	N6
	MADATA02_0		62	54	M6
	MADATA03_0		63	55	L6
	MADATA04_0		64	56	K6
	MADATA05_0		65	57	J6
	MADATA06_0		66	58	N8
	MADATA07_0		67	59	M8
	MADATA08_0		68	60	L8
	MADATA09_0		69	61	K8
	MADATA10_0		70	62	P8
	MADATA11_0		71	63	J8
	MADATA12_0		72	64	P9
	MADATA13_0		73	65	N9
	MADATA14_0		74	66	M9
	MADATA15_0		75	67	L9
	MALE_0	External bus interface Address Latch enable output signal for multiplex	17	17	F4
	MRDY_0	External bus interface external RDY input signal	18	18	F5
	MCLKOUT_0	External bus interface external clock output	48	40	M3

Pin function	Pin name	Function description	Pin No		
			LQFP-176	LQFP-144	BGA-192
External Interrupt	INT00_0		13	13	E5
	INT00_1	External interrupt request 00 input pin	8	8	D3
	INT00_2		165	135	C6
	INT01_0		14	14	F1
	INT01_1	External interrupt request 01 input pin	9	9	D4
	INT01_2		123	99	E11
	INT02_0		15	15	F2
	INT02_1	External interrupt request 02 input pin	91	75	M12
	INT02_2		120	96	F12
	INT03_0		6	6	D2
	INT03_1	External interrupt request 03 input pin	94	78	L11
	INT03_2		28	-	H3
	INT04_0		31	-	H6
	INT04_1	External interrupt request 04 input pin	97	81	K14
	INT04_2		29	-	H4
	INT05_0		127	103	D13
	INT05_1	External interrupt request 05 input pin	100	84	J12
	INT05_2		30	-	H5
	INT06_0		170	-	B4
	INT06_1	External interrupt request 06 input pin	126	102	D12
	INT06_2		64	56	K6
	INT07_0		171	-	C4
	INT07_1	External interrupt request 07 input pin	70	62	P8
	INT07_2		16	16	F3
	INT08_0		172	140	B3
	INT08_1	External interrupt request 08 input pin	33	-	J4
	INT08_2		19	19	F6
	INT09_0		119	95	F11
	INT09_1	External interrupt request 09 input pin	34	26	J3
	INT09_2		22	22	G4
	INT10_0		76	-	K9
	INT10_1	External interrupt request 10 input pin	35	27	J2
	INT10_2		7	7	D1
	INT11_0		77	-	P10
	INT11_1	External interrupt request 11 input pin	36	28	K1
	INT11_2		71	63	J8
	INT12_0		78	-	N10
	INT12_1	External interrupt request 12 input pin	46	38	N2
	INT12_2		72	64	P9
	INT13_0		81	-	M10
	INT13_1	External interrupt request 13 input pin	47	39	N3
	INT13_2		66	58	N8
	INT14_0		82	-	N11
	INT14_1	External interrupt request 14 input pin	58	50	M5
	INT14_2		67	59	M8

Pin function	Pin name	Function description	Pin No		
			LQFP-176	LQFP-144	BGA-192
External Interrupt	INT15_0		83	-	M11
	INT15_1	External interrupt request 15 input pin	169	139	C5
	INT15_2		68	60	L8
	INT16_0		106	-	H13
	INT16_1	External interrupt request 16 input pin	20	20	G2
	INT17_0		107	-	H12
	INT17_1	External interrupt request 17 input pin	21	21	G3
	INT18_0		108	-	H11
	INT18_1	External interrupt request 18 input pin	23	23	G5
	INT19_0		109	-	G13
	INT19_1	External interrupt request 19 input pin	24	24	G6
	INT20_0		110	-	G12
	INT20_1	External interrupt request 20 input pin	96	80	K12
	INT21_0		111	-	G11
	INT21_1	External interrupt request 21 input pin	98	82	K11
	INT22_0		112	-	G10
	INT22_1	External interrupt request 22 input pin	99	83	J13
	INT23_0		113	-	G9
	INT23_1	External interrupt request 23 input pin	74	66	M9
	INT24_0		79	-	L10
	INT24_1	External interrupt request 24 input pin	75	67	L9
	INT25_0		80	-	K10
	INT25_1	External interrupt request 25 input pin	101	85	J11
	INT26_0		143	-	D10
	INT26_1	External interrupt request 26 input pin	102	86	J10
	INT27_0		144	-	B9
	INT27_1	External interrupt request 27 input pin	103	87	J9
	INT28_0		25	-	H1
	INT28_1	External interrupt request 28 input pin	104	88	H10
	INT29_0		26	-	H2
	INT29_1	External interrupt request 29 input pin	105	89	H9
	INT30_0		139	-	C11
	INT30_1	External interrupt request 30 input pin	163	133	F7
	INT31_0		140	-	D11
	INT31_1	External interrupt request 31 input pin	164	134	B6
	NMIX	Non-Maskable Interrupt input	128	104	C13

Pin function	Pin name	Function description	Pin No		
			LQFP-176	LQFP-144	BGA-192
GPIO	P00	General-purpose I/O port 0	134	110	B13
	P01		135	111	A12
	P02		136	112	C12
	P03		137	113	B12
	P04		138	114	B11
	P05		8	8	D3
	P06		9	9	D4
	P07		10	10	E2
	P08		11	11	E3
	P09		12	12	E4
GPIO	P10	General-purpose I/O port 1	90	74	M13
	P11		91	75	M12
	P12		92	76	L13
	P13		93	77	L12
	P14		94	78	L11
	P15		95	79	K13
	P16		96	80	K12
	P17		97	81	K14
	P18		98	82	K11
	P19		99	83	J13
GPIO	P1A	General-purpose I/O port 2	100	84	J12
	P1B		101	85	J11
	P1C		102	86	J10
	P1D		103	87	J9
	P1E		104	88	H10
	P1F		105	89	H9
	P20		127	103	D13
	P21		126	102	D12
	P22		125	101	E13
	P23		124	100	E12
GPIO	P24	General-purpose I/O port 2	123	99	E11
	P25		122	98	E10
	P26		121	97	F13
	P27		120	96	F12
	P28		119	95	F11
	P29		118	94	F10

Pin function	Pin name	Function description	Pin No		
			LQFP-176	LQFP-144	BGA-192
GPIO	P30	General-purpose I/O port 3	28	-	H3
	P31		29	-	H4
	P32		30	-	H5
	P33		31	-	H6
	P34		32	-	J5
	P35		33	-	J4
	P36		34	26	J3
	P37		35	27	J2
	P38		36	28	K1
	P39		37	29	K2
	P3A		38	30	K3
	P3B		39	31	K4
	P3C		40	32	L1
	P3D		41	33	L2
	P3E		42	34	L3
	P3F		43	35	M2
	P40		46	38	N2
	P41		47	39	N3
	P42		48	40	M3
	P43		49	41	L4
	P44		50	42	M4
	P45		51	43	N4
	P46		55	47	P5
	P47		56	48	P6
	P48	General-purpose I/O port 4	58	50	M5
	P49		59	51	L5
	P4A		60	52	K5
	P4B		61	53	N6
	P4C		62	54	M6
	P4D		63	55	L6
	P4E		64	56	K6
	P50		13	13	E5
	P51		14	14	F1
	P52		15	15	F2
	P53		16	16	F3
	P54		17	17	F4
	P55		18	18	F5
	P56		19	19	F6
	P57		20	20	G2
	P58		21	21	G3
	P59		22	22	G4
	P5A	General-purpose I/O port 5	23	23	G5
	P5B		24	24	G6
	P5C		25	-	H1
	P5D		26	-	H2

Pin function	Pin name	Function description	Pin No		
			LQFP-176	LQFP-144	BGA-192
GPIO	P60	General-purpose I/O port 6	169	139	C5
	P61		168	138	B5
	P62		167	137	E6
	P70		65	57	J6
	P71		66	58	N8
	P72		67	59	M8
	P73		68	60	L8
	P74		69	61	K8
	P75		70	62	P8
	P76		71	63	J8
	P77		72	64	P9
	P78		73	65	N9
	P79		74	66	M9
	P7A		75	67	L9
	P7B		76	-	K9
	P7C		77	-	P10
	P7D		78	-	N10
	P7E		79	-	L10
	P7F		80	-	K10
	P80	General-purpose I/O port 8	174	142	A3
	P81		175	143	A2
	P82		129	105	E14
	P83		130	106	D14
	P90	General-purpose I/O port 9	139	-	C11
	P91		140	-	D11
	P92		141	-	B10
	P93		142	-	C10
	P94		143	-	D10
	P95		144	-	B9
	PA0	General-purpose I/O port A	2	2	B2
	PA1		3	3	C2
	PA2		4	4	C3
	PA3		5	5	D5
	PA4		6	6	D2
	PA5		7	7	D1
	PB0	General-purpose I/O port B	106	-	H13
	PB1		107	-	H12
	PB2		108	-	H11
	PB3		109	-	G13
	PB4		110	-	G12
	PB5		111	-	G11
	PB6		112	-	G10
	PB7		113	-	G9

Pin function	Pin name	Function description	Pin No		
			LQFP-176	LQFP-144	BGA-192
GPIO	PC0	General-purpose I/O port C	145	115	C9
	PC1		146	116	B8
	PC2		147	117	D9
	PC3		148	118	E9
	PC4		149	119	F9
	PC5		150	120	C8
	PC6		151	121	D8
	PC7		152	122	E8
	PC8		153	123	A10
	PC9		154	124	F8
	PCA		155	125	B7
	PCB		158	128	A7
	PCC		159	129	C7
	PCD		160	130	A6
	PCE		161	131	D7
	PCF		162	132	E7
PD0	PD0	General-purpose I/O port D	163	133	F7
	PD1		164	134	B6
	PD2		165	135	C6
	PD3		166	136	D6
PE0	PE0	General-purpose I/O port E	84	68	N13
	PE2		86	70	P12
	PE3		87	71	P13
PF0	PF0	General-purpose I/O port F*	81	-	M10
	PF1		82	-	N11
	PF2		83	-	M11
	PF3		170	-	B4
	PF4		171	-	C4
	PF5		172	140	B3
	PF6		128	104	C13

Pin function	Pin name	Function description	Pin No.		
			LQFP-176	LQFP-144	BGA-192
Multi Function Serial 0	SINO_0	Multifunction serial interface ch.0 input pin	126	102	D12
	SINO_1		94	78	L11
	SINO_2		110	-	G12
	SOTO_0 (SDA0_0)	Multifunction serial interface ch.0 output pin. This pin operates as SOT0 when it is used in a UART/CSIO/LIN (operation modes 0 to 3) and as SDA0 when it is used in an I <sup>2</sup> C (operation mode 4).	125	101	E13
	SOTO_1 (SDA0_1)		95	79	K13
	SOTO_2 (SDA0_2)		111	-	G11
	SCK0_0 (SCL0_0)	Multifunction serial interface ch.0 clock I/O pin. This pin operates as SCK0 when it is used in a UART/CSIO (operation modes 0 to 2) and as SCL0 when it is used in an I <sup>2</sup> C (operation mode 4).	124	100	E12
	SCK0_1 (SCL0_1)		96	80	K12
	SCK0_2 (SCL0_2)		112	-	G10
Multi Function Serial 1	SIN1_0	Multifunction serial interface ch.1 input pin	19	19	F6
	SIN1_1		91	75	M12
	SIN1_2		81	-	M10
	SOT1_0 (SDA1_0)	Multifunction serial interface ch.1 output pin. This pin operates as SOT1 when it is used in a UART/CSIO/LIN (operation modes 0 to 3) and as SDA1 when it is used in an I <sup>2</sup> C (operation mode 4).	20	20	G2
	SOT1_1 (SDA1_1)		92	76	L13
	SOT1_2 (SDA1_2)		82	-	N11
	SCK1_0 (SCL1_0)	Multifunction serial interface ch.1 clock I/O pin. This pin operates as SCK1 when it is used in a UART/CSIO (operation modes 0 to 2) and as SCL1 when it is used in an I <sup>2</sup> C (operation mode 4).	21	21	G3
	SCK1_1 (SCL1_1)		93	77	L12
	SCK1_2 (SCL1_2)		83	-	M11

Pin function	Pin name	Function description	Pin No.		
			LQFP-176	LQFP-144	BGA-192
Multi Function Serial 2	SIN2_0	Multifunction serial interface ch.2 input pin	67	59	M8
	SIN2_1		123	99	E11
	SIN2_2		97	81	K14
	SOT2_0 (SDA2_0)	Multifunction serial interface ch.2 output pin. This pin operates as SOT2 when it is used in a UART/CSIO/LIN (operation modes 0 to 3) and as SDA2 when it is used in an I <sup>2</sup> C (operation mode 4).	68	60	L8
	SOT2_1 (SDA2_1)		122	98	E10
	SOT2_2 (SDA2_2)		98	82	K11
	SCK2_0 (SCL2_0)	Multifunction serial interface ch.2 clock I/O pin. This pin operates as SCK2 when it is used in a UART/CSIO (operation modes 0 to 2) and as SCL2 when it is used in an I <sup>2</sup> C (operation mode 4).	69	61	K8
	SCK2_1 (SCL2_1)		121	97	F13
	SCK2_2 (SCL2_2)		99	83	J13
Multi Function Serial 3	SIN3_0	Multifunction serial interface ch.3 input pin	70	62	P8
	SIN3_1		13	13	E5
	SIN3_2		58	50	M5
	SOT3_0 (SDA3_0)	Multifunction serial interface ch.3 output pin. This pin operates as SOT3 when it is used in a UART/CSIO/LIN (operation modes 0 to 3) and as SDA3 when it is used in an I <sup>2</sup> C (operation mode 4).	71	63	J8
	SOT3_1 (SDA3_1)		14	14	F1
	SOT3_2 (SDA3_2)		59	51	L5
	SCK3_0 (SCL3_0)	Multifunction serial interface ch.3 clock I/O pin. This pin operates as SCK3 when it is used in a UART/CSIO (operation modes 0 to 2) and as SCL3 when it is used in an I <sup>2</sup> C (operation mode 4).	72	64	P9
	SCK3_1 (SCL3_1)		15	15	F2
	SCK3_2 (SCL3_2)		60	52	K5

Pin function	Pin name	Function description	Pin No.		
			LQFP-176	LQFP-144	BGA-192
Multi Function Serial 4	SIN4_0	Multifunction serial interface ch.4 input pin	165	135	C6
	SIN4_1		100	84	J12
	SIN4_2		8	8	D3
	SOT4_0 (SDA4_0)	Multifunction serial interface ch.4 output pin. This pin operates as SOT4 when it is used in a UART/CSIO/LIN (operation modes 0 to 3) and as SDA4 when it is used in an I <sup>2</sup> C (operation mode 4).	164	134	B6
	SOT4_1 (SDA4_1)		101	85	J11
	SOT4_2 (SDA4_2)		9	9	D4
	SCK4_0 (SCL4_0)	Multifunction serial interface ch.4 clock I/O pin. This pin operates as SCK4 when it is used in a UART/CSIO (operation modes 0 to 2) and as SCL4 when it is used in an I <sup>2</sup> C (operation mode 4).	163	133	F7
	SCK4_1 (SCL4_1)		102	86	J10
	SCK4_2 (SCL4_2)		10	10	E2
	RTS4_0	Multifunction serial interface ch.4 RTS output pin	161	131	D7
	RTS4_1		104	88	H10
	RTS4_2		12	12	E4
Multi Function Serial 5	CTS4_0	Multifunction serial interface ch.4 CTS input pin	162	132	E7
	CTS4_1		103	87	J9
	CTS4_2		11	11	E3
	SIN5_0	Multifunction serial interface ch.5 input pin	169	139	C5
	SIN5_1		141	-	B10
	SIN5_2		34	26	J3
	SOT5_0 (SDA5_0)	Multifunction serial interface ch.5 output pin. This pin operates as SOT5 when it is used in a UART/CSIO/LIN (operation modes 0 to 3) and as SDA5 when it is used in an I <sup>2</sup> C (operation mode 4).	168	138	B5
	SOT5_1 (SDA5_1)		142	-	C10
	SOT5_2 (SDA5_2)		35	27	J2
	SCK5_0 (SCL5_0)	Multifunction serial interface ch.5 clock I/O pin. This pin operates as SCK5 when it is used in a UART/CSIO (operation modes 0 to 2) and as SCL5 when it is used in an I <sup>2</sup> C (operation mode 4).	167	137	E6
	SCK5_1 (SCL5_1)		143	-	D10
	SCK5_2 (SCL5_2)		36	28	K1

Pin function	Pin name	Function description	Pin No.		
			LQFP-176	LQFP-144	BGA-192
Multi Function Serial 6	SIN6_0	Multifunction serial interface ch.6 input pin	16	16	F3
	SIN6_1		31	-	H6
	SIN6_2		170	-	B4
	SOT6_0 (SDA6_0)	Multifunction serial interface ch.6 output pin. This pin operates as SOT6 when it is used in a UART/CSIO/LIN (operation modes 0 to 3) and as SDA6 when it is used in an I <sup>2</sup> C (operation mode 4).	17	17	F4
	SOT6_1 (SDA6_1)		30	-	H5
	SOT6_2 (SDA6_2)		171	-	C4
	SCK6_0 (SCL6_0)	Multifunction serial interface ch.6 clock I/O pin. This pin operates as SCK6 when it is used in a UART/CSIO (operation modes 0 to 2) and as SCL6 when it is used in an I <sup>2</sup> C (operation mode 4).	18	18	F5
	SCK6_1 (SCL6_1)		29	-	H4
	SCK6_2 (SCL6_2)		172	-	B3
Multi Function Serial 7	SIN7_0	Multifunction serial interface ch.7 input pin	22	22	G4
	SIN7_1		64	56	K6
	SIN7_2		106	-	H13
	SOT7_0 (SDA7_0)	Multifunction serial interface ch.7 output pin. This pin operates as SOT7 when it is used in a UART/CSIO/LIN (operation modes 0 to 3) and as SDA7 when it is used in an I <sup>2</sup> C (operation mode 4).	23	23	G5
	SOT7_1 (SDA7_1)		63	55	L6
	SOT7_2 (SDA7_2)		107	-	H12
	SCK7_0 (SCL7_0)	Multifunction serial interface ch.7 clock I/O pin. This pin operates as SCK7 when it is used in a UART/CSIO (operation modes 0 to 2) and as SCL7 when it is used in an I <sup>2</sup> C (operation mode 4).	24	24	G6
	SCK7_1 (SCL7_1)		62	54	M6
	SCK7_2 (SCL7_2)		108	-	H11

Pin function	Pin name	Function description	Pin No.		
			LQFP-176	LQFP-144	BGA-192
Multi Function Serial 8	SIN8_0	Multifunction serial interface ch.8 input pin	2	2	B2
	SOT8_0 (SDA8_0)	Multifunction serial interface ch.6 output pin. This pin operates as SOT8 when it is used in a UART/CSIO/LIN (operation modes 0 to 3) and as SDA8 when it is used in an I <sup>2</sup> C (operation mode 4).	3	3	C2
	SCK8_0 (SCL8_0)	Multifunction serial interface ch.7 clock I/O pin. This pin operates as SCK8 when it is used in a UART/CSIO (operation modes 0 to 2) and as SCL8 when it is used in an I <sup>2</sup> C (operation mode 4).	4	4	C3
Multi Function Serial 9	SIN9_0	Multifunction serial interface ch.9 input pin	5	5	D5
	SOT9_0 (SDA9_0)	Multifunction serial interface ch.9 output pin. This pin operates as SOT9 when it is used in a UART/CSIO/LIN (operation modes 0 to 3) and as SDA9 when it is used in an I <sup>2</sup> C (operation mode 4).	6	6	D2
	SCK9_0 (SCL9_0)	Multifunction serial interface ch.9 clock I/O pin. This pin operates as SCK9 when it is used in a UART/CSIO (operation modes 0 to 2) and as SCL9 when it is used in an I <sup>2</sup> C (operation mode 4).	7	7	D1

Pin function	Pin name	Function description	Pin No.		
			LQFP-176	LQFP-144	BGA-192
Multi Function Serial 10	SIN10_0	Multifunction serial interface ch.10 input pin	46	38	N2
	SOT10_0 (SDA10_0)	Multifunction serial interface ch.10 output pin. This pin operates as SOT10 when it is used in a UART/CSIO/LIN (operation modes 0 to 3) and as SDA10 when it is used in an I <sup>2</sup> C (operation mode 4).	47	39	N3
	SCK10_0 (SCL10_0)	Multifunction serial interface ch.10 clock I/O pin. This pin operates as SCK10 when it is used in a UART/CSIO (operation modes 0 to 2) and as SCL10 when it is used in an I <sup>2</sup> C (operation mode 4).	48	40	M3
Multi Function Serial 11	SIN11_0	Multifunction serial interface ch.11 input pin	49	41	L4
	SOT11_0 (SDA11_0)	Multifunction serial interface ch.11 output pin. This pin operates as SOT11 when it is used in a UART/CSIO/LIN (operation modes 0 to 3) and as SDA11 when it is used in an I <sup>2</sup> C (operation mode 4).	50	42	M4
	SCK11_0 (SCL11_0)	Multifunction serial interface ch.11 clock I/O pin. This pin operates as SCK11 when it is used in a UART/CSIO (operation modes 0 to 2) and as SCL11 when it is used in an I <sup>2</sup> C (operation mode 4).	51	43	N4

Pin function	Pin name	Function description	Pin No.		
			LQFP-176	LQFP-144	BGA-192
Multi Function Serial 12	SIN12_0	Multifunction serial interface ch.12 input pin	118	94	F10
	SOT12_0 (SDA12_0)	Multifunction serial interface ch.12 output pin. This pin operates as SOT12 when it is used in a UART/CSIO/LIN (operation modes 0 to 3) and as SDA12 when it is used in an I <sup>2</sup> C (operation mode 4).	119	95	F11
	SCK12_0 (SCL12_0)	Multifunction serial interface ch.12 clock I/O pin. This pin operates as SCK12 when it is used in a UART/CSIO (operation modes 0 to 2) and as SCL12 when it is used in an I <sup>2</sup> C (operation mode 4).	120	96	F12
Multi Function Serial 13	SIN13_0	Multifunction serial interface ch.13 input pin	145	115	C9
	SOT13_0 (SDA13_0)	Multifunction serial interface ch.13 output pin. This pin operates as SOT13 when it is used in a UART/CSIO/LIN (operation modes 0 to 3) and as SDA13 when it is used in an I <sup>2</sup> C (operation mode 4).	146	116	B8
	SCK13_0 (SCL13_0)	Multifunction serial interface ch.13 clock I/O pin. This pin operates as SCK13 when it is used in a UART/CSIO (operation modes 0 to 2) and as SCL13 when it is used in an I <sup>2</sup> C (operation mode 4).	147	117	D9

Pin function	Pin name	Function description	Pin No.		
			LQFP-176	LQFP-144	BGA-192
Multi Function Serial 14	SIN14_0	Multifunction serial interface ch.14 input pin	149	119	F9
	SOT14_0 (SDA14_0)	Multifunction serial interface ch.14 output pin. This pin operates as SOT14 when it is used in a UART/CSIO/LIN (operation modes 0 to 3) and as SDA14 when it is used in an I <sup>2</sup> C (operation mode 4).	150	120	C8
	SCK14_0 (SCL14_0)	Multifunction serial interface ch.14 clock I/O pin. This pin operates as SCK14 when it is used in a UART/CSIO (operation modes 0 to 2) and as SCL14 when it is used in an I <sup>2</sup> C (operation mode 4).	151	121	D8
Multi Function Serial 15	SIN15_0	Multifunction serial interface ch.15 input pin	153	123	A10
	SOT15_0 (SDA15_0)	Multifunction serial interface ch.15 output pin. This pin operates as SOT15 when it is used in a UART/CSIO/LIN (operation modes 0 to 3) and as SDA15 when it is used in an I <sup>2</sup> C (operation mode 4).	154	124	F8
	SCK15_0 (SCL15_0)	Multifunction serial interface ch.15 clock I/O pin. This pin operates as SCK15 when it is used in a UART/CSIO (operation modes 0 to 2) and as SCL15 when it is used in an I <sup>2</sup> C (operation mode 4).	155	125	B7

Pin function	Pin name	Function description	Pin No		
			LQFP-176	LQFP-144	BGA-192
Multi Function Timer 0	DTTI0X_0	Input signal controlling wave form generator outputs RTO00 to RTO05 of multi-function timer 0.  16-bit free-run timer ch.0 external clock input pin  ICxx describes channel number.	37	29	K2
	DTTI0X_1		104	88	H10
	FRCK0_0		32	-	J5
	FRCK0_1		105	89	H9
	FRCK0_2		91	75	M12
	IC00_0		36	28	K1
	IC00_1		100	84	J12
	IC00_2		92	76	L13
	IC01_0		35	27	J2
	IC01_1		101	85	J11
	IC01_2		93	77	L12
	IC02_0		34	26	J3
	IC02_1		102	86	J10
	IC02_2		94	78	L11
	IC03_0		33	-	J4
	IC03_1		103	87	J9
	IC03_2		95	79	K13
	RTO00_0 (PPG00_0)	Wave form generator output of multi-function timer 0.  This pin operates as PPG00 when it is used in PPG0 output modes.	38	30	K3
	RTO00_1 (PPG00_1)		124	100	E12
	RTO01_0 (PPG00_0)		39	31	K4
	RTO01_1 (PPG00_1)		123	99	E11
	RTO02_0 (PPG02_0)		40	32	L1
	RTO02_1 (PPG02_1)		122	98	E10
	RTO03_0 (PPG02_0)		41	33	L2
	RTO03_1 (PPG02_1)		121	97	F13
	RTO04_0 (PPG04_0)		42	34	L3
	RTO04_1 (PPG04_1)		120	96	F12
	RTO05_0 (PPG04_0)		43	35	M2
	RTO05_1 (PPG04_1)		119	95	F11
	IGTRG0_0	PPG IGBT mode external trigger input pin	61	53	N6
	IGTRG0_1		172	140	B3


Pin function	Pin name	Function description	Pin No		
			LQFP-176	LQFP-144	BGA-192
Quadrature Position/ Revolution Counter 0	AIN0_0	QPRC ch.0 AIN input pin	28	-	H3
	AIN0_1		59	51	L5
	AIN0_2		13	13	E5
	BIN0_0	QPRC ch.0 BIN input pin	29	-	H4
	BIN0_1		60	52	K5
	BIN0_2		14	14	F1
	ZIN0_0	QPRC ch.0 ZIN input pin	30	-	H5
	ZIN0_1		61	53	N6
	ZIN0_2		15	15	F2
Quadrature Position/ Revolution Counter 1	AIN1_0	QPRC ch.1 AIN input pin	73	65	N9
	AIN1_1		127	103	D13
	AIN1_2		62	54	M6
	BIN1_0	QPRC ch.1 BIN input pin	74	66	M9
	BIN1_1		126	102	D12
	BIN1_2		63	55	L6
	ZIN1_0	QPRC ch.1 ZIN input pin	75	67	L9
	ZIN1_1		125	101	E13
	ZIN1_2		64	56	K6
CAN	TX0_0	CAN interface ch.0 TX output	65	57	J6
	TX0_1		32	-	J5
	TX0_2		7	7	D1
	RX0_0	CAN interface ch.0 RX output	66	58	N8
	RX0_1		33	-	J4
	RX0_2		6	6	D2
Real-time clock	RTCCO_0	0.5 seconds pulse output pin of Real-time clock	152	122	E8
	RTCCO_1		93	77	L12
	RTCCO_2		37	29	K2
	SUBOUT_0	Sub clock output pin	152	122	E8
	SUBOUT_1		93	77	L12
	SUBOUT_2		37	29	K2



Pin function	Pin name	Function description	Pin No		
			LQFP-176	LQFP-144	BGA-192
RESET	INITX	External Reset Input. A reset is valid when INITX="L".	57	49	N5
Mode	MD0	Mode 0 Pin. During normal operation, MD0="L" must be input. During serial programming to Flash memory, MD0="H" must be input.	85	69	N12
	MD1	Mode 1 Pin. During serial programming to Flash memory, MD1="L" must be input.	84	68	N13
POWER	VCC	Power supply Pin	1	1	C1
			45	37	N1
			54	46	P4
			89	73	M14
			131	107	C14
			133	109	A13
			156	126	A9
Low-Power Consumption Mode	WKUP0	Deep standby mode return signal input pin 0	128	104	C13
	WKUP1	Deep standby mode return signal input pin 1	91	75	M12
	WKUP2	Deep standby mode return signal input pin 2	67	59	M8
	WKUP3	Deep standby mode return signal input pin 3	172	140	B3
	WKUP4	Deep standby mode return signal input pin 4	28	-	H3
	WKUP5	Deep standby mode return signal input pin 5	169	139	C5
HDMI-CEC/ Remote Control Reception	CEC0_0	HDMI-CEC/Remote Control Reception ch.0 input/output pin	81	-	M10
	CEC0_1		149	119	F9
	CEC1_0	HDMI-CEC/Remote Control Reception ch.1 input/output pin	172	140	B3
	CEC1_1		19	19	F6
DAC	DA0_0	D/A converter ch.0 analog output pin	145	115	C9
	DA1_0	D/A converter ch.1 analog output pin	146	116	B8


Pin function	Pin name	Function description	Pin No		
			LQFP-176	LQFP-144	BGA-192
GND	VSS	GND Pin	27	25	A5
			44	36	A8
			53	45	A11
			88	72	E1
			132	108	G7
			157	127	G8
			176	144	H8
			-	-	M1
			-	-	P3
			-	-	P7
			-	-	N7
			-	-	M7
			-	-	L7
			-	-	K7
			-	-	J7
			-	-	P11
			-	-	N14
			-	-	L14
			-	-	B14
			-	-	H7
			-	-	B1
			-	-	G1
			-	-	J1
CLOCK	X0	Main clock (oscillation) input pin	86	70	P12
	X0A	Sub clock (oscillation) input pin	55	47	P5
	X1	Main clock (oscillation) I/O pin	87	71	P13
	X1A	Sub clock (oscillation) I/O pin	56	48	P6
	CROUT_0	Built-in high-speed CR-osc clock output port	127	103	D13
	CROUT_1		152	122	E8
Analog POWER	AVCC	A/D converter, D/A converter analog power pin	114	90	J14
	AVRH	A/D converter analog reference voltage input pin	117	93	F14
Analog GND	AVSS	A/D converter, D/A converter GND pin	115	91	H14
	AVRL	A/D converter analog reference voltage input pin	116	92	G14
C pin	C	Power supply stabilization capacity pin	52	44	P2



\* : 5V tolerant I/O



## 5. I/O Circuit Type



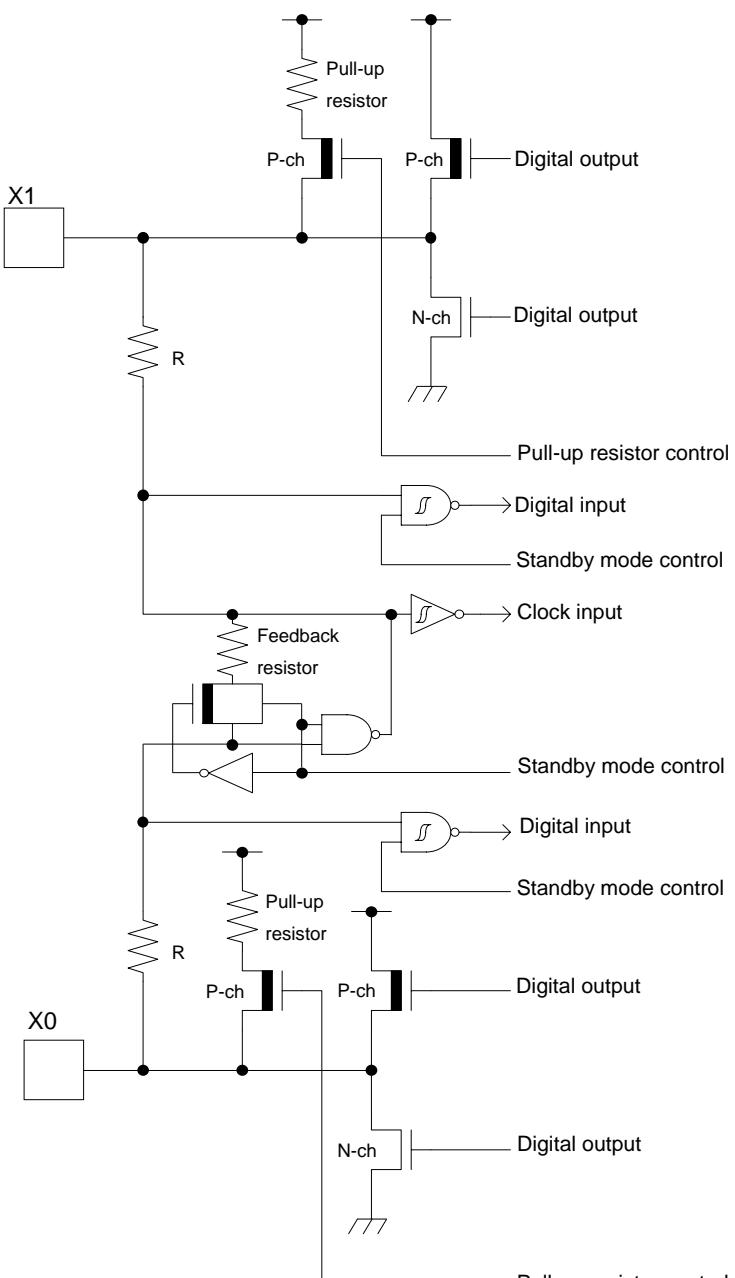
Type	Circuit	Remarks
A	 <p>Detailed description of the circuit:</p> <ul style="list-style-type: none"> <li><b>X1 Section:</b> Contains two digital output paths (P-ch and N-ch), a pull-up resistor control path, a digital input path with a JFET, a standby mode control path, and a clock input path with a feedback resistor.</li> <li><b>X0 Section:</b> Contains two digital output paths (P-ch and N-ch), a pull-up resistor control path, a digital input path with a JFET, and a standby mode control path.</li> </ul>	<p>It is possible to select the main oscillation / GPIO function</p> <p>When the main oscillation is selected.</p> <ul style="list-style-type: none"> <li>Oscillation feedback resistor : Approximately 1 MΩ</li> <li>With Standby mode control</li> </ul> <p>When the GPIO is selected.</p> <ul style="list-style-type: none"> <li>CMOS level output.</li> <li>CMOS level hysteresis input</li> <li>With pull-up resistor control</li> <li>With standby mode control</li> <li>Pull-up resistor : Approximately 50 kΩ</li> <li><math>I_{OH} = -4 \text{ mA}</math>, <math>I_{OL} = 4 \text{ mA}</math></li> </ul>

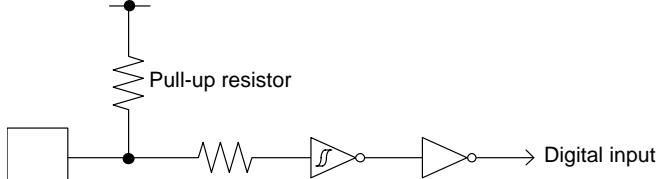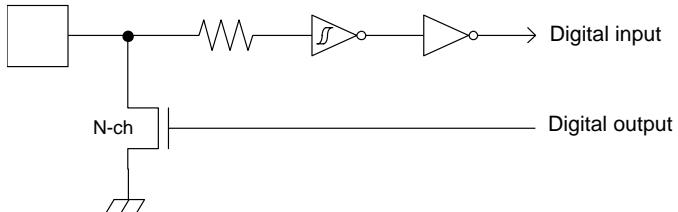Type	Circuit	Remarks
B	 <p>Pull-up resistor</p> <p>Digital input</p>	<ul style="list-style-type: none"> <li>CMOS level hysteresis input</li> <li>Pull-up resistor : Approximately 50 kΩ</li> </ul>
C	 <p>N-ch</p> <p>Digital output</p>	<ul style="list-style-type: none"> <li>Open drain output</li> <li>CMOS level hysteresis input</li> </ul>

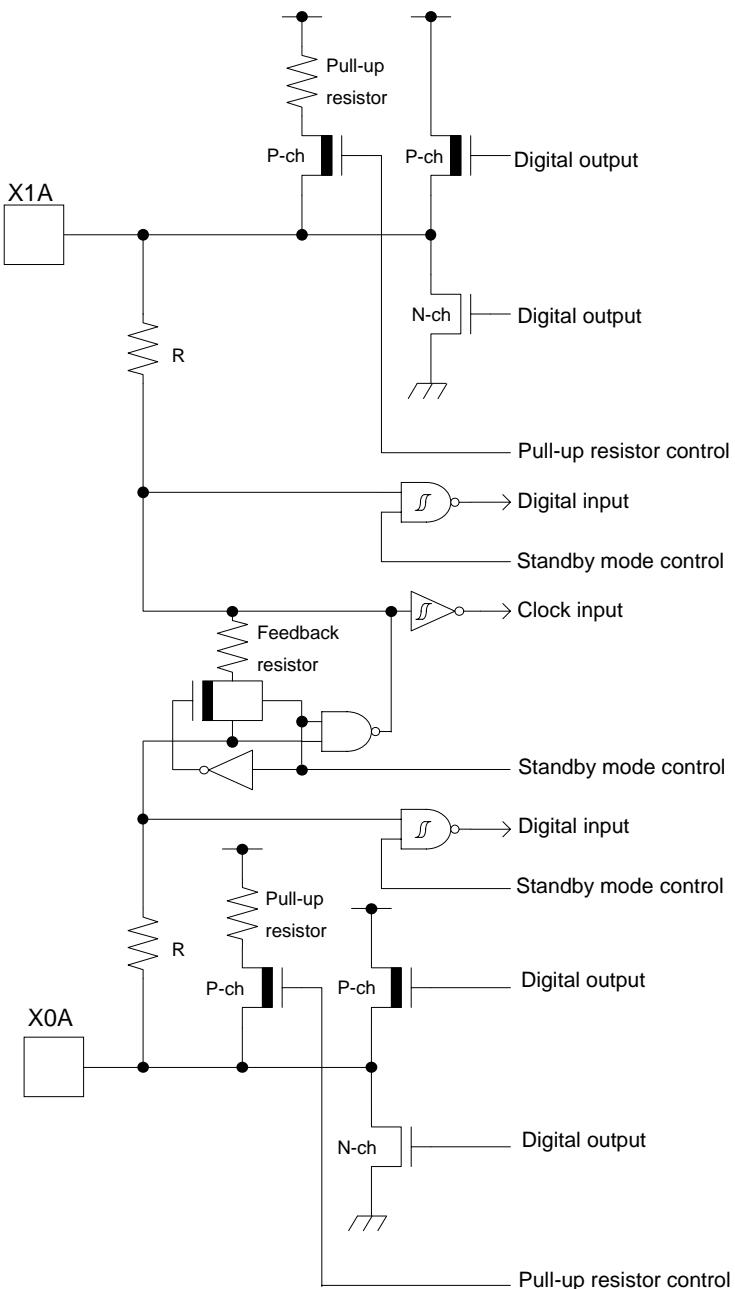Type	Circuit	Remarks
D	 <p>The circuit diagram illustrates the internal structure of the MB9B420TA Series for Type D. It shows two parallel paths for X1A and X0A. Each path consists of a pull-up resistor, a P-channel switch, a N-channel switch, and a digital output. There are also controls for the pull-up resistor and digital inputs. The circuit includes a feedback resistor and a clock input. The X0A path has an additional set of digital output controls.</p>	<p>It is possible to select the sub oscillation / GPIO function</p> <p>When the sub oscillation is selected.</p> <ul style="list-style-type: none"> <li>Oscillation feedback resistor : Approximately <math>5\text{ M}\Omega</math></li> <li>With Standby mode control</li> </ul> <p>When the GPIO is selected.</p> <ul style="list-style-type: none"> <li>CMOS level output.</li> <li>CMOS level hysteresis input</li> <li>With pull-up resistor control</li> <li>With standby mode control</li> <li>Pull-up resistor : Approximately <math>50\text{ k}\Omega</math></li> <li><math>I_{OH} = -4\text{ mA}</math>, <math>I_{OL} = 4\text{ mA}</math></li> </ul>

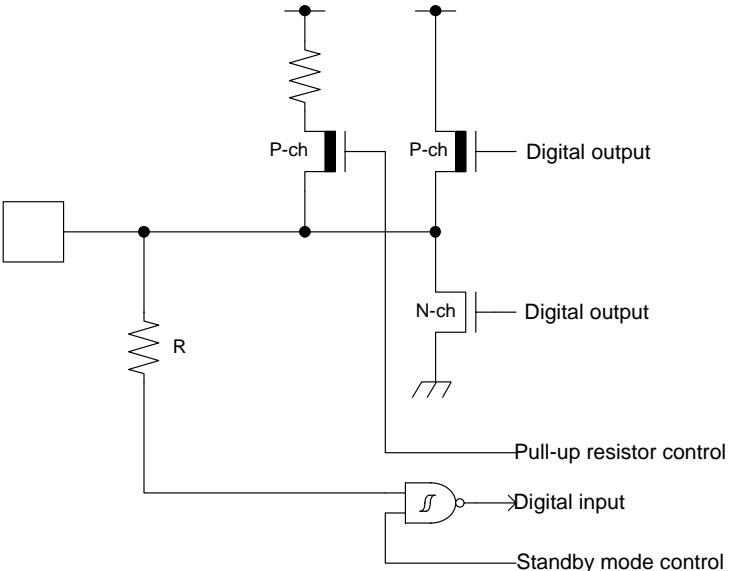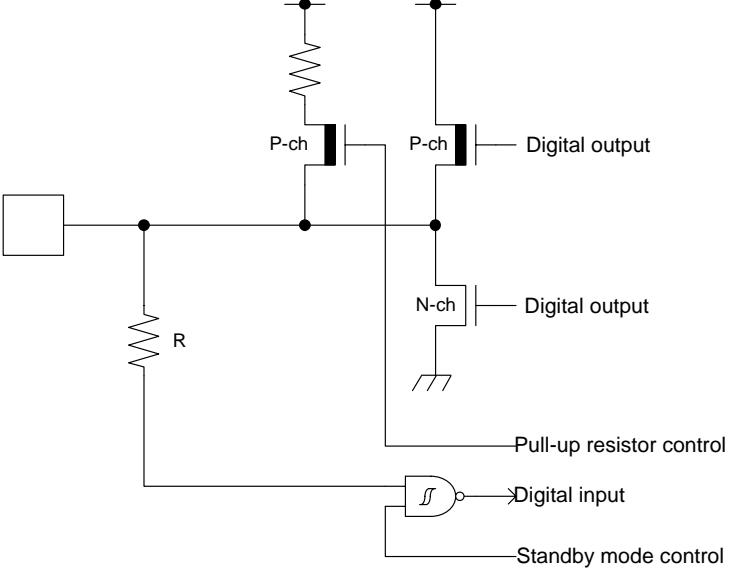Type	Circuit	Remarks
E	 <p>The circuit diagram illustrates a CMOS level output stage. It features two parallel branches. The top branch contains a P-channel MOSFET (P-ch) with its drain connected to the digital output. The bottom branch contains an N-channel MOSFET (N-ch) with its drain also connected to the digital output. Both transistors are controlled by a common gate signal. A resistor labeled 'R' is connected between the drains of the P-ch and N-ch transistors. A digital input signal is connected to the gate of the N-ch transistor through an inverter. A 'Pull-up resistor control' signal is connected to the gate of the P-ch transistor. A 'Standby mode control' signal is connected to the gate of the N-ch transistor through another inverter.</p>	<ul style="list-style-type: none"> <li>CMOS level output</li> <li>CMOS level hysteresis input</li> <li>With pull-up resistor control</li> <li>With standby mode control</li> <li>Pull-up resistor : Approximately 50 kΩ</li> <li><math>I_{OH} = -4 \text{ mA}</math>, <math>I_{OL} = 4 \text{ mA}</math></li> <li>When this pin is used as an I<sup>2</sup>C pin, the digital output P-ch transistor is always off</li> <li>+B input available</li> </ul>
F	 <p>The circuit diagram illustrates a CMOS level output stage, similar to Type E but with different current ratings. It features two parallel branches. The top branch contains a P-channel MOSFET (P-ch) with its drain connected to the digital output. The bottom branch contains an N-channel MOSFET (N-ch) with its drain also connected to the digital output. Both transistors are controlled by a common gate signal. A resistor labeled 'R' is connected between the drains of the P-ch and N-ch transistors. A digital input signal is connected to the gate of the N-ch transistor through an inverter. A 'Pull-up resistor control' signal is connected to the gate of the P-ch transistor. A 'Standby mode control' signal is connected to the gate of the N-ch transistor through another inverter.</p>	<ul style="list-style-type: none"> <li>CMOS level output</li> <li>CMOS level hysteresis input</li> <li>With pull-up resistor control</li> <li>With standby mode control</li> <li>Pull-up resistor : Approximately 50 kΩ</li> <li><math>I_{OH} = -12 \text{ mA}</math>, <math>I_{OL} = 12 \text{ mA}</math></li> <li>+B input available</li> </ul>

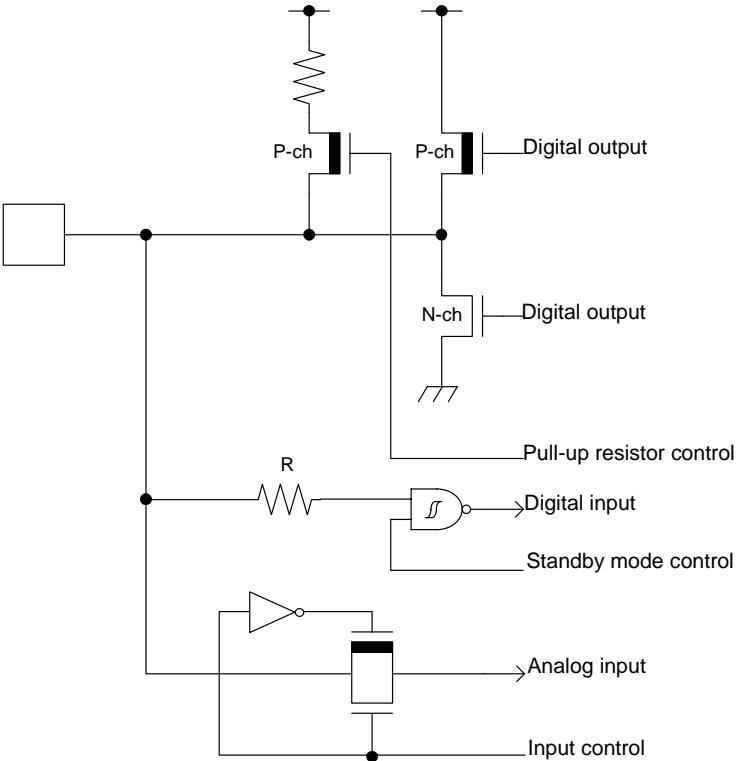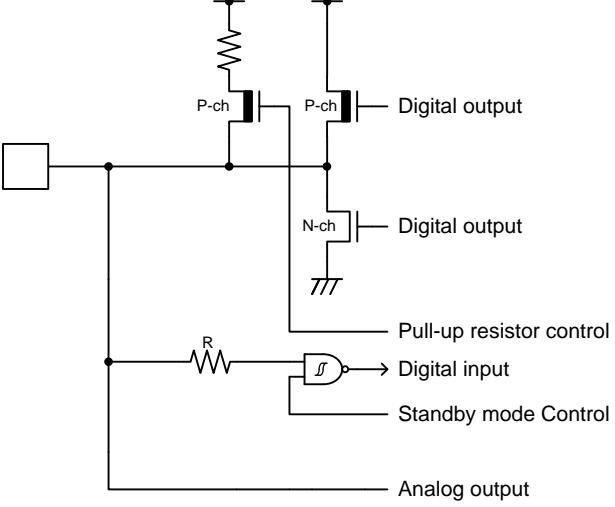Type	Circuit	Remarks
G	 <p>The circuit diagram for Type G shows a CMOS level output with hysteresis. It features two NMOS transistors (P-ch) connected to a common drain, with their gates controlled by a digital input through a resistor R and a NOT gate. The drains of these transistors are connected to the drains of two PMOS transistors (N-ch), which are also controlled by a digital input through a resistor R and a NOT gate. The sources of all four transistors are connected to ground. The outputs of the PMOS transistors are labeled "Digital output". Below the main output stage, there is a small feedback loop: the drain of one PMOS transistor is connected to the gate of the other PMOS transistor via a resistor R, and its source is connected to ground. This forms a hysteresis loop. The source of the second PMOS transistor is connected to the drain of the first PMOS transistor. The drain of the second PMOS transistor is connected to the digital output. The source of the second PMOS transistor is also connected to the gate of the first PMOS transistor via a resistor R. The drain of the first PMOS transistor is connected to the digital output. The source of the first PMOS transistor is connected to ground. The digital output is also connected to a standby mode control logic, which includes a NOT gate and a switch. The digital output is also connected to an analog input stage, which consists of a PMOS transistor and a diode. The analog input is also connected to the input control logic, which includes a NOT gate and a switch.</p> <ul style="list-style-type: none"> <li>• CMOS level output</li> <li>• CMOS level hysteresis input</li> <li>• With input control</li> <li>• Analog input</li> <li>• With pull-up resistor control</li> <li>• With standby mode control</li> <li>• Pull-up resistor : Approximately 50 kΩ</li> <li>• <math>I_{OH} = -4 \text{ mA}</math>, <math>I_{OL} = 4 \text{ mA}</math></li> <li>• When this pin is used as an I<sup>2</sup>C pin, the digital output P-ch transistor is always off</li> <li>• +B input available</li> </ul>	
H	 <p>The circuit diagram for Type H is similar to Type G, but it includes an additional "Analog output" terminal. The main output stage is identical to Type G. The digital output is connected to a standby mode control logic, which includes a NOT gate and a switch. The digital output is also connected to an analog output stage, which consists of a PMOS transistor and a diode. The analog output is also connected to the input control logic, which includes a NOT gate and a switch.</p> <ul style="list-style-type: none"> <li>• CMOS level output</li> <li>• CMOS level hysteresis input</li> <li>• With input control</li> <li>• Analog output</li> <li>• With pull-up resistor control</li> <li>• With standby mode control</li> <li>• Pull-up resistor : Approximately 50 kΩ</li> <li>• <math>I_{OH} = -4 \text{ mA}</math>, <math>I_{OL} = 4 \text{ mA}</math></li> </ul>	

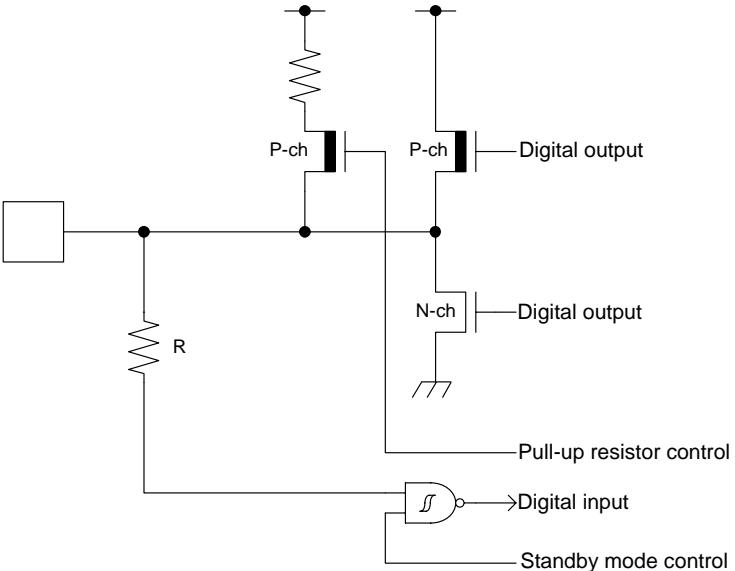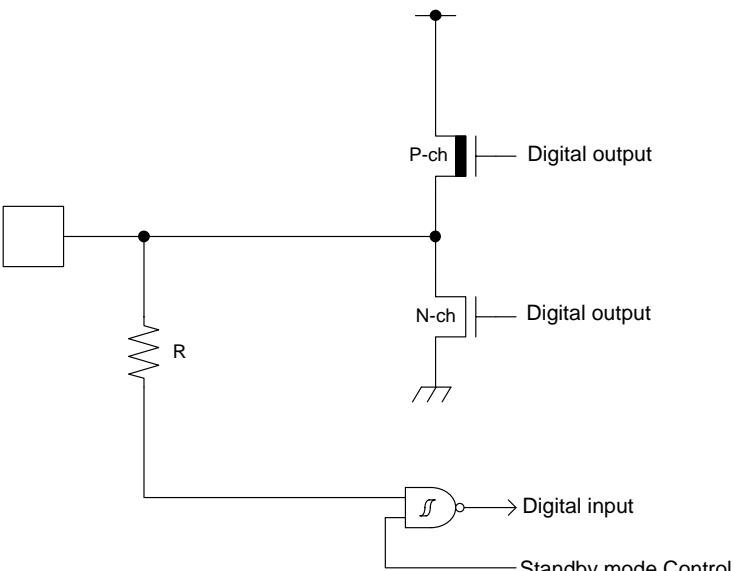Type	Circuit	Remarks
I	 <p>The circuit diagram for Type I shows a CMOS level output with hysteresis input. It features two P-channel transistors (P-ch) and one N-channel transistor (N-ch). A digital input signal controls the N-ch transistor. A pull-up resistor, labeled 'R', is connected between the output node and VDD. A standby mode control signal, through an inverter, enables or disables the P-ch transistors. A 'Pull-up resistor control' signal is also present.</p>	<ul style="list-style-type: none"> <li>CMOS level output</li> <li>CMOS level hysteresis input</li> <li>5V tolerant</li> <li>With pull-up resistor control</li> <li>With standby mode control</li> <li>Pull-up resistor : Approximately 50 kΩ</li> <li><math>I_{OH} = -4\text{mA}</math>, <math>I_{OL} = 4 \text{ mA}</math></li> <li>Available to control PZR registers.</li> <li>When this pin is used as an I<sup>2</sup>C pin, the digital output P-ch transistor is always off</li> </ul>
J	 <p>The circuit diagram for Type J shows a CMOS level hysteresis input. It consists of a resistor, an inverter, and a buffer stage, followed by a 'Mode input' terminal.</p>	CMOS level hysteresis input
K	 <p>The circuit diagram for Type K is similar to Type I but includes a higher current rating. It features two P-channel transistors (P-ch) and one N-channel transistor (N-ch). A digital input signal controls the N-ch transistor. A pull-up resistor, labeled 'R', is connected between the output node and VDD. A standby mode control signal, through an inverter, enables or disables the P-ch transistors. A 'Pull-up resistor control' signal is also present.</p>	<ul style="list-style-type: none"> <li>CMOS level output</li> <li>CMOS level hysteresis input</li> <li>With standby mode control</li> <li><math>I_{OH} = -18.0 \text{ mA}</math>, <math>I_{OL} = 16.5 \text{ mA}</math></li> </ul>

## 6. Handling Precautions

Any semiconductor devices have inherently a certain rate of failure. The possibility of failure is greatly affected by the conditions in which they are used (circuit conditions, environmental conditions, etc.). This page describes precautions that must be observed to minimize the chance of failure and to obtain higher reliability from your Cypress semiconductor devices.

### 6.1 Precautions for Product Design

This section describes precautions when designing electronic equipment using semiconductor devices.

#### Absolute Maximum Ratings

Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of certain established limits, called absolute maximum ratings. Do not exceed these ratings.

#### Recommended Operating Conditions

Recommended operating conditions are normal operating ranges for the semiconductor device. All the device's electrical characteristics are warranted when operated within these ranges.

Always use semiconductor devices within the recommended operating conditions. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their sales representative beforehand.

#### Processing and Protection of Pins

These precautions must be followed when handling the pins which connect semiconductor devices to power supply and input/output functions.

##### 1. Preventing Over-Voltage and Over-Current Conditions

Exposure to voltage or current levels in excess of maximum ratings at any pin is likely to cause deterioration within the device, and in extreme cases leads to permanent damage of the device. Try to prevent such overvoltage or over-current conditions at the design stage.

##### 2. Protection of Output Pins

Shorting of output pins to supply pins or other output pins, or connection to large capacitance can cause large current flows. Such conditions if present for extended periods of time can damage the device. Therefore, avoid this type of connection.

##### 3. Handling of Unused Input Pins

Unconnected input pins with very high impedance levels can adversely affect stability of operation. Such pins should be connected through an appropriate resistance to a power supply pin or ground pin.

#### Latch-up

Semiconductor devices are constructed by the formation of P-type and N-type areas on a substrate. When subjected to abnormally high voltages, internal parasitic PNPN junctions (called thyristor structures) may be formed, causing large current levels in excess of several hundred mA to flow continuously at the power supply pin. This condition is called latch-up.

CAUTION: The occurrence of latch-up not only causes loss of reliability in the semiconductor device, but can cause injury or damage from high heat, smoke or flame. To prevent this from happening, do the following:

1. Be sure that voltages applied to pins do not exceed the absolute maximum ratings. This should include attention to abnormal noise, surge levels, etc.
2. Be sure that abnormal current flows do not occur during the power-on sequence.

#### Observance of Safety Regulations and Standards

Most countries in the world have established standards and regulations regarding safety, protection from electromagnetic interference, etc. Customers are requested to observe applicable regulations and standards in the design of products.

#### Fail-Safe Design

Any semiconductor devices have inherently a certain rate of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

## Precautions Related to Usage of Devices

Cypress semiconductor devices are intended for use in standard applications (computers, office automation and other office equipment, industrial, communications, and measurement equipment, personal or household devices, etc.).

**CAUTION:** Customers considering the use of our products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage, or where extremely high levels of reliability are demanded (such as aerospace systems, atomic energy controls, sea floor repeaters, vehicle operating controls, medical devices for life support, etc.) are requested to consult with sales representatives before such use. The company will not be responsible for damages arising from such use without prior approval.

### 6.2 Precautions for Package Mounting

Package mounting may be either lead insertion type or surface mount type. In either case, for heat resistance during soldering, you should only mount under Cypress's recommended conditions. For detailed information about mount conditions, contact your sales representative.

#### Lead Insertion Type

Mounting of lead insertion type packages onto printed circuit boards may be done by two methods: direct soldering on the board, or mounting by using a socket.

Direct mounting onto boards normally involves processes for inserting leads into through-holes on the board and using the flow soldering (wave soldering) method of applying liquid solder. In this case, the soldering process usually causes leads to be subjected to thermal stress in excess of the absolute ratings for storage temperature. Mounting processes should conform to Cypress recommended mounting conditions.

If socket mounting is used, differences in surface treatment of the socket contacts and IC lead surfaces can lead to contact deterioration after long periods. For this reason it is recommended that the surface treatment of socket contacts and IC leads be verified before mounting.

#### Surface Mount Type

Surface mount packaging has longer and thinner leads than lead-insertion packaging, and therefore leads are more easily deformed or bent. The use of packages with higher pin counts and narrower pin pitch results in increased susceptibility to open connections caused by deformed pins, or shorting due to solder bridges.

You must use appropriate mounting techniques. Cypress recommends the solder reflow method, and has established a ranking of mounting conditions for each product. Users are advised to mount packages in accordance with Cypress ranking of recommended conditions.

#### Lead-Free Packaging

**CAUTION:** When ball grid array (BGA) packages with Sn-Ag-Cu balls are mounted using Sn-Pb eutectic soldering, junction strength may be reduced under some conditions of use.

#### Storage of Semiconductor Devices

Because plastic chip packages are formed from plastic resins, exposure to natural environmental conditions will cause absorption of moisture. During mounting, the application of heat to a package that has absorbed moisture can cause surfaces to peel, reducing moisture resistance and causing packages to crack. To prevent, do the following:

1. Avoid exposure to rapid temperature changes, which cause moisture to condense inside the product. Store products in locations where temperature changes are slight.
2. Use dry boxes for product storage. Products should be stored below 70% relative humidity, and at temperatures between 5°C and 30°C.  
When you open Dry Package that recommends humidity 40% to 70% relative humidity.
3. When necessary, Cypress packages semiconductor devices in highly moisture-resistant aluminum laminate bags, with a silica gel desiccant. Devices should be sealed in their aluminum laminate bags for storage.
4. Avoid storing packages where they are exposed to corrosive gases or high levels of dust.

#### Baking

Packages that have absorbed moisture may be de-moisturized by baking (heat drying). Follow the Cypress recommended conditions for baking.

Condition: 125°C/24 h

## **Static Electricity**

Because semiconductor devices are particularly susceptible to damage by static electricity, you must take the following precautions:

1. Maintain relative humidity in the working environment between 40% and 70%. Use of an apparatus for ion generation may be needed to remove electricity.
2. Electrically ground all conveyors, solder vessels, soldering irons and peripheral equipment.
3. Eliminate static body electricity by the use of rings or bracelets connected to ground through high resistance (on the level of 1 MΩ).  
Wearing of conductive clothing and shoes, use of conductive floor mats and other measures to minimize shock loads is recommended.
4. Ground all fixtures and instruments, or protect with anti-static measures.
5. Avoid the use of styrofoam or other highly static-prone materials for storage of completed board assemblies.

### **6.3 Precautions for Use Environment**

Reliability of semiconductor devices depends on ambient temperature and other conditions as described above.

For reliable performance, do the following:

1. Humidity  
Prolonged use in high humidity can lead to leakage in devices as well as printed circuit boards. If high humidity levels are anticipated, consider anti-humidity processing.
2. Discharge of Static Electricity  
When high-voltage charges exist close to semiconductor devices, discharges can cause abnormal operation. In such cases, use anti-static measures or processing to prevent discharges.
3. Corrosive Gases, Dust, or Oil  
Exposure to corrosive gases or contact with dust or oil may lead to chemical reactions that will adversely affect the device. If you use devices in such conditions, consider ways to prevent such exposure or to protect the devices.
4. Radiation, Including Cosmic Radiation  
Most devices are not designed for environments involving exposure to radiation or cosmic radiation. Users should provide shielding as appropriate.
5. Smoke, Flame  
CAUTION: Plastic molded devices are flammable, and therefore should not be used near combustible substances. If devices begin to smoke or burn, there is danger of the release of toxic gases.

Customers considering the use of Cypress products in other special environmental conditions should consult with sales representatives.

## 7. Handling Devices

### Power supply pins

In products with multiple VCC and VSS pins, respective pins at the same potential are interconnected within the device in order to prevent malfunctions such as latch-up. However, all of these pins should be connected externally to the power supply or ground lines in order to reduce electromagnetic emission levels, to prevent abnormal operation of strobe signals caused by the rise in the ground level, and to conform to the total output current rating.

Moreover, connect the current supply source with each Power supply pin and GND pin of this device at low impedance. It is also advisable that a ceramic capacitor of approximately 0.1  $\mu$ F be connected as a bypass capacitor between each Power supply pin and GND pin near this device.

### Stabilizing power supply voltage

A malfunction may occur when the power supply voltage fluctuates rapidly even though the fluctuation is within the recommended operating conditions of the VCC power supply voltage. As a rule, with voltage stabilization, suppress the voltage fluctuation so that the fluctuation in VCC ripple (peak-to-peak value) at the commercial frequency (50 Hz/60 Hz) does not exceed 10% of the VCC value in the recommended operating conditions, and the transient fluctuation rate does not exceed 0.1 V/ $\mu$ s when there is a momentary fluctuation on switching the power supply.

### Crystal oscillator circuit

Noise near the X0/X1 and X0A/X1A pins may cause the device to malfunction. Design the printed circuit board so that X0/X1, X0A/X1A pins, the crystal oscillator, and the bypass capacitor to ground are located as close to the device as possible.

It is strongly recommended that the PC board artwork be designed such that the X0/X1 and X0A/X1A pins are surrounded by ground plane as this is expected to produce stable operation.

Evaluate oscillation of your using crystal oscillator by your mount board.

### Sub crystal oscillator

This series sub oscillator circuit is low gain to keep the low current consumption. The crystal oscillator to fill the following conditions is recommended for sub crystal oscillator to stabilize the oscillation.

#### ■ Surface mount type

Size : More than 3.2mm  $\times$  1.5mm

Load capacitance : Approximately 6pF to 7pF

#### ■ Lead type


Load capacitance : Approximately 6pF to 7pF

### Using an external clock

When using an external clock as an input of the main clock, set X0/X1 to the external clock input, and input the clock to X0. X1(PE3) can be used as a general-purpose I/O port.

Similarly, when using an external clock as an input of the sub clock, set X0A/X1A to the external clock input, and input the clock to X0A. X1A (P47) can be used as a general-purpose I/O port.

#### Example of Using an External Clock

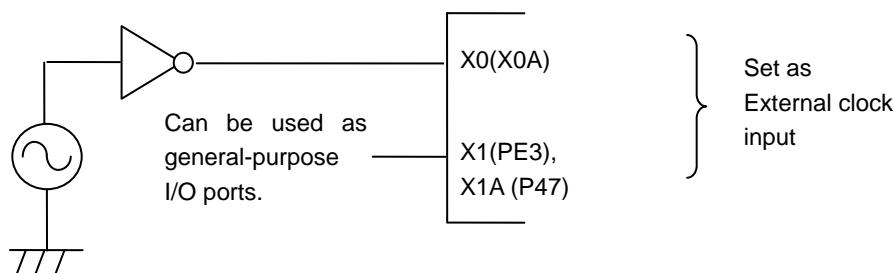


### Handling when using Multi-function serial pin as I<sup>2</sup>C pin

If it is using the multi-function serial pin as I<sup>2</sup>C pins, P-ch transistor of digital output is always disabled. However, I<sup>2</sup>C pins need to keep the electrical characteristic like other pins and not to connect to the external I<sup>2</sup>C bus system with power OFF.

### C Pin

This series contains the regulator. Be sure to connect a smoothing capacitor ( $C_s$ ) for the regulator between the C pin and the GND pin. Please use a ceramic capacitor or a capacitor of equivalent frequency characteristics as a smoothing capacitor. However, some laminated ceramic capacitors have the characteristics of capacitance variation due to thermal fluctuation (F characteristics and Y5V characteristics). Please select the capacitor that meets the specifications in the operating conditions to use by evaluating the temperature characteristics of a capacitor. A smoothing capacitor of about 4.7μF would be recommended for this series.

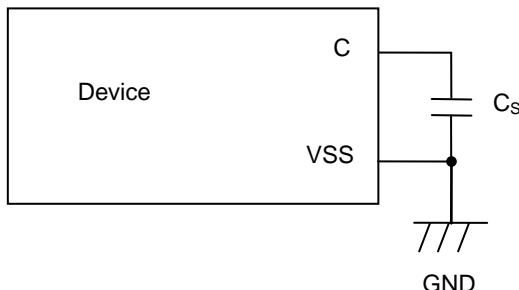

### Mode pins (MD0)

Connect the MD pin (MD0) directly to VCC or VSS pins. Design the printed circuit board such that the pull-up/down resistance stays low, as well as the distance between the mode pins and VCC pins or VSS pins is as short as possible and the connection impedance is low, when the pins are pulled-up/down such as for switching the pin level and rewriting the Flash memory data. It is because of preventing the device erroneously switching to test mode due to noise.

### Notes on power-on

Turn power on/off in the following order or at the same time.

If not using the A/D converter and D/A converter, connect AVCC = VCC and AVSS = VSS.

Turning on : VCC → AVCC → AVRH

Turning off : AVRH → AVCC → VCC

### Serial Communication

There is a possibility to receive wrong data due to the noise or other causes on the serial communication.

Therefore, design a printed circuit board so as to avoid noise.

Consider the case of receiving wrong data due to noise, perform error detection such as by applying a checksum of data at the end. If an error is detected, retransmit the data.

### Differences in features among the products with different memory sizes and between Flash memory products and MASK products

The electric characteristics including power consumption, ESD, latch-up, noise characteristics, and oscillation characteristics among the products with different memory sizes and between Flash memory products and MASK products are different because chip layout and memory structures are different.

If you are switching to use a different product of the same series, please make sure to evaluate the electric characteristics.


### Pull-Up function of 5V tolerant I/O

Please do not input the signal more than VCC voltage at the time of Pull-Up function use of 5V tolerant I/O.

### Adjoining wiring on circuit board

If wiring of the crystal oscillation circuit (X0/X1 and X0A/X1A) adjoins and also runs in parallel with the wiring of GPIO, there is a possibility that the oscillation erroneously counts because oscillation wave has noise with the change of GPIO. Keep as much distance as possible between both wirings and insert the ground pattern between them in order to avoid this possibility.

## 8. Block Diagram

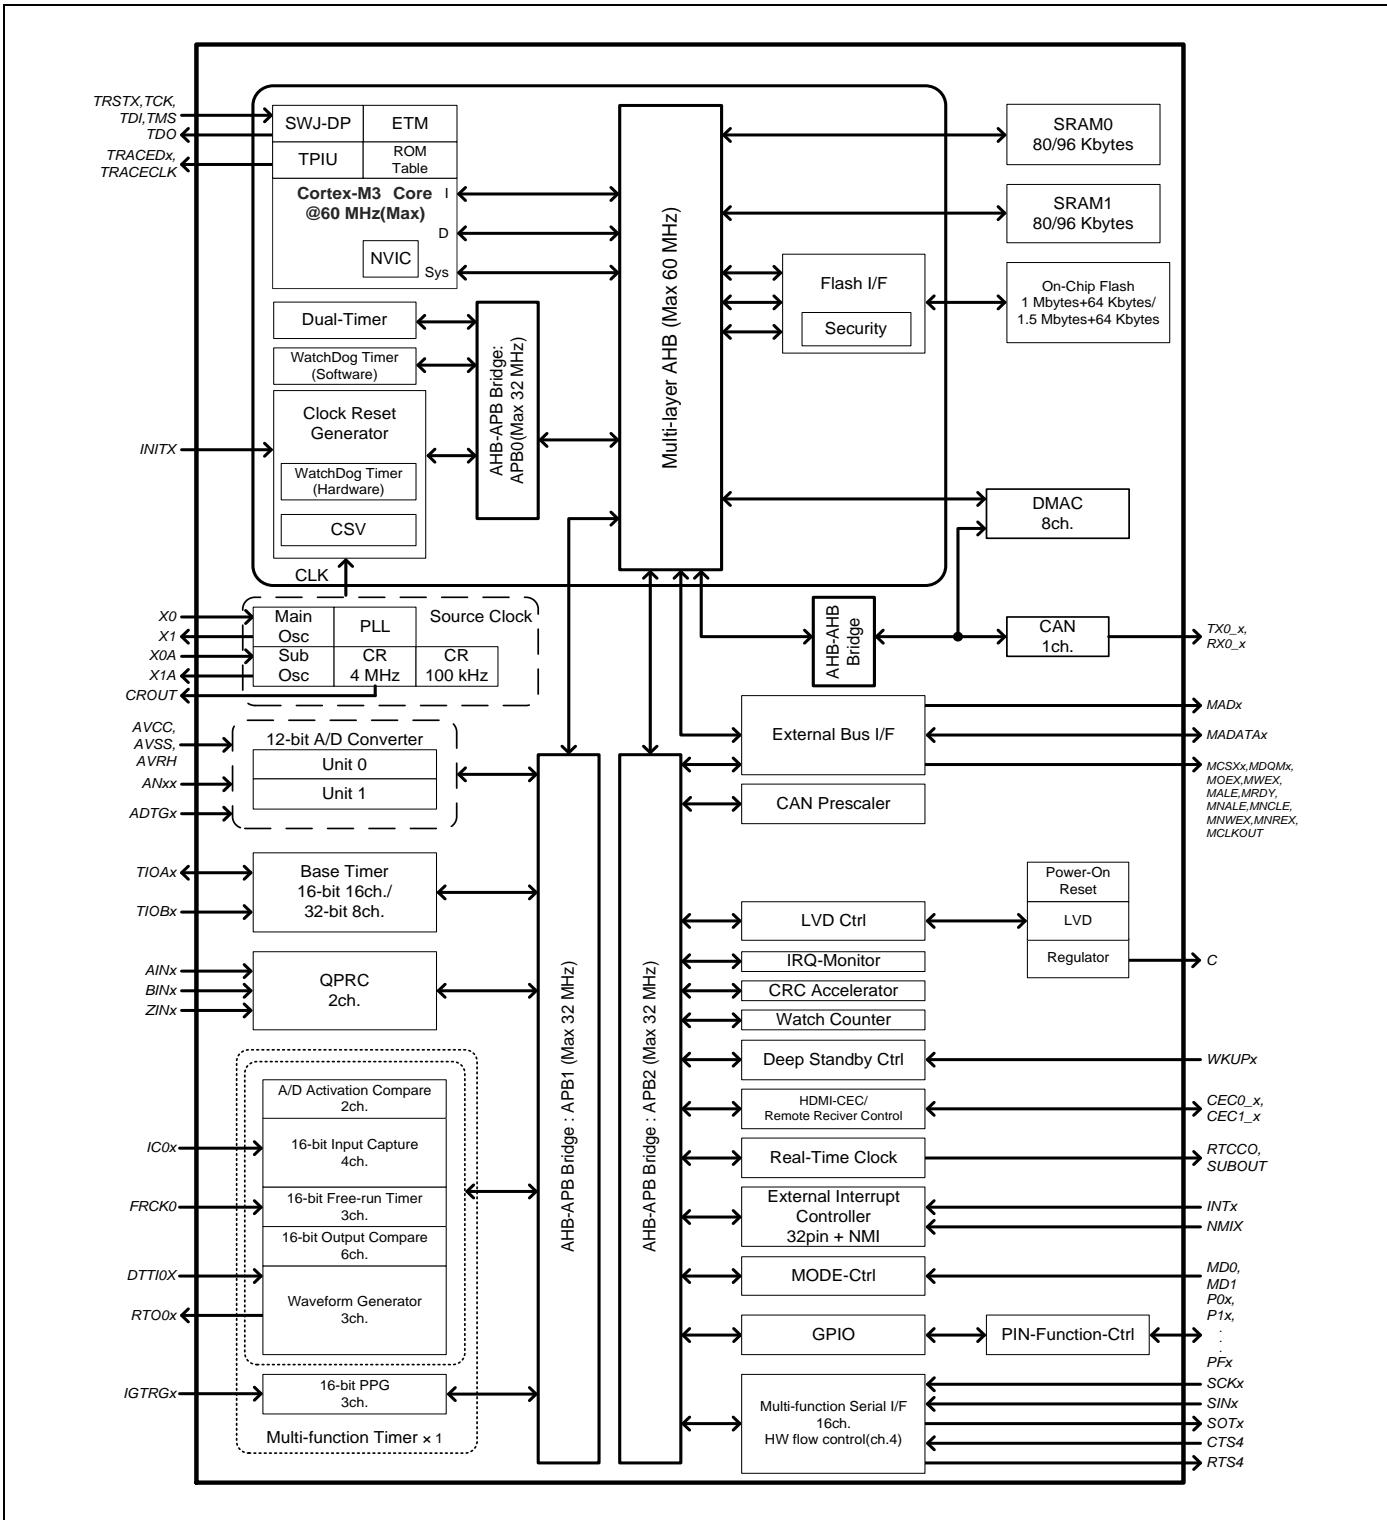



## 9. Memory Size

See "Memory size" in "1. Product Lineup" to confirm the memory size.

## 10. Memory Map

### Memory Map (1)

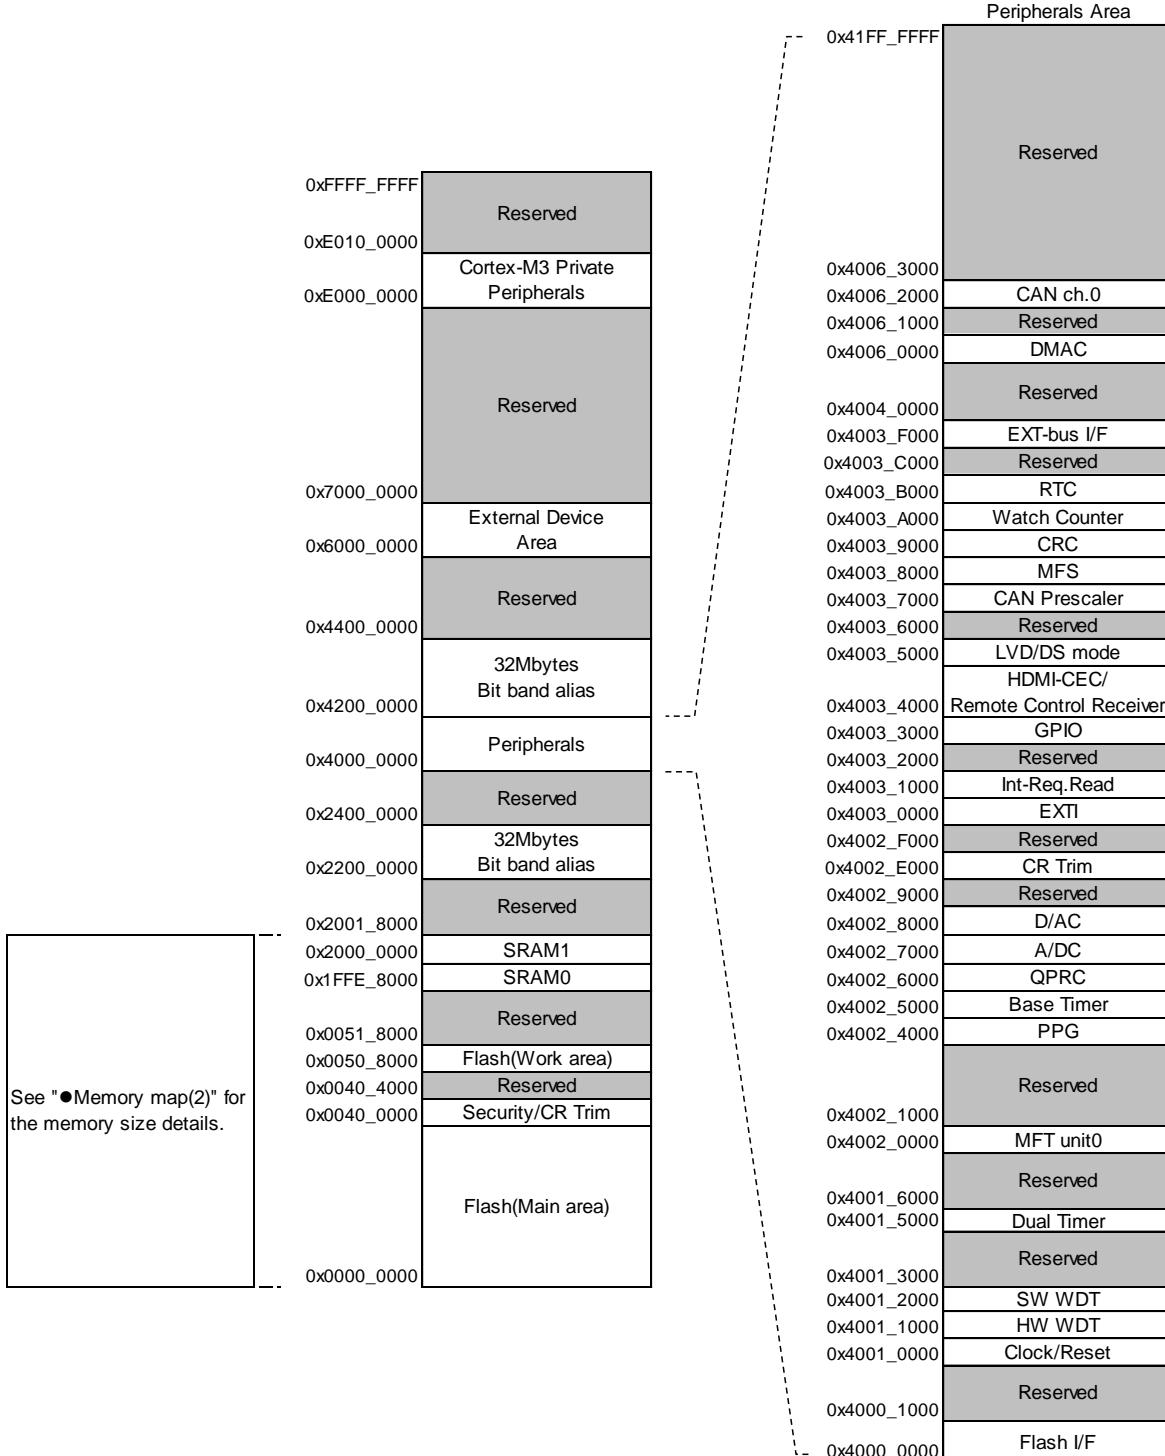

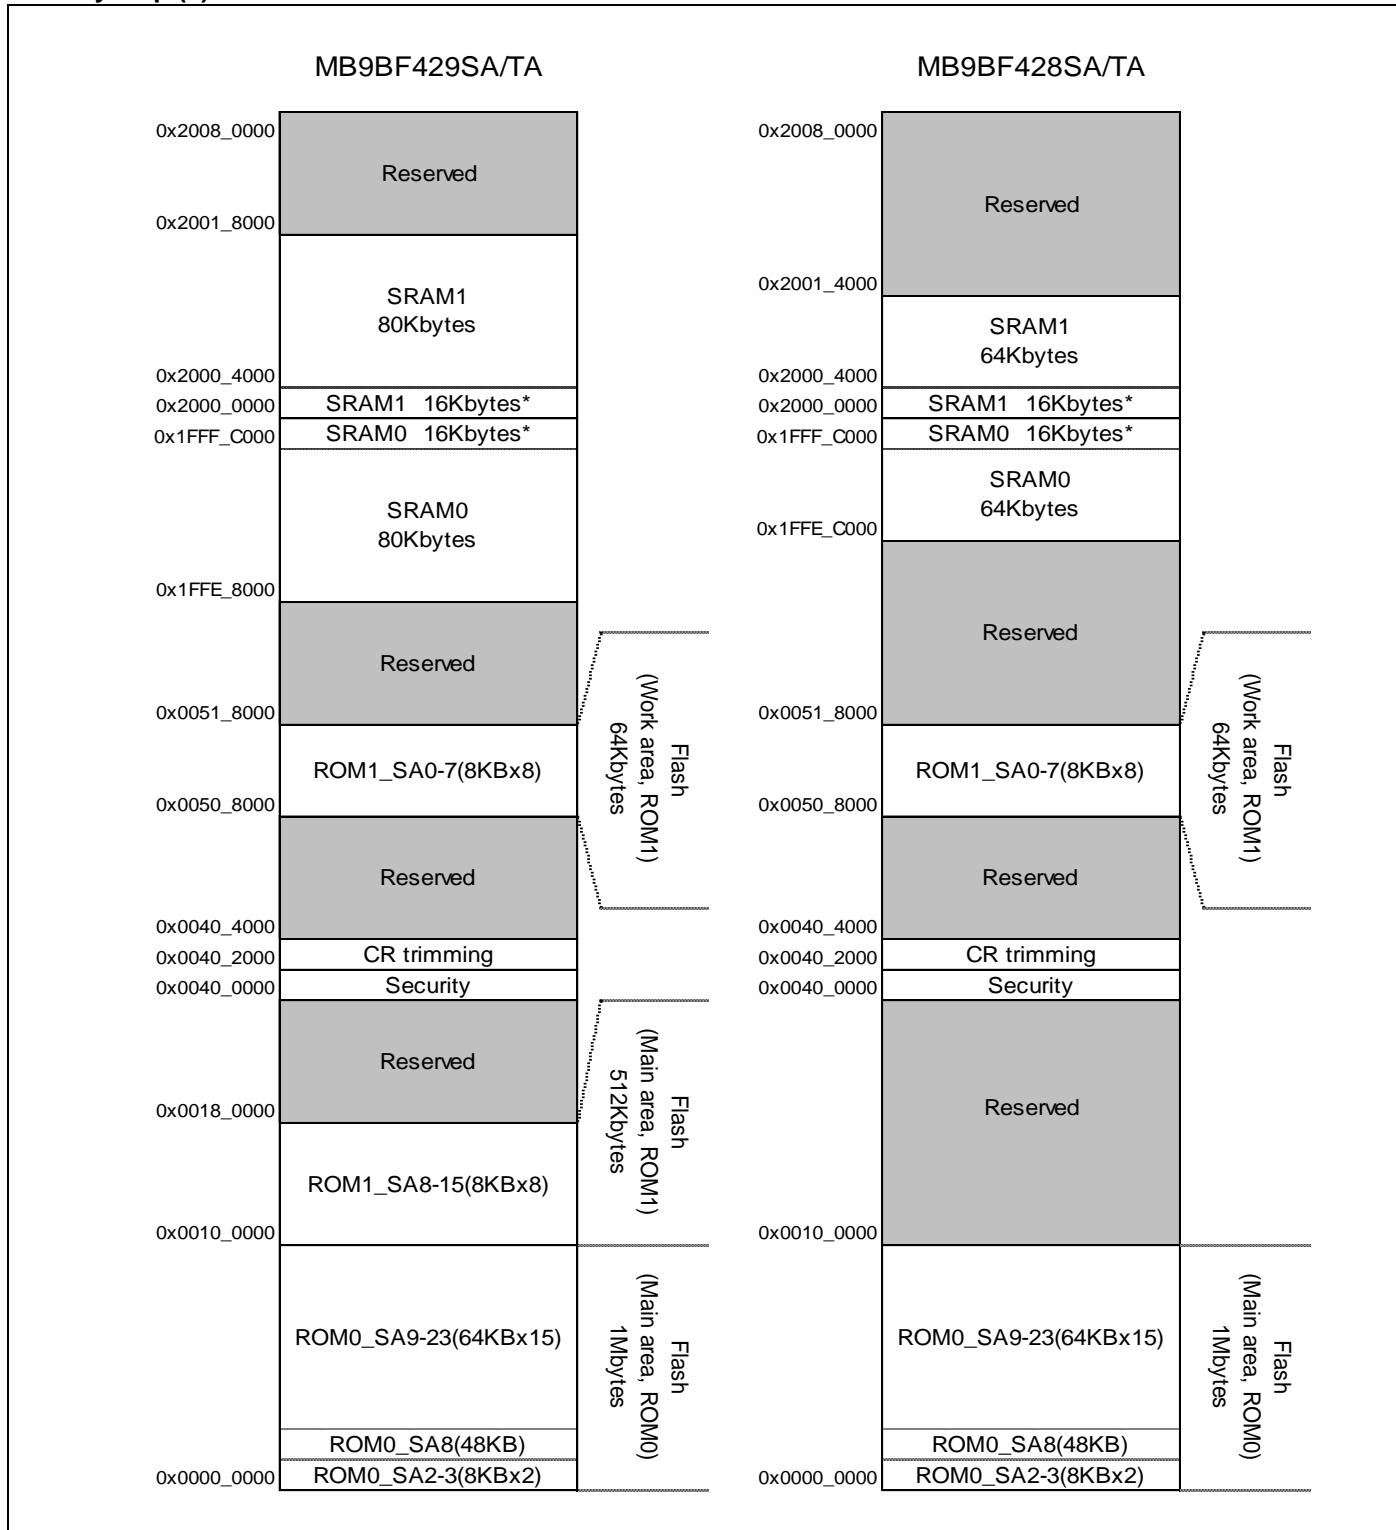**Memory Map (2)**


\*: The content of SRAM can be retained at the deep standby modes by the setting of Deep Standby RAM Retention Register (DSRAMR).

See "MB9B520T/420T/320T/120T Series Flash programming Manual" for sector structure of Flash.

**Peripheral Address Map**

Start address	End address	Bus	Peripherals
0x4000_0000	0x4000_0FFF	AHB	Flash Memory I/F register
0x4000_1000	0x4000_FFFF		Reserved
0x4001_0000	0x4001_0FFF	APB0	Clock/Reset Control
0x4001_1000	0x4001_1FFF		Hardware Watchdog timer
0x4001_2000	0x4001_2FFF		Software Watchdog timer
0x4001_3000	0x4001_4FFF		Reserved
0x4001_5000	0x4001_5FFF		Dual-Timer
0x4001_6000	0x4001_FFFF		Reserved
0x4002_0000	0x4002_0FFF	APB1	Multi-function timer unit0
0x4002_1000	0x4002_3FFF		Reserved
0x4002_4000	0x4002_4FFF		PPG
0x4002_5000	0x4002_5FFF		Base Timer
0x4002_6000	0x4002_6FFF		Quadrature Position/Revolution Counter (QPRC)
0x4002_7000	0x4002_7FFF		A/D Converter
0x4002_8000	0x4002_8FFF		D/A Converter
0x4002_9000	0x4002_DFFF		Reserved
0x4002_E000	0x4002_EFFF		Built-in CR trimming
0x4002_F000	0x4002_FFFF		Reserved
0x4003_0000	0x4003_0FFF	APB2	External Interrupt
0x4003_1000	0x4003_1FFF		Interrupt Source Check Register
0x4003_2000	0x4003_2FFF		Reserved
0x4003_3000	0x4003_3FFF		GPIO
0x4003_4000	0x4003_4FFF		HDMI-CEC/Remote control Reception
0x4003_5000	0x4003_57FF		Low-Voltage Detector
0x4003_5800	0x4003_5FFF		Deep standby mode Controller
0x4003_6000	0x4003_6FFF		Reserved
0x4003_7000	0x4003_7FFF		CAN prescaler
0x4003_8000	0x4003_8FFF		Multi-function serial Interface
0x4003_9000	0x4003_9FFF		CRC
0x4003_A000	0x4003_AFFF		Watch Counter
0x4003_B000	0x4003_BFFF		Real-time clock
0x4003_C000	0x4003_EFFF		Reserved
0x4003_F000	0x4003_FFFF		External bus interface
0x4004_0000	0x4005_FFFF	AHB	Reserved
0x4006_0000	0x4006_0FFF		DMAC register
0x4006_1000	0x4006_1FFF		Reserved
0x4006_2000	0x4006_2FFF		CAN ch.0
0x4006_3000	0x41FF_FFFF		Reserved

## 11. Pin Status in Each CPU State

The terms used for pin status have the following meanings.

■ INITX=0

This is the period when the INITX pin is the "L" level.

■ INITX=1

This is the period when the INITX pin is the "H" level.

■ SPL=0

This is the status that the standby pin level setting bit (SPL) in the standby mode control register (STB\_CTL) is set to "0".

■ SPL=1

This is the status that the standby pin level setting bit (SPL) in the standby mode control register (STB\_CTL) is set to "1".

■ Input enabled

Indicates that the input function can be used.

■ Internal input fixed at "0"

This is the status that the input function cannot be used. Internal input is fixed at "L".

■ Hi-Z

Indicates that the pin drive transistor is disabled and the pin is put in the Hi-Z state.

■ Setting disabled

Indicates that the setting is disabled.

■ Maintain previous state

Maintains the state that was immediately prior to entering the current mode.

If a built-in peripheral function is operating, the output follows the peripheral function.

If the pin is being used as a port, that output is maintained.

■ Analog input is enabled

Indicates that the analog input is enabled.

■ Trace output

Indicates that the trace function can be used.

■ GPIO selected

In Deep standby mode, pins switch to the general-purpose I/O port.

**List of Pin Status**

Pin status type	Function group	Power-on reset or low-voltage detection state	INITX input state	Device internal reset state	Run mode or SLEEP mode state	Timer mode, RTC mode, or STOP mode state		Deep standby RTC mode or Deep standby STOP mode state		Return from Deep standby mode state
		Power supply unstable	Power supply stable		Power supply stable	Power supply stable		Power supply stable		Power supply stable
		-	INITX = 0	INITX = 1	INITX = 1	INITX = 1		INITX = 1		INITX = 1
		-	-	-	-	SPL = 0	SPL = 1	SPL = 0	SPL = 1	-
A	GPIO selected	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	Hi-Z / Internal input fixed at "0"	GPIO selected	Hi-Z / Internal input fixed at "0"	GPIO selected
	Main crystal oscillator input pin/ External main clock input selected	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled
B	GPIO selected	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	Hi-Z / Internal input fixed at "0"	GPIO selected	Hi-Z / Internal input fixed at "0"	GPIO selected
	External main clock input selected	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	Hi-Z / Internal input fixed at "0"	Maintain previous state	Hi-Z / Internal input fixed at "0"	Maintain previous state
	Main crystal oscillator output pin	Hi-Z / Internal input fixed at "0"/ or Input enable	Hi-Z / Internal input fixed at "0"	Hi-Z / Internal input fixed at "0"	Maintain previous state/When oscillation stops* <sup>1</sup> , Hi-Z / Internal input fixed at "0"	Maintain previous state/When oscillation stops* <sup>1</sup> , Hi-Z / Internal input fixed at "0"	Maintain previous state/When oscillation stops* <sup>1</sup> , Hi-Z / Internal input fixed at "0"	Maintain previous state/When oscillation stops* <sup>1</sup> , Hi-Z / Internal input fixed at "0"	Maintain previous state/When oscillation stops* <sup>1</sup> , Hi-Z / Internal input fixed at "0"	Maintain previous state/When oscillation stops* <sup>1</sup> , Hi-Z / Internal input fixed at "0"
C	INITX input pin	Pull-up / Input enabled	Pull-up / Input enabled	Pull-up / Input enabled	Pull-up / Input enabled	Pull-up / Input enabled	Pull-up / Input enabled	Pull-up / Input enabled	Pull-up / Input enabled	Pull-up / Input enabled
D	Mode input pin	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled

Pin status type	Function group	Power-on reset or low-voltage detection state	INITX input state	Device internal reset state	Run mode or SLEEP mode state	Timer mode, RTC mode, or STOP mode state		Deep standby RTC mode or Deep standby STOP mode state		Return from Deep standby mode state
		Power supply unstable	Power supply stable		Power supply stable	Power supply stable		Power supply stable		Power supply stable
		-	INITX = 0	INITX = 1	INITX = 1	INITX = 1		INITX = 1		INITX = 1
		-	-	-	-	SPL = 0	SPL = 1	SPL = 0	SPL = 1	-
E	Mode input pin	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled
	GPIO selected	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	Hi-Z / Input enabled	GPIO selected	Hi-Z / Input enabled	GPIO selected
F	GPIO selected	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	Hi-Z / Internal input fixed at "0"	GPIO selected Internal input fixed at "0"	Hi-Z / Internal input fixed at "0"	GPIO selected
	Sub crystal oscillator input pin / External sub clock input selected	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled
G	GPIO selected	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	Hi-Z / Internal input fixed at "0"	GPIO selected Internal input fixed at "0"	Hi-Z / Internal input fixed at "0"	GPIO selected
	External sub clock input selected	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	Hi-Z / Internal input fixed at "0"	Maintain previous state	Hi-Z / Internal input fixed at "0"	Maintain previous state
	Sub crystal oscillator output pin	Hi-Z / Internal input fixed at "0" / or Input enable	Hi-Z / Internal input fixed at "0"	Hi-Z / Internal input fixed at "0"	Maintain previous state	Maintain previous state/When oscillation stops <sup>*2</sup> , Hi-Z / Internal input fixed at "0"	Maintain previous state/When oscillation stops <sup>*2</sup> , Hi-Z / Internal input fixed at "0"	Maintain previous state/When oscillation stops <sup>*2</sup> , Hi-Z / Internal input fixed at "0"	Maintain previous state/When oscillation stops <sup>*2</sup> , Hi-Z / Internal input fixed at "0"	Maintain previous state/When oscillation stops <sup>*2</sup> , Hi-Z / Internal input fixed at "0"

Pin status type	Function group	Power-on reset or low-voltage detection state	INITX input state	Device internal reset state	Run mode or SLEEP mode state	Timer mode, RTC mode, or STOP mode state	Deep standby RTC mode or Deep standby STOP mode state	Return from Deep standby mode state
		Power supply unstable	Power supply stable		Power supply stable	Power supply stable	Power supply stable	Power supply stable
		-	INITX = 0	INITX = 1	INITX = 1	INITX = 1		INITX = 1
		-	-	-	SPL = 0	SPL = 1	SPL = 0	SPL = 1
H	NMIX selected	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	WKUP input enabled	Hi-Z / WKUP input enabled
	GPIO selected	Hi-Z	Hi-Z / Input enabled	Hi-Z / Input enabled		Maintain previous state	Hi-Z / Internal input fixed at "0"	GPIO selected
I	JTAG selected	Hi-Z	Pull-up / Input enabled	Pull-up / Input enabled	Maintain previous state	Maintain previous state	Maintain previous state	Maintain previous state
	GPIO selected	Setting disabled	Setting disabled	Setting disabled		Maintain previous state	Hi-Z / Internal input fixed at "0"	Hi-Z / Internal input fixed at "0"
J	Resource selected	Hi-Z	Hi-Z / Input enabled	Hi-Z / Input enabled	Maintain previous state	Maintain previous state	Hi-Z / Internal input fixed at "0"	Hi-Z / Internal input fixed at "0"
	GPIO selected		Setting disabled	Setting disabled	GPIO selected Internal input fixed at "0"	GPIO selected		
K	External interrupt enabled selected	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	GPIO selected Internal input fixed at "0"	Hi-Z / Internal input fixed at "0"
	Resource other than above selected	Hi-Z	Hi-Z / Input enabled	Hi-Z / Input enabled		Maintain previous state	Hi-Z / Internal input fixed at "0"	
	GPIO selected		Setting disabled	Setting disabled				
L	Analog input selected	Hi-Z	Hi-Z / Internal input fixed at "0" / Analog input enabled	Hi-Z / Internal input fixed at "0" / Analog input enabled	Hi-Z / Internal input fixed at "0" / Analog input enabled	Hi-Z / Internal input fixed at "0" / Analog input enabled	Hi-Z / Internal input fixed at "0" / Analog input enabled	Hi-Z / Internal input fixed at "0" / Analog input enabled
	Resource other than above selected	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	GPIO selected Internal input fixed at "0"	Hi-Z / Internal input fixed at "0"
	GPIO selected		Setting disabled	Setting disabled	GPIO selected	GPIO selected		

Pin status type	Function group	Power-on reset or low-voltage detection state	INITX input state	Device internal reset state	Run mode or SLEEP mode state	Timer mode, RTC mode, or STOP mode state	Deep standby RTC mode or Deep standby STOP mode state	Return from Deep standby mode state
		Power supply unstable	Power supply stable		Power supply stable	Power supply stable	Power supply stable	Power supply stable
		-	INITX = 0	INITX = 1	INITX = 1	INITX = 1		INITX = 1
		-	-	-	SPL = 0	SPL = 1	SPL = 0	SPL = 1
M	Analog input selected	Hi-Z	Hi-Z / Internal input fixed at "0" / Analog input enabled	Hi-Z / Internal input fixed at "0" / Analog input enabled	Hi-Z / Internal input fixed at "0" / Analog input enabled	Hi-Z / Internal input fixed at "0" / Analog input enabled	Hi-Z / Internal input fixed at "0" / Analog input enabled	Hi-Z / Internal input fixed at "0" / Analog input enabled
	External interrupt enabled selected	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	GPIO selected	Hi-Z / Internal input fixed at "0"
	Resource other than above selected					Hi-Z / Internal input fixed at "0"		
	GPIO selected					GPIO selected	GPIO selected	

Pin status type	Function group	Power-on reset or low-voltage detection state	INITX input state	Device internal reset state	Run mode or SLEEP mode state	Timer mode, RTC mode, or STOP mode state	Deep standby RTC mode or Deep standby STOP mode state	Return from Deep standby mode state	
		Power supply unstable	Power supply stable		Power supply stable	Power supply stable	Power supply stable	Power supply stable	
		-	INITX = 0	INITX = 1	INITX = 1	INITX = 1		INITX = 1	
		-	-	-	-	SPL = 0	SPL = 1	SPL = 0	
N	Analog input selected	Hi-Z	Hi-Z / Internal input fixed at "0" / Analog input enabled	Hi-Z / Internal input fixed at "0" / Analog input enabled	Hi-Z / Internal input fixed at "0" / Analog input enabled	Hi-Z / Internal input fixed at "0" / Analog input enabled	Hi-Z / Internal input fixed at "0" / Analog input enabled	Hi-Z / Internal input fixed at "0" / Analog input enabled	
	WKUP enabled	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	WKUP input enabled	Hi-Z / WKUP input enabled	
	External interrupt enabled selected						GPIO selected Internal input fixed at "0"	Hi-Z / Internal input fixed at "0"	
	Resource other than above selected								
	GPIO selected					Hi-Z / Internal input fixed at "0"			
O	Analog output selected	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	*3	*4	GPIO selected Internal input fixed at "0"	
	Resource other than above selected	Hi-Z	Hi-Z / Input enabled	Hi-Z / Input enabled		Maintain previous state	Hi-Z / Internal input fixed at "0"		
	GPIO selected					Hi-Z / Internal input fixed at "0"			

Pin status type	Function group	Power-on reset or low-voltage detection state	INITX input state	Device internal reset state	Run mode or SLEEP mode state	Timer mode, RTC mode, or STOP mode state	Deep standby RTC mode or Deep standby STOP mode state	Return from Deep standby mode state	
		Power supply unstable	Power supply stable		Power supply stable	Power supply stable	Power supply stable	Power supply stable	
		-	INITX = 0	INITX = 1	INITX = 1	INITX = 1		INITX = 1	
		-	-	-	-	SPL = 0	SPL = 1	SPL = 0	
P	Trace selected	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Trace output	GPIO selected	Hi-Z / Internal input fixed at "0"	
	Resource other than above selected	Hi-Z	Hi-Z / Input enabled	Hi-Z / Input enabled		Maintain previous state			
	GPIO selected					Hi-Z / Internal input fixed at "0"			
Q	Trace selected	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Trace output	GPIO selected	Hi-Z / Internal input fixed at "0"	
	External interrupt enabled selected					Maintain previous state			
	Resource other than above selected					Hi-Z / Internal input fixed at "0"			
	GPIO selected								
R	CEC enabled	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	Maintain previous state	Maintain previous state	
	Resource other than above selected	Hi-Z	Hi-Z / Input enabled	Hi-Z / Input enabled		Maintain previous state	Hi-Z / Internal input fixed at "0"	GPIO selected	
	GPIO selected					Hi-Z / Internal input fixed at "0"	GPIO selected		
S	CEC enabled	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	Maintain previous state	Maintain previous state	
	External interrupt enabled selected					Maintain previous state	GPIO selected	Hi-Z / Internal input fixed at "0"	
	Resource other than above selected		Hi-Z	Hi-Z / Input enabled		Hi-Z / Internal input fixed at "0"			
	GPIO selected					Hi-Z / Internal input fixed at "0"	GPIO selected		

Pin status type	Function group	Power-on reset or low-voltage detection state	INITX input state	Device internal reset state	Run mode or SLEEP mode state	Timer mode, RTC mode, or STOP mode state	Deep standby RTC mode or Deep standby STOP mode state	Return from Deep standby mode state
		Power supply unstable	Power supply stable		Power supply stable	Power supply stable	Power supply stable	Power supply stable
		-	INITX = 0	INITX = 1	INITX = 1	INITX = 1		INITX = 1
		-	-	-	-	SPL = 0	SPL = 1	SPL = 0
T	CEC enabled	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	Maintain previous state	Maintain previous state
	WKUP enabled						WKUP input enabled	Hi-Z / WKUP input enabled
	External interrupt enabled selected						GPIO selected	Hi-Z / Internal input fixed at "0"
	Resource other than above selected							
	GPIO selected	Hi-Z	Hi-Z / Input enabled	Hi-Z / Input enabled		Hi-Z / Internal input fixed at "0"		
U	WKUP enabled	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	WKUP input enabled	Hi-Z / WKUP input enabled
	External interrupt enabled selected						GPIO selected	Hi-Z / Internal input fixed at "0"
	Resource other than above selected							
	GPIO selected	Hi-Z	Hi-Z / Input enabled	Hi-Z / Input enabled		Hi-Z / Internal input fixed at "0"		
V	GPIO selected	Hi-Z	Hi-Z / Input enabled	Hi-Z / Input enabled	Maintain previous state	Maintain previous state	GPIO selected	Hi-Z / Internal input fixed at "0"

\*1 : Oscillation is stopped at Sub timer mode, Low-speed CR timer mode, RTC mode, STOP mode, Deep standby RTC mode, and Deep standby STOP mode.

\*2 : Oscillation is stopped at STOP mode and Deep standby STOP mode.

\*3 : Maintain previous state at timer mode. GPIO selected Internal input fixed at "0" at RTC mode, STOP mode.

\*4 : Maintain previous state at timer mode. Hi-Z/Internal input fixed at "0" at RTC mode, STOP mode.

## 12. Electrical Characteristics

### 12.1 Absolute Maximum Ratings

Parameter	Symbol	Rating		Unit	Remarks
		Min	Max		
Power supply voltage <sup>*1, *2</sup>	V <sub>CC</sub>	V <sub>SS</sub> - 0.5	V <sub>SS</sub> + 6.5	V	
Analog power supply voltage <sup>*1, *3</sup>	A V <sub>CC</sub>	V <sub>SS</sub> - 0.5	V <sub>SS</sub> + 6.5	V	
Analog reference voltage <sup>*1, *3</sup>	AVRH	V <sub>SS</sub> - 0.5	V <sub>SS</sub> + 6.5	V	
Input voltage <sup>*1</sup>	V <sub>I</sub>	V <sub>SS</sub> - 0.5	V <sub>CC</sub> + 0.5 (≤ 6.5V)	V	
		V <sub>SS</sub> - 0.5	V <sub>SS</sub> + 6.5	V	5V tolerant
		V <sub>SS</sub> - 0.5	V <sub>SS</sub> + 3.63	V	5V tolerant <sup>*8</sup>
Analog pin input voltage <sup>*1</sup>	V <sub>IA</sub>	V <sub>SS</sub> - 0.5	A V <sub>CC</sub> + 0.5 (≤ 6.5V)	V	
Output voltage <sup>*1</sup>	V <sub>O</sub>	V <sub>SS</sub> - 0.5	V <sub>CC</sub> + 0.5 (≤ 6.5V)	V	
Clamp maximum current	I <sub>CLAMP</sub>	-2	+2	mA	<sup>*8</sup>
Clamp total maximum current	Σ[I <sub>CLAMP</sub> ]		+20	mA	<sup>*8</sup>
"L" level maximum output current <sup>*4</sup>	I <sub>OL</sub>	-	10	mA	4mA type
			20	mA	12mA type
			39	mA	P80/P81
"L" level average output current <sup>*5</sup>	I <sub>OLAV</sub>	-	4	mA	4mA type
			12	mA	12mA type
			16.5	mA	P80/P81
"L" level total maximum output current	ΣI <sub>OL</sub>	-	100	mA	
"L" level total average output current <sup>*6</sup>	ΣI <sub>OLAV</sub>	-	50	mA	
"H" level maximum output current <sup>*4</sup>	I <sub>OH</sub>	-	- 10	mA	4mA type
			- 20	mA	12mA type
			- 39	mA	P80/P81
"H" level average output current <sup>*5</sup>	I <sub>OHAV</sub>	-	- 4	mA	4mA type
			- 12	mA	12mA type
			- 18	mA	P80/P81
"H" level total maximum output current	ΣI <sub>OH</sub>	-	- 100	mA	
"H" level total average output current <sup>*6</sup>	ΣI <sub>OHAV</sub>	-	- 50	mA	
Power consumption	P <sub>D</sub>	-	390	mW	
Storage temperature	T <sub>STG</sub>	- 55	+ 150	°C	

\*1 : These parameters are based on the condition that V<sub>SS</sub> = AV<sub>SS</sub> = 0V.

\*2 : V<sub>CC</sub> must not drop below V<sub>SS</sub> - 0.5V.

\*3 : Ensure that the voltage does not exceed V<sub>CC</sub> + 0.5 V, for example, when the power is turned on.

\*4 : The maximum output current is defined as the value of the peak current flowing through any one of the corresponding pins.


\*5 : The average output current is defined as the average current value flowing through any one of the corresponding pins for a 100 ms period.

\*6 : The total average output current is defined as the average current value flowing through all of corresponding pins for a 100ms.

\*7 : V<sub>CC</sub> = A V<sub>CC</sub> = AVRH = V<sub>SS</sub> = AV<sub>SS</sub> = AVRL = 0.0V

\*8 :

- See "4. List of Pin Functions" and "5. I/O Circuit Type" about +B input available pin.
- Use within recommended operating conditions.
- Use at DC voltage (current) the +B input.
- The +B signal should always be applied a limiting resistance placed between the +B signal and the device.
- The value of the limiting resistance should be set so that when the +B signal is applied the input current to the device pin does not exceed rated values, either instantaneously or for prolonged periods.
- Note that when the device drive current is low, such as in the low-power consumption modes, the +B input potential may pass through the protective diode and increase the potential at the VCC and AVCC pin, and this may affect other devices.
- Note that if a +B signal is input when the device power supply is off (not fixed at 0V), the power supply is provided from the pins, so that incomplete operation may result.
- The following is a recommended circuit example (I/O equivalent circuit).

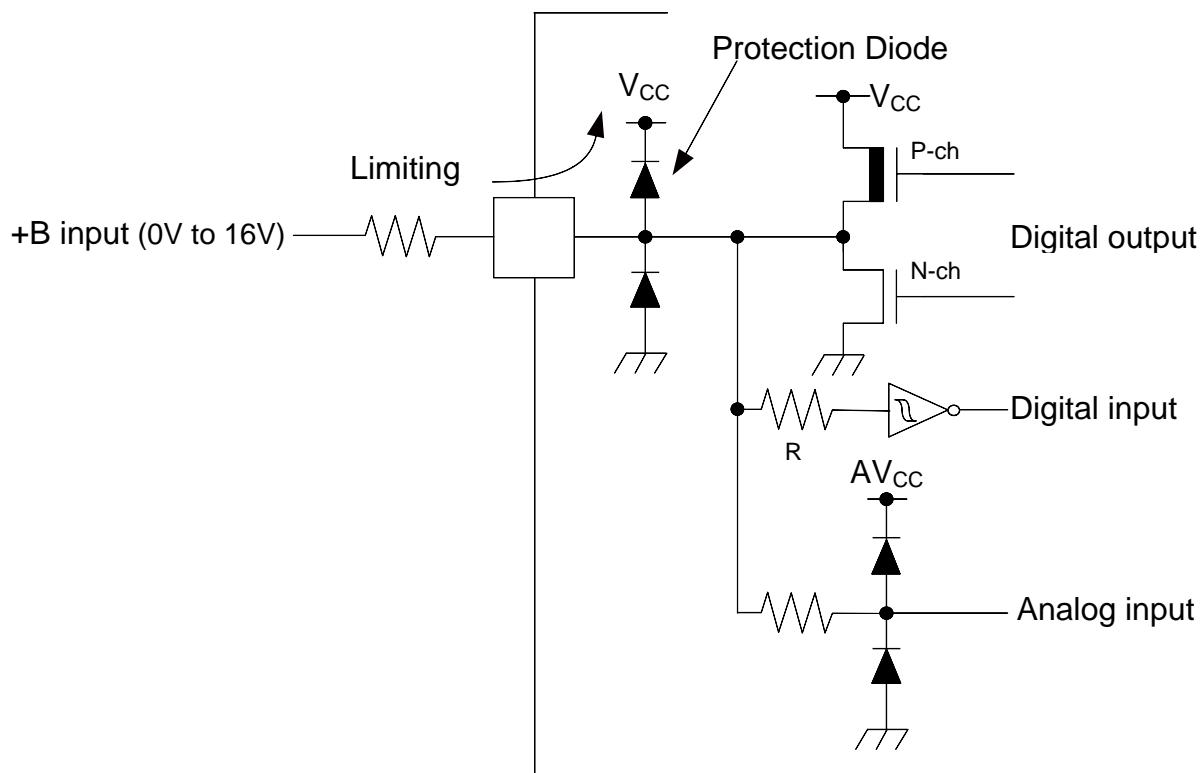

#### WARNING:

Semiconductor devices may be permanently damaged by application of stress (including, without limitation, voltage, current or temperature) in excess of absolute maximum ratings.

Do not exceed any of these ratings.

## 12.2 Recommended Operating Conditions

( $V_{SS} = AV_{SS} = 0.0V$ )

Parameter	Symbol	Conditions	Value		Unit	Remarks
			Min	Max		
Power supply voltage	$V_{CC}$	-	2.7 <sup>*2</sup>	5.5	V	
Analog power supply voltage	$AV_{CC}$	-	2.7	5.5	V	$AV_{CC} = V_{CC}$
Analog reference voltage	$AV_{RH}$	-	2.7	$AV_{CC}$	V	
	$AV_{RL}$	-	$AV_{SS}$	$AV_{SS}$	V	
Smoothing capacitor	$C_s$	-	1	10	$\mu F$	For built-in Regulator <sup>*1</sup>
Operating temperature	$T_a$	-	-40	+105	$^{\circ}C$	

\*1 : See "C Pin" in "7. Handling Devices" for the connection of the smoothing capacitor.

\*2 : In between less than the minimum power supply voltage and low voltage reset/interrupt detection voltage or more, instruction execution and low voltage detection function by built-in High-speed CR(including Main PLL is used) or built-in Low-speed CR is possible to operate only.

### WARNING:

The recommended operating conditions are required in order to ensure the normal operation of the semiconductor device. All of the device's electrical characteristics are warranted when the device is operated under these conditions.

Any use of semiconductor devices will be under their recommended operating condition.

Operation under any conditions other than these conditions may adversely affect reliability of device and could result in device failure.

No warranty is made with respect to any use, operating conditions or combinations not represented on this data sheet. If you are considering application under any conditions other than listed herein, please contact sales representatives beforehand.

## 12.3 DC Characteristics

### 12.3.1 Current Rating

Parameter	Symbol (Pin name)	Conditions	Value		Unit	Remarks
			Typ <sup>*1</sup>	Max <sup>*2</sup>		
Power supply current	I <sub>CC</sub>	PLL RUN mode	CPU : 60MHz, Peripheral : 30MHz <sup>*3 *5</sup> ,	29	37	mA
			CPU:60MHz, Peripheral clock stops <sup>*3 *5</sup> ,	19	26	mA
		High-speed CR RUN mode	CPU/ Peripheral : 4MHz <sup>*4</sup> <sup>*3</sup>	3.1	6.4	mA
		Sub RUN mode	CPU/ Peripheral : 32kHz <sup>*3 *6</sup> ,	170	2300	µA
		Low-speed CR RUN mode	CPU/ Peripheral : 100kHz <sup>*3</sup>	210	2300	µA
	I <sub>CCS</sub>	PLL SLEEP mode	Peripheral : 30MHz <sup>*3 *5</sup> ,	19	26	mA
		High-speed CR SLEEP mode	Peripheral : 4MHz <sup>*4</sup> <sup>*3</sup>	2.1	5.1	mA
		Sub SLEEP mode	Peripheral : 32kHz <sup>*3 *6</sup> ,	160	2200	µA
		Low-speed CR SLEEP mode	Peripheral : 100kHz <sup>*3</sup>	190	2200	µA
	I <sub>CCH</sub>	STOP mode	Ta = + 25°C <sup>*3</sup>	20	75	µA
			Ta = + 105°C <sup>*3</sup>	-	1.3	mA
	I <sub>CCT</sub>	Main TIMER mode	Ta = + 25°C <sup>*3 *6</sup> ,	2.8	5.5	mA
			Ta = + 105°C <sup>*3 *6</sup> ,	-	6.5	mA
		Sub TIMER mode	Ta = + 25°C <sup>*3 *6</sup> ,	24	95	µA
			Ta = + 105°C <sup>*3 *6</sup> ,	-	1.7	mA
	I <sub>CCR</sub>	RTC mode	Ta = + 25°C <sup>*3 *6</sup> ,	21	89	µA
			Ta = + 105°C <sup>*3 *6</sup> ,	-	1.7	mA

\*1 : Ta = +25°C, V<sub>CC</sub> = 3.3V

\*2 : Ta = +105°C, V<sub>CC</sub> = 5.5V

\*3 : When all ports are fixed.

\*4 : When setting it to 4MHz by trimming.

\*5 : When using the crystal oscillator of 4 MHz(Including the current consumption of the oscillation circuit)

\*6 : When using the crystal oscillator of 32 kHz(Including the current consumption of the oscillation circuit)

Parameter	Symbol (Pin name)	Conditions	Value		Unit	Remarks
			Typ <sup>*1</sup>	Max <sup>*2</sup>		
Power supply current	I <sub>CCHD</sub>	Deep Standby STOP mode	Ta = + 25°C, When RAM is off <sup>*3</sup>	1.9	13	µA
			Ta = + 25°C, When RAM is on(16KB) <sup>*4</sup> <sup>*3</sup>	4.8	17	µA
			Ta = + 25°C, When RAM is on(32KB) <sup>*4</sup> <sup>*3</sup>	5.5	20	µA
			Ta = + 105°C, When RAM is off <sup>*3</sup>	-	300	µA
			Ta = + 105°C, When RAM is on(16KB) <sup>*4</sup> <sup>*3</sup>		320	µA
			Ta = + 105°C, When RAM is on(32KB) <sup>*4</sup> <sup>*3</sup>		330	µA
	I <sub>CCRD</sub>	Deep Standby RTC mode	Ta = + 25°C, When RAM is off <sup>*3 *5</sup> , ,	2.5	14	µA
			Ta = + 25°C, When RAM is on(16KB) <sup>*4</sup> <sup>*3 *5</sup> , ,	5.4	18	µA
			Ta = + 25°C, When RAM is on(32KB) <sup>*4</sup> <sup>*3 *5</sup> , ,	6.1	21	µA
			Ta = + 105°C, When RAM is off <sup>*3 *5</sup> , ,	-	305	µA
			Ta = + 105°C, When RAM is on(16KB) <sup>*4</sup> <sup>*3 *5</sup> , ,		325	µA
			Ta = + 105°C, When RAM is on(32KB) <sup>*4</sup> <sup>*3 *5</sup> , ,		335	µA

\*1 : V<sub>CC</sub> = 3.3V

\*2 : V<sub>CC</sub> = 5.5V

\*3 : When all ports are fixed and LVD off.

\*4 : For more information about RAM retention area, see "Memory Map (2)" in "10. Memory Map".

\*5 : When using the crystal oscillator of 32 kHz(Including the current consumption of the oscillation circuit)

### Low-Voltage Detection Current

( $V_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol (Pin name)	Conditions	Value			Unit	Remarks
			Min	Typ	Max		
Low-Voltage detection circuit (LVD) power supply current	$I_{CCLOVD}$ (VCC)	At operation	-	0.13	0.3	$\mu A$	For occurrence of reset
			-	0.13	0.3	$\mu A$	For occurrence of interrupt

### Flash Memory Current

( $V_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol	Pin name	Conditions	Value			Unit	Remarks
				Min	Typ	Max		
Flash memory write/erase current	$I_{CCFLASH}$ (VCC)	VCC	At ROM0 Write/Erase	-	9.9	11.8	mA	*1
			At ROM1 Write/Erase	-	9.5	11.2	mA	*1

\*1 : When programming or erase in flash memory, Flash Memory Write/Erase current (ICCFLASH) is added to the Power supply current ( $I_{CC}$ ).

In addition, When programming or erase in flash memory ROM0 and ROM1 at the same time, Flash Memory Write/Erase current (ICCFLASH) of both ROM0 and ROM1 are added to the Power supply current ( $I_{CC}$ ).

### A/D Converter Current

( $V_{CC} = AV_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = AV_{SS} = AV_{RL} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol	Pin name	Conditions	Value			Unit	Remarks
				Min	Typ	Max		
Power supply current	$I_{CCAD}$ (VCC)	AVCC	At 1unit operation	-	0.69	0.9	mA	
			At stop	-	0.6	35	$\mu A$	
Reference power supply current (AVRH)	$I_{CCAVRH}$ (VCC)	AVRH	At 1unit operation AVRH=5.5V	-	1.1	1.97	mA	
			At stop	-	0.2	3.4	$\mu A$	

### D/A Converter Current

( $V_{CC} = AV_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = AV_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol	Pin name	Conditions	Value			Unit	Remarks
				Min	Typ	Max		
Power supply current*	$IDDA^{*2}$ (VCC)	AVCC	At 1unit operation $AV_{CC}=3.3V$	250	315	380	$\mu A$	
			At 1unit operation $AV_{CC}=5.0V$	380	475	580	$\mu A$	
			At stop	-	-	30	$\mu A$	

\*1 : No-load

\*2 : Generates the max current by the CODE about 0x200

**12.3.2 Pin Characteristics**
 $(V_{CC} = AV_{CC} = 2.7V \text{ to } 5.5V, V_{SS} = AV_{SS} = AVR_{L} = 0V, Ta = -40^{\circ}\text{C} \text{ to } +105^{\circ}\text{C})$ 

Parameter	Symbol	Pin name	Conditions	Value			Unit	Remarks
				Min	Typ	Max		
"H" level input voltage (hysteresis input)	$V_{IHS}$	CMOS hysteresis input pin, MD0, MD1	-	$V_{CC} \times 0.8$	-	$V_{CC} + 0.3$	V	
		5V tolerant input pin	-	$V_{CC} \times 0.8$	-	$V_{SS} + 5.5$	V	
"L" level input voltage (hysteresis input)	$V_{ILS}$	CMOS hysteresis input pin, MD0, MD1	-	$V_{SS} - 0.3$	-	$V_{CC} \times 0.2$	V	
		5V tolerant input pin	-	$V_{SS} - 0.3$	-	$V_{CC} \times 0.2$	V	
"H" level output voltage	$V_{OH}$	4mA type	$V_{CC} \geq 4.5\text{ V}, I_{OH} = -4\text{mA}$	$V_{CC} - 0.5$	-	$V_{CC}$	V	
			$V_{CC} < 4.5\text{ V}, I_{OH} = -2\text{mA}$					
		12mA type	$V_{CC} \geq 4.5\text{ V}, I_{OH} = -12\text{mA}$	$V_{CC} - 0.5$	-	$V_{CC}$	V	
			$V_{CC} < 4.5\text{ V}, I_{OH} = -8\text{mA}$					
		P80/P81	$V_{CC} \geq 4.5\text{ V}, I_{OH} = -18.0\text{ mA}$	$V_{CC} - 0.4$	-	$V_{CC}$	V	
			$V_{CC} < 4.5\text{ V}, I_{OH} = -12.0\text{ mA}$					
"L" level output voltage	$V_{OL}$	4mA type	$V_{CC} \geq 4.5\text{ V}, I_{OL} = 4\text{mA}$	$V_{SS}$	-	0.4	V	
			$V_{CC} < 4.5\text{ V}, I_{OL} = 2\text{mA}$					
		12mA type	$V_{CC} \geq 4.5\text{ V}, I_{OL} = 12\text{mA}$	$V_{SS}$	-	0.4	V	
			$V_{CC} < 4.5\text{ V}, I_{OL} = 8\text{mA}$					
		P80/P81	$V_{CC} \geq 4.5\text{ V}, I_{OL} = 16.5\text{mA}$	$V_{SS}$	-	0.4	V	
			$V_{CC} < 4.5\text{ V}, I_{OL} = 10.5\text{mA}$					
Input leak current	$I_{IL}$	-	-	-5	-	+5	$\mu\text{A}$	
		CEC0_0, CEC0_1, CEC1_0, CEC1_1	$V_{CC} = AV_{CC} = AVR_{H} = V_{SS} = AV_{SS} = AVR_{L} = 0.0V$	-	-	+1.8	$\mu\text{A}$	
Pull-up resistance value	$R_{PU}$	Pull-up pin	$V_{CC} \geq 4.5\text{ V}$	33	50	90	$\text{k}\Omega$	
			$V_{CC} < 4.5\text{ V}$	-	-	180		
Input capacitance	$C_{IN}$	Other than VCC, VSS, AVCC, AVSS, AVR <sub>H</sub> , AVR <sub>L</sub>	-	-	5	15	pF	

## 12.4 AC Characteristics


### 12.4.1 Main Clock Input Characteristics

( $V_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol	Pin name	Conditions	Value		Unit	Remarks
				Min	Max		
Input frequency	$F_{CH}$	X0, X1	$V_{CC} \geq 4.5V$	4	48	MHz	When crystal oscillator is connected
			$V_{CC} < 4.5V$	4	20		
			-	4	48	MHz	When using external clock
Input clock cycle	$t_{CYLH}$		-	20.83	250	ns	When using external clock
Input clock pulse width	-		PWH/tCYLH, PWL/tCYLH	45	55	%	When using external clock
Input clock rising time and falling time	$t_{CF}, t_{CR}$		-	-	5	ns	When using external clock
Internal operating clock* <sup>1</sup> frequency	$F_{CM}$	-	-	-	60	MHz	Master clock
	$F_{CC}$	-	-	-	60	MHz	Base clock (HCLK/FCLK)
	$F_{CP0}$	-	-	-	32	MHz	APB0 bus clock* <sup>2</sup>
	$F_{CP1}$	-	-	-	32	MHz	APB1 bus clock* <sup>2</sup>
	$F_{CP2}$	-	-	-	32	MHz	APB2 bus clock* <sup>2</sup>
Internal operating clock* <sup>1</sup> cycle time	$t_{CYCC}$	-	-	16.7	-	ns	Base clock (HCLK/FCLK)
	$t_{CYCP0}$	-	-	31.25	-	ns	APB0 bus clock* <sup>2</sup>
	$t_{CYCP1}$	-	-	31.25	-	ns	APB1 bus clock* <sup>2</sup>
	$t_{CYCP2}$	-	-	31.25	-	ns	APB2 bus clock* <sup>2</sup>

\*1 : For more information about each internal operating clock, see "Chapter 2-1: Clock" in "FM3 Family Peripheral Manual".

\*2 : For about each APB bus which each peripheral is connected to, see "8. Block Diagram" in this data sheet.

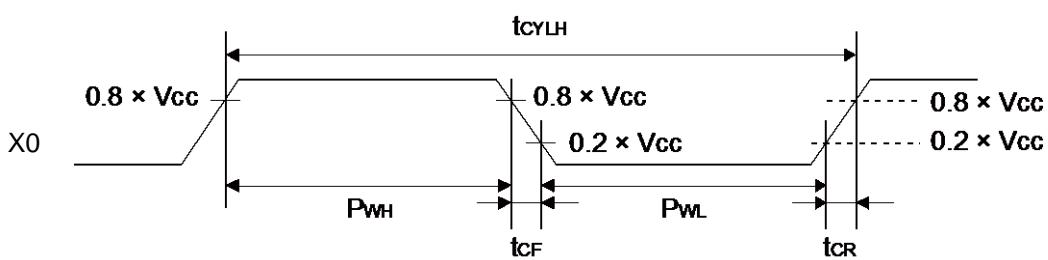


#### 12.4.2 Sub Clock Input Characteristics

( $V_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol	Pin name	Conditions	Value			Unit	Remarks
				Min	Typ	Max		
Input frequency	$1/t_{CYLL}$	X0A, X1A	-	-	32.768	-	kHz	When crystal oscillator is connected*
Input clock cycle			-	32	-	100	kHz	When using external clock
Input clock pulse width			-	10	-	31.25	μs	When using external clock

\* : For more information about crystal oscillator, see "Sub crystal oscillator" in "7. Handling Devices".

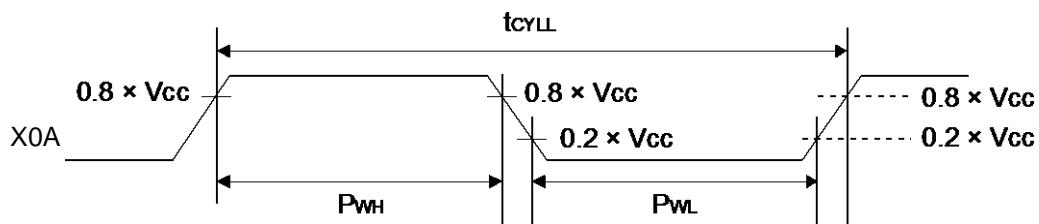

#### 12.4.3 Built-in CR Oscillation Characteristics

##### Built-in High-speed CR

( $V_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol	Conditions	Value			Unit	Remarks
			Min	Typ	Max		
Clock frequency	$F_{CRH}$	$T_a = +25^{\circ}C$ , $3.6V < V_{CC} \leq 5.5V$	3.92	4	4.08	MHz	When trimming* <sup>1</sup>
		$T_a = 0^{\circ}C$ to $+85^{\circ}C$ , $3.6V < V_{CC} \leq 5.5V$	3.9	4	4.1		
		$T_a = -40^{\circ}C$ to $+105^{\circ}C$ , $3.6V < V_{CC} \leq 5.5V$	3.88	4	4.12		
		$T_a = +25^{\circ}C$ , $2.7V \leq V_{CC} \leq 3.6V$	3.94	4	4.06		
		$T_a = -20^{\circ}C$ to $+85^{\circ}C$ , $2.7V \leq V_{CC} \leq 3.6V$	3.92	4	4.08		
		$T_a = -20^{\circ}C$ to $+105^{\circ}C$ , $2.7V \leq V_{CC} \leq 3.6V$	3.9	4	4.1		
		$T_a = -40^{\circ}C$ to $+105^{\circ}C$ , $2.7V \leq V_{CC} \leq 3.6V$	3.88	4	4.12		
		$T_a = -40^{\circ}C$ to $+105^{\circ}C$	2.8	4	5.2		When not trimming
Frequency stability time	$t_{CRWT}$	-	-	-	30	μs	* <sup>2</sup>

\*1 : In the case of using the values in CR trimming area of Flash memory at shipment for frequency/temperature trimming.

\*2 : Frequency stable time is time to stable of the frequency of the High-speed CR.

Clock after the trim value is set. After setting the trim value, the period when the frequency stability

Time passes can use the High-speed CR clock as a source clock.

##### Built-in Low-speed CR

( $V_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol	Conditions	Value			Unit	Remarks
			Min	Typ	Max		
Clock frequency	$F_{CRL}$	-	50	100	150	kHz	

#### 12.4.4 Operating Conditions of Main PLL (In the case of using main clock for input of PLL)

( $V_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol	Value			Unit	Remarks
		Min	Typ	Max		
PLL oscillation stabilization wait time* <sup>1</sup> (LOCK UP time)	$t_{LOCK}$	100	-	-	μs	
PLL input clock frequency	$F_{PLL}$	4	-	16	MHz	
PLL multiplication rate	-	5	-	37	multiplier	
PLL macro oscillation clock frequency	$F_{PLLO}$	75	-	150	MHz	
Main PLL clock frequency* <sup>2</sup>	$F_{CLKPLL}$	-	-	60	MHz	

\*1 : Time from when the PLL starts operating until the oscillation stabilizes.

\*2 : For more information about Main PLL clock (CLKPLL), see "Chapter 2-1: Clock" in "FM3 Family Peripheral Manual".

#### 12.4.5 Operating Conditions of Main PLL (In the case of using built-in high-speed CR for input clock of main PLL)

( $V_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )


Parameter	Symbol	Value			Unit	Remarks
		Min	Typ	Max		
PLL oscillation stabilization wait time* <sup>1</sup> (LOCK UP time)	$t_{LOCK}$	100	-	-	μs	
PLL input clock frequency	$F_{PLL}$	3.8	4	4.2	MHz	
PLL multiplication rate	-	19	-	35	multiplier	
PLL macro oscillation clock frequency	$F_{PLLO}$	72	-	150	MHz	
Main PLL clock frequency* <sup>2</sup>	$F_{CLKPLL}$	-	-	60	MHz	

\*1 : Time from when the PLL starts operating until the oscillation stabilizes.

\*2 : For more information about Main PLL clock (CLKPLL), see "Chapter 2-1: Clock" in "FM3 Family Peripheral Manual".

**Note:** Make sure to input to the main PLL source clock, the high-speed CR clock (CLKHC) that the frequency/temperature has been trimmed.

#### Main PLL connection

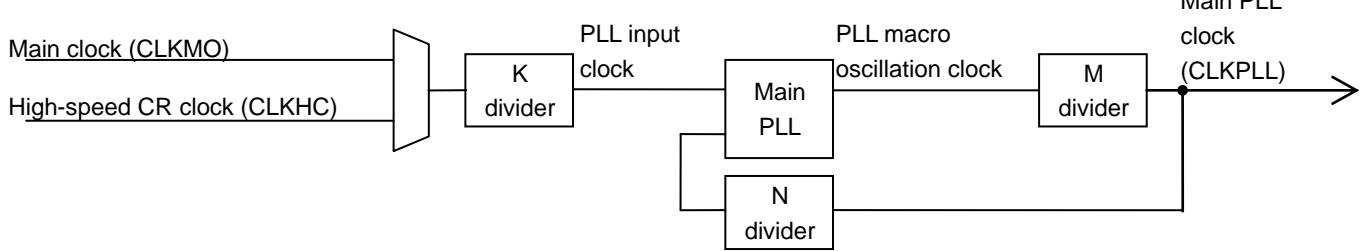

#### 12.4.6 Reset Input Characteristics


( $V_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol	Pin name	Conditions	Value		Unit	Remarks
				Min	Max		
Reset input time	$t_{INITX}$	INITX	-	500	-	ns	

#### 12.4.7 Power-on Reset Timing

( $V_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol	Pin name	Value		Unit	Remarks
			Min	Max		
Power supply rising time	$Tr$	VCC	0	-	ms	
Power supply shut down time	$Toff$		1	-	ms	
Time until releasing Power-on reset	$Tprt$		1.34	18.6	ms	

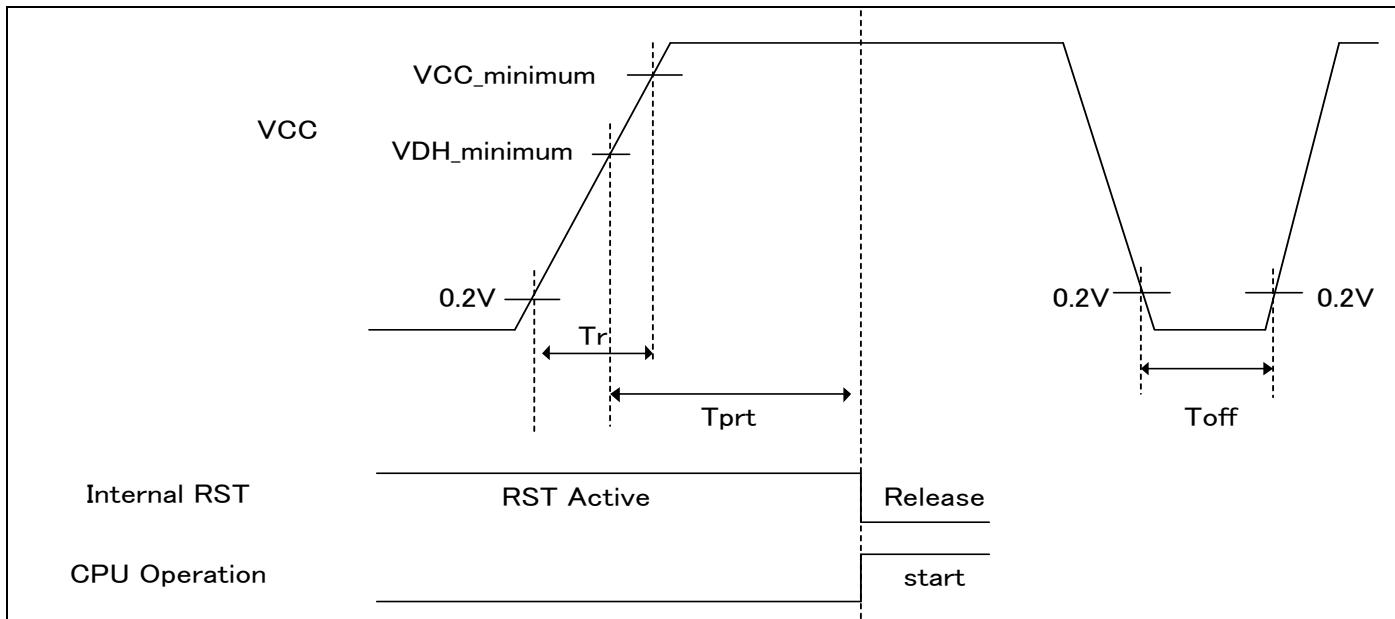

##### Glossary

- VCC\_minimum : Minimum  $V_{CC}$  of recommended operating conditions  
 VDH\_minimum : Minimum release voltage (when SVHR=00000) of Low-Voltage detection reset.  
 See "12.7. Low-Voltage Detection Characteristics"

#### 12.4.8 External Bus Timing


##### External bus clock output characteristics

( $V_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol	Pin name	Conditions	Value		Unit
				Min	Max	
Output frequency	$t_{CYCLE}$	MCLKOUT*	$V_{CC} \geq 4.5V$	-	50	MHz
			$V_{CC} < 4.5V$	-	32	MHz

\* : The external bus clock (MCLKOUT) is a divided clock of HCLK.


For more information about setting of clock divider, see "Chapter 12: External Bus Interface" in "FM3 Family Peripheral Manual". When external bus clock is not output, this characteristics does not give any effect on external bus operation.

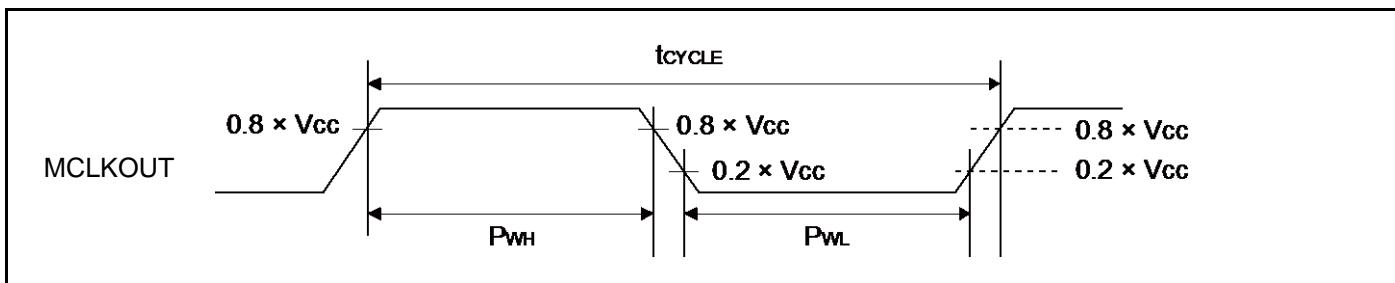

##### External bus signal input/output characteristics

( $V_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )


Parameter	Symbol	Conditions	Value	Unit	Remarks
Signal input characteristics	$V_{IH}$	-	$0.8 \times V_{CC}$	V	
	$V_{IL}$		$0.2 \times V_{CC}$	V	
Signal output characteristics	$V_{OH}$	-	$0.8 \times V_{CC}$	V	
	$V_{OL}$		$0.2 \times V_{CC}$	V	

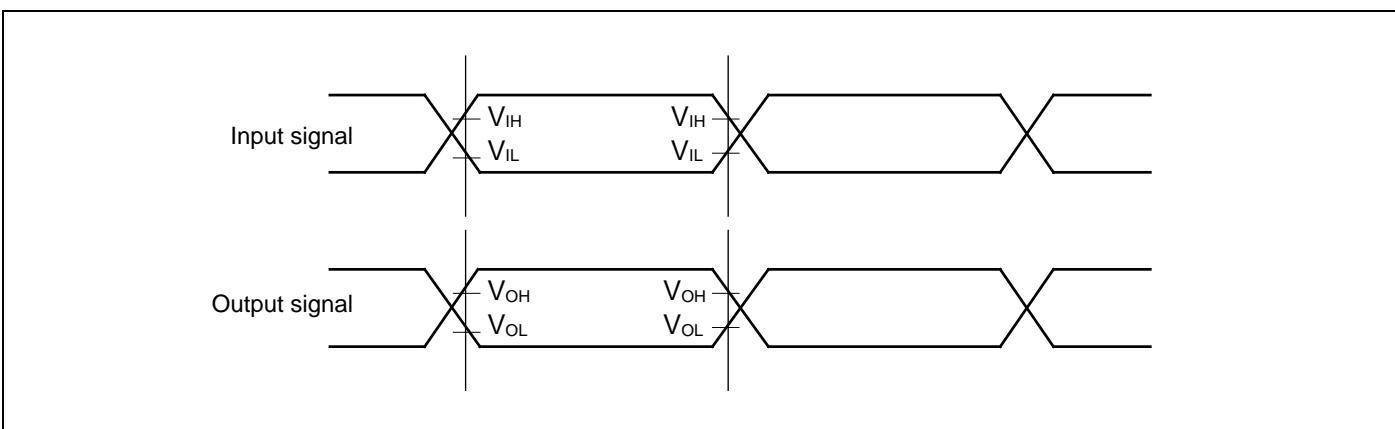

**Separate Bus Access Asynchronous SRAM Mode**
 $(V_{CC} = 2.7V \text{ to } 5.5V, V_{SS} = 0V, Ta = -40^{\circ}\text{C} \text{ to } +105^{\circ}\text{C})$ 

<b>Parameter</b>	<b>Symbol</b>	<b>Pin name</b>	<b>Conditions</b>	<b>Value</b>		<b>Unit</b>
				<b>Min</b>	<b>Max</b>	
MOEX Min pulse width	$t_{OEW}$	MOEX	$V_{CC} \geq 4.5V$	MCLKxn-3	-	ns
			$V_{CC} < 4.5V$			
MCSX $\downarrow \rightarrow$ Address output delay time	$t_{CSL-AV}$	MCSX[7:0], MAD[24:0]	$V_{CC} \geq 4.5V$	-9	+9	ns
			$V_{CC} < 4.5V$	-12	+12	
MOEX $\uparrow \rightarrow$ Address hold time	$t_{OEH-AX}$	MOEX, MAD[24:0]	$V_{CC} \geq 4.5V$	0	MCLKxm+9	ns
			$V_{CC} < 4.5V$		MCLKxm+12	
MCSX $\downarrow \rightarrow$ MOEX $\downarrow$ delay time	$t_{CSL-OEL}$	MOEX, MCSX[7:0]	$V_{CC} \geq 4.5V$	MCLKxm-9	MCLKxm+9	ns
			$V_{CC} < 4.5V$	MCLKxm-12	MCLKxm+12	
MOEX $\uparrow \rightarrow$ MCSX $\uparrow$ time	$t_{OEH-CSH}$	MCSX[7:0]	$V_{CC} \geq 4.5V$	0	MCLKxm+9	ns
			$V_{CC} < 4.5V$		MCLKxm+12	
MCSX $\downarrow \rightarrow$ MDQM $\downarrow$ delay time	$t_{CSL-RDQML}$	MCSX, MDQM[1:0]	$V_{CC} \geq 4.5V$	MCLKxm-9	MCLKxm+9	ns
			$V_{CC} < 4.5V$	MCLKxm-12	MCLKxm+12	
Data set up $\rightarrow$ MOEX $\uparrow$ time	$t_{DS-OE}$	MOEX, MADATA[15:0]	$V_{CC} \geq 4.5V$	20	-	ns
			$V_{CC} < 4.5V$	38	-	
MOEX $\uparrow \rightarrow$ Data hold time	$t_{DH-OE}$	MOEX, MADATA[15:0]	$V_{CC} \geq 4.5V$	0	-	ns
			$V_{CC} < 4.5V$		-	
MWEX Min pulse width	$t_{WEW}$	MWEX	$V_{CC} \geq 4.5V$	MCLKxn-3	-	ns
			$V_{CC} < 4.5V$		-	
MWEX $\uparrow \rightarrow$ Address output delay time	$t_{WEH-AX}$	MWEX, MAD[24:0]	$V_{CC} \geq 4.5V$	0	MCLKxm+9	ns
			$V_{CC} < 4.5V$		MCLKxm+12	
MCSX $\downarrow \rightarrow$ MWEX $\downarrow$ delay time	$t_{CSL-WEL}$	MWEX, MCSX[7:0]	$V_{CC} \geq 4.5V$	MCLKxn-9	MCLKxn+9	ns
			$V_{CC} < 4.5V$	MCLKxn-12	MCLKxn+12	
MWEX $\uparrow \rightarrow$ MCSX $\uparrow$ delay time	$t_{WEH-CSH}$	MCSX[7:0]	$V_{CC} \geq 4.5V$	0	MCLKxm+9	ns
			$V_{CC} < 4.5V$		MCLKxm+12	
MCSX $\downarrow \rightarrow$ MDQM $\downarrow$ delay time	$t_{CSL-WDQML}$	MCSX, MDQM[1:0]	$V_{CC} \geq 4.5V$	MCLKxn-9	MCLKxn+9	ns
			$V_{CC} < 4.5V$	MCLKxn-12	MCLKxn+12	
MCSX $\downarrow \rightarrow$ Data output time	$t_{CSL-DV}$	MCSX, MADATA[15:0]	$V_{CC} \geq 4.5V$	MCLK-9	MCLK+9	ns
			$V_{CC} < 4.5V$	MCLK-12	MCLK+12	
MWEX $\uparrow \rightarrow$ Data hold time	$t_{WEH-DX}$	MWEX, MADATA[15:0]	$V_{CC} \geq 4.5V$	0	MCLKxm+12	ns
			$V_{CC} < 4.5V$		-	


**Note:** When the external load capacitance  $C_L = 30 \text{ pF}$  ( $m = 0 \text{ to } 15, n = 1 \text{ to } 16$ ).

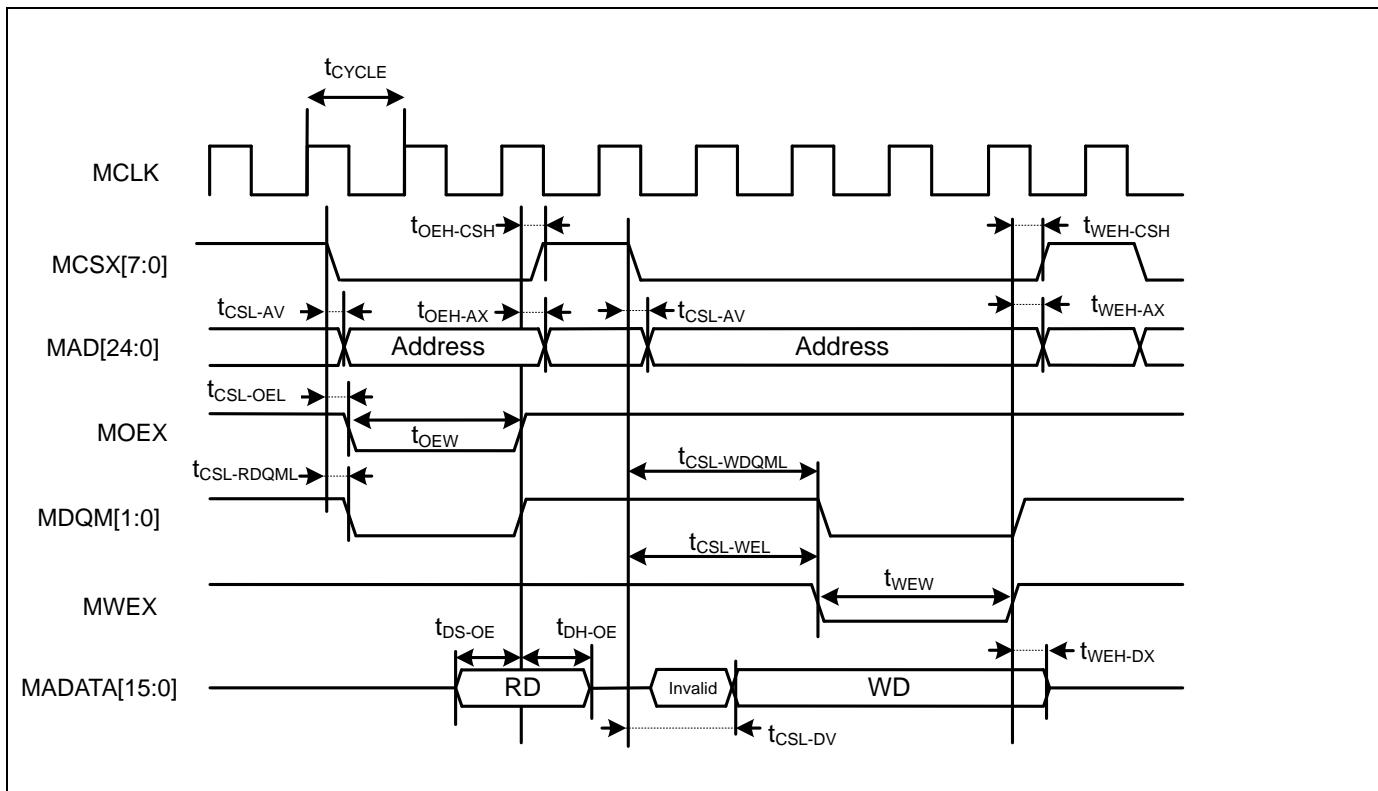

**Separate Bus Access Synchronous SRAM Mode**
 $(V_{CC} = 2.7V \text{ to } 5.5V, V_{SS} = 0V, Ta = -40^{\circ}\text{C} \text{ to } +105^{\circ}\text{C})$ 

Parameter	Symbol	Pin name	Conditions	Value		Unit
				Min	Max	
Address delay time	$t_{AV}$	MCLK, MAD[24:0]	$V_{CC} \geq 4.5V$	1	12	ns
			$V_{CC} < 4.5V$			
MCSX delay time	$t_{CSL}$	MCLK, MCSX[7:0]	$V_{CC} \geq 4.5V$	1	9	ns
			$V_{CC} < 4.5V$			
MOEX delay time	$t_{REH}$	MCLK, MOEX	$V_{CC} \geq 4.5V$	1	9	ns
			$V_{CC} < 4.5V$			
Data set up → MCLK ↑ time	$t_{DS}$	MCLK, MADATA[15:0]	$V_{CC} \geq 4.5V$	19	-	ns
			$V_{CC} < 4.5V$			
MCLK ↑ → Data hold time	$t_{DH}$	MCLK, MADATA[15:0]	$V_{CC} \geq 4.5V$	0	-	ns
			$V_{CC} < 4.5V$			
MWEX delay time	$t_{WEH}$	MCLK, MWEX	$V_{CC} \geq 4.5V$	1	9	ns
			$V_{CC} < 4.5V$			
MDQM[1:0] delay time	$t_{DQML}$	MCLK, MDQM[1:0]	$V_{CC} \geq 4.5V$	1	9	ns
			$V_{CC} < 4.5V$			
MCLK ↑ → Data output time	$t_{ODS}$	MCLK, MADATA[15:0]	$V_{CC} \geq 4.5V$	MCLK+18	MCLK+24	ns
			$V_{CC} < 4.5V$			
MCLK ↑ → Data hold time	$t_{OD}$	MCLK, MADATA[15:0]	$V_{CC} \geq 4.5V$	1	18	ns
			$V_{CC} < 4.5V$		24	


**Note:** When the external load capacitance  $C_L = 30 \text{ pF}$ .

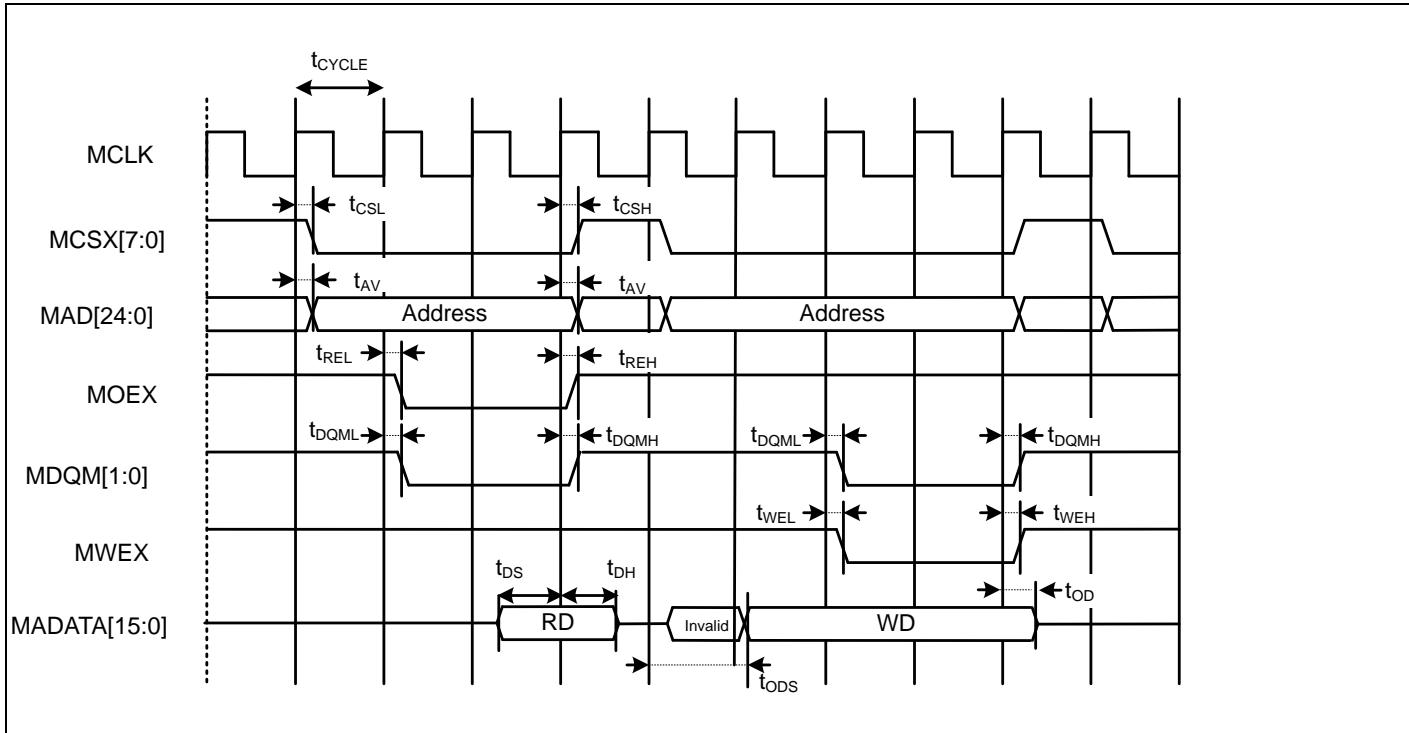

**Multiplexed Bus Access Asynchronous SRAM Mode**
 $(V_{CC} = 2.7V \text{ to } 5.5V, V_{SS} = 0V, Ta = -40^{\circ}\text{C} \text{ to } +105^{\circ}\text{C})$ 

Parameter	Symbol	Pin name	Conditions	Value		Unit
				Min	Max	
Multiplexed address delay time	$t_{ALE-CHMADV}$	MALE, MADATA[15:0]	$V_{CC} \geq 4.5V$	0	+10	ns
			$V_{CC} < 4.5V$		+20	
Multiplexed address hold time	$t_{CHMADH}$	MADATA[15:0]	$V_{CC} \geq 4.5V$	MCLK $xn+0$	MCLK $xn+12$	ns
			$V_{CC} < 4.5V$	MCLK $xn+0$	MCLK $xn+20$	


**Note:** When the external load capacitance  $C_L = 30 \text{ pF}$  ( $m = 0 \text{ to } 15, n = 1 \text{ to } 16$ ).

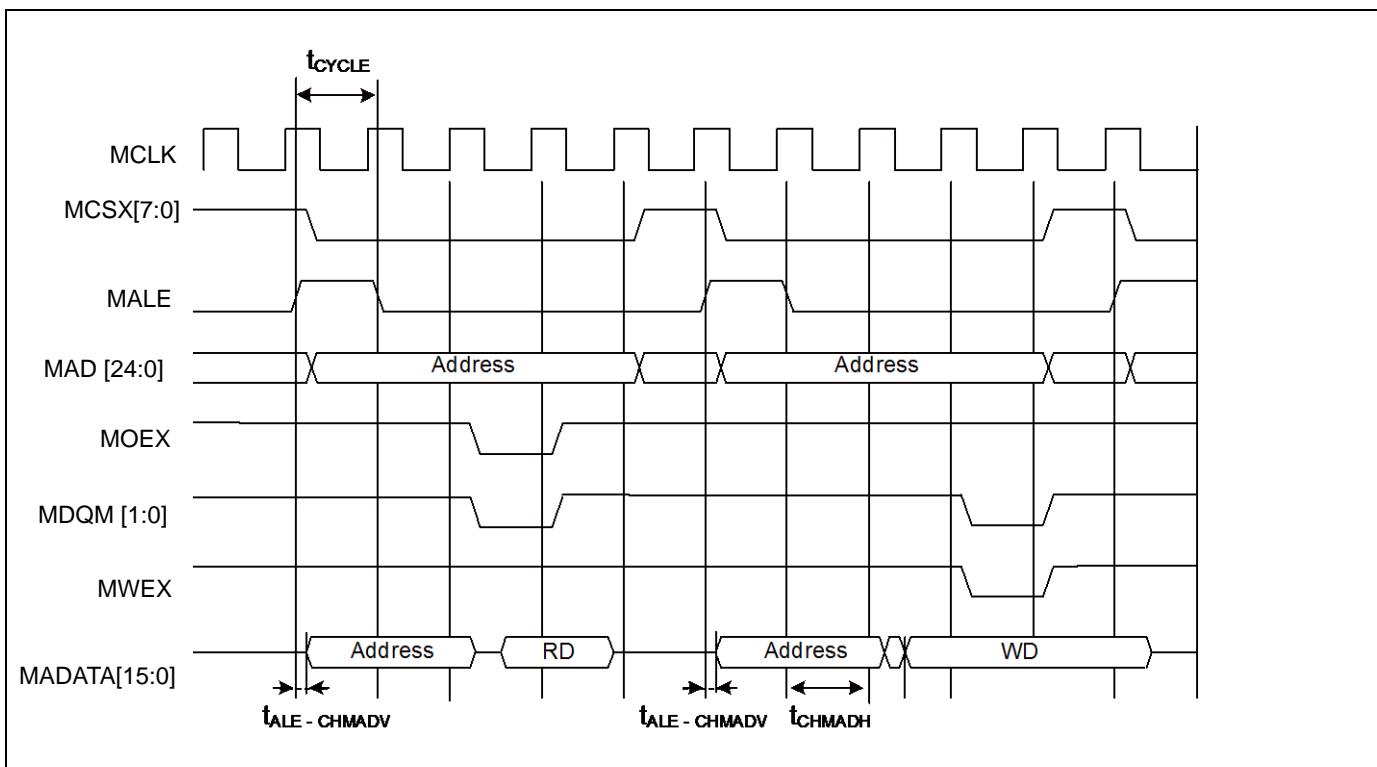

**Multiplexed Bus Access Synchronous SRAM Mode**
 $(V_{CC} = 2.7V \text{ to } 5.5V, V_{SS} = 0V, Ta = -40^{\circ}\text{C} \text{ to } +105^{\circ}\text{C})$ 

Parameter	Symbol	Pin name	Conditions	Value		Unit	Remarks	
				Min	Max			
MALE delay time	$t_{CHAL}$	MCLK, ALE	$V_{CC} \geq 4.5V$	1	9	ns		
			$V_{CC} < 4.5V$		12	ns		
	$t_{CHAH}$		$V_{CC} \geq 4.5V$	1	9	ns		
			$V_{CC} < 4.5V$		12	ns		
MCLK $\uparrow \rightarrow$ Multiplexed Address delay time	$t_{CHMADV}$	MCLK, MADATA[15:0]	$V_{CC} \geq 4.5V$	1	$t_{OD}$	ns		
MCLK $\uparrow \rightarrow$ Multiplexed Data output time	$t_{CHMADX}$		$V_{CC} < 4.5V$					
			$V_{CC} \geq 4.5V$	1	$t_{OD}$	ns		
			$V_{CC} < 4.5V$					



**Note:** When the external load capacitance  $C_L = 30 \text{ pF}$ .

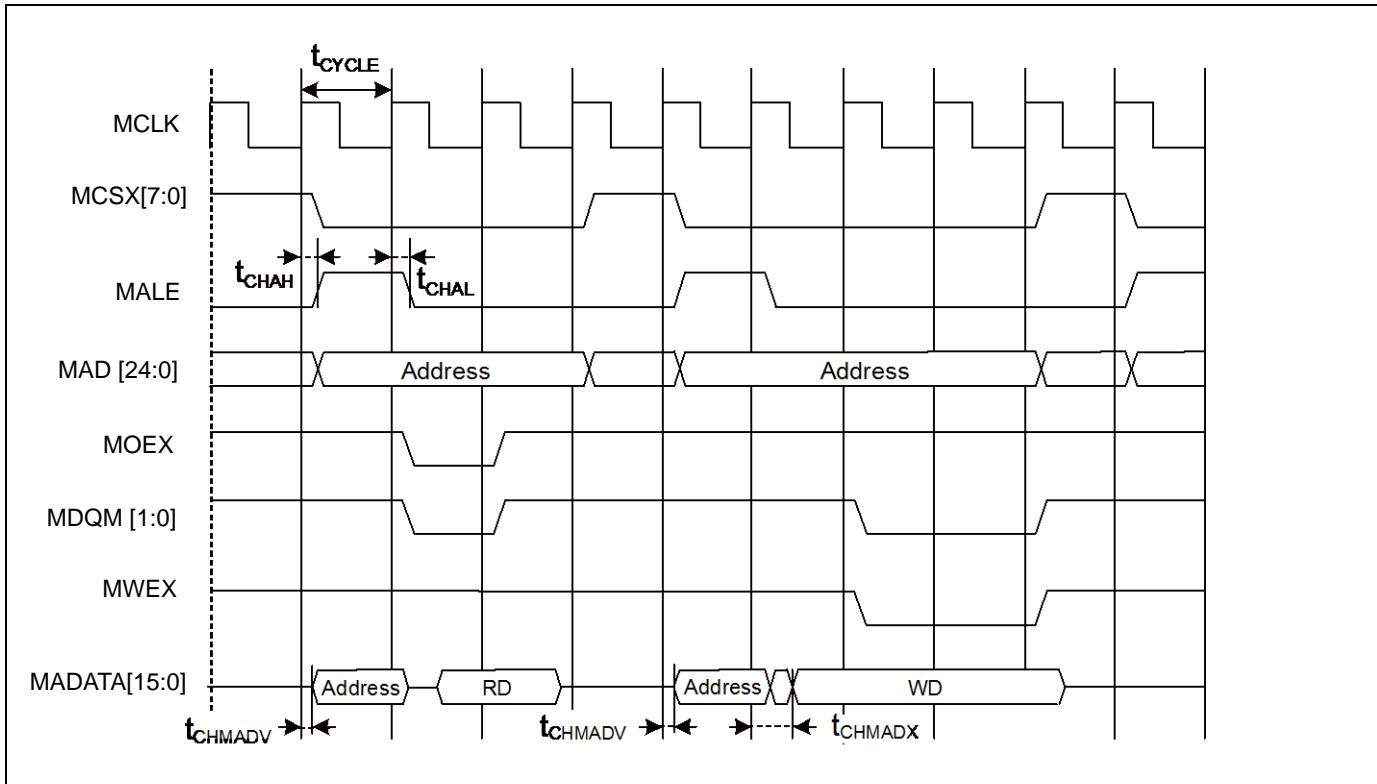


**NAND Flash Memory Mode**
 $(V_{CC} = 2.7V \text{ to } 5.5V, V_{SS} = 0V, Ta = -40^{\circ}\text{C} \text{ to } +105^{\circ}\text{C})$ 

Parameter	Symbol	Pin name	Conditions	Value		Unit
				Min	Max	
MNREX Min pulse width	$t_{NREW}$	MNREX	$V_{CC} \geq 4.5V$	MCLKxn-3	-	ns
			$V_{CC} < 4.5V$			
Data setup → MNREX↑time	$t_{DS-NRE}$	MNREX, MADATA[15:0]	$V_{CC} \geq 4.5V$	20	-	ns
			$V_{CC} < 4.5V$	38	-	
MNREX↑→ Data hold time	$t_{DH-NRE}$	MNREX, MADATA[15:0]	$V_{CC} \geq 4.5V$	0	-	ns
			$V_{CC} < 4.5V$			
MNALE↑→ MNWEX delay time	$t_{ALEH-NWEL}$	MNALE, MNWEX	$V_{CC} \geq 4.5V$	MCLKxm-9	MCLKxm+9	ns
			$V_{CC} < 4.5V$	MCLKxm-12	MCLKxm+12	
MNALE↓→ MNWEX delay time	$t_{ALEL-NWEL}$	MNALE, MNWEX	$V_{CC} \geq 4.5V$	MCLKxm-9	MCLKxm+9	ns
			$V_{CC} < 4.5V$	MCLKxm-12	MCLKxm+12	
MNCLE↑→ MNWEX delay time	$t_{CLEH-NWEL}$	MNCLE, MNWEX	$V_{CC} \geq 4.5V$	MCLKxm-9	MCLKxm+9	ns
			$V_{CC} < 4.5V$	MCLKxm-12	MCLKxm+12	
MNWEX↑→ MNCLE delay time	$t_{NWEH-CLEL}$	MNCLE, MNWEX	$V_{CC} \geq 4.5V$	0	MCLKxm+9	ns
			$V_{CC} < 4.5V$		MCLKxm+12	
MNWEX Min pulse width	$t_{NWEW}$	MNWEX	$V_{CC} \geq 4.5V$	MCLKxn-3	-	ns
			$V_{CC} < 4.5V$			
MNWEX↓→ Data output time	$t_{NWEL-DV}$	MNWEX, MADATA[15:0]	$V_{CC} \geq 4.5V$	-9	+9	ns
			$V_{CC} < 4.5V$	-12	+12	
MNWEX↑→ Data hold time	$t_{NWEH-DX}$	MNWEX, MADATA[15:0]	$V_{CC} \geq 4.5V$	0	MCLKxm+11	ns
			$V_{CC} < 4.5V$		MCLKxm+12	

**Note:** When the external load capacitance  $C_L = 30 \text{ pF}$  ( $m=0$  to  $15$ ,  $n=1$  to  $16$ ).

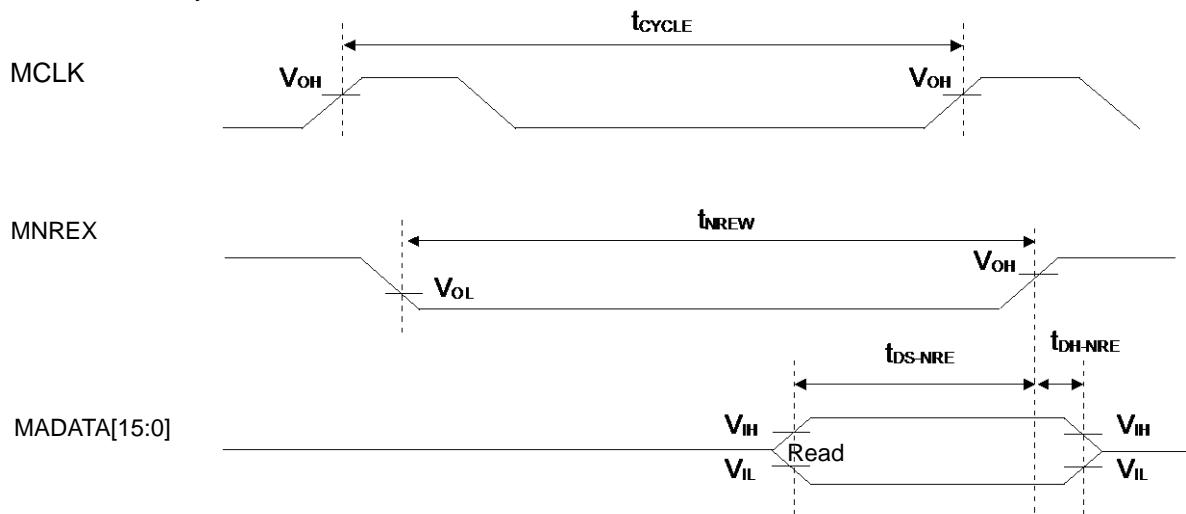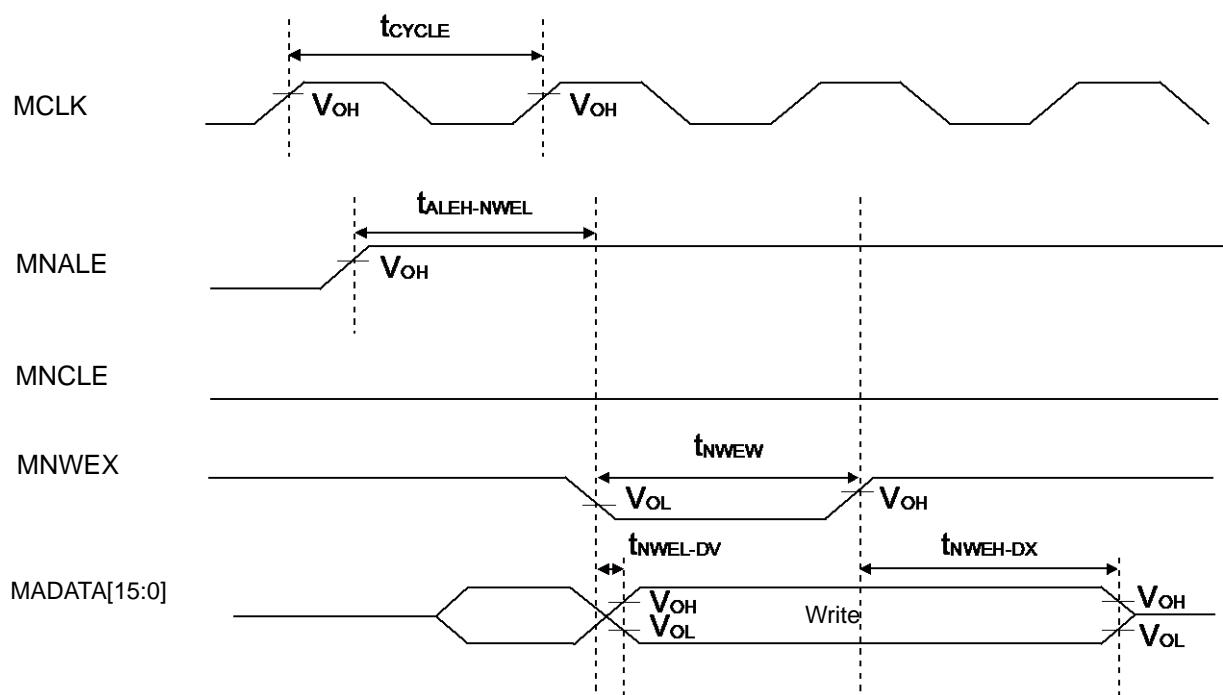**NAND Flash Memory Read**

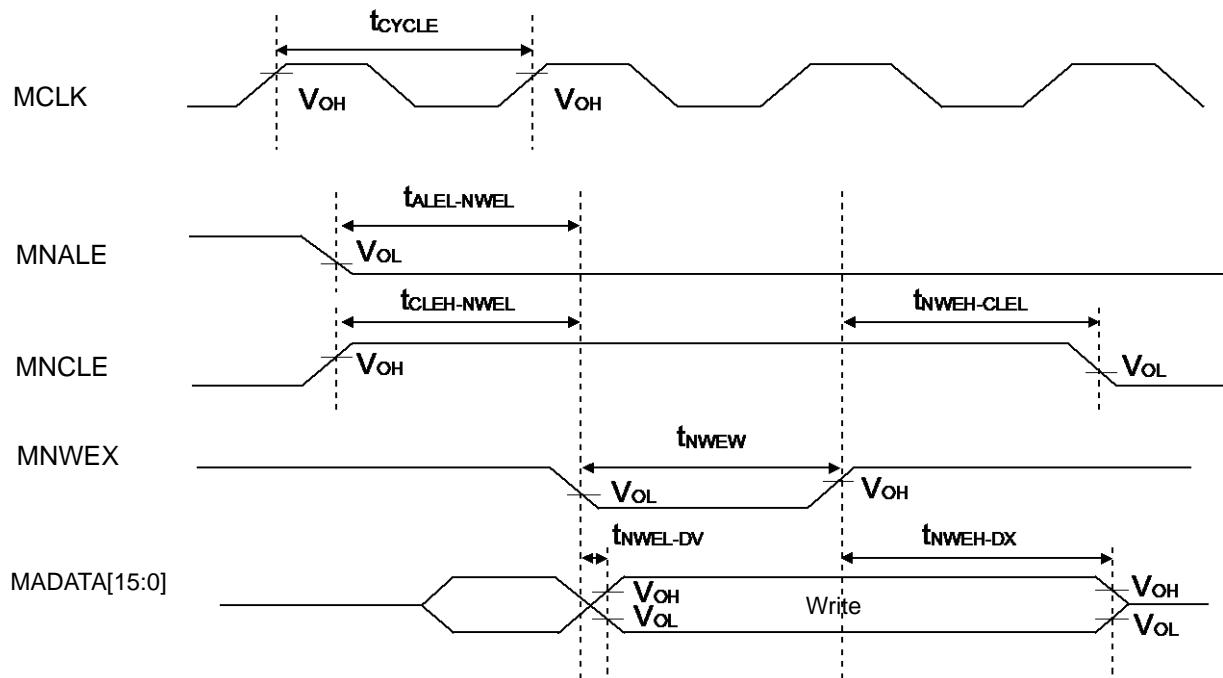**NAND Flash Memory Address Write**


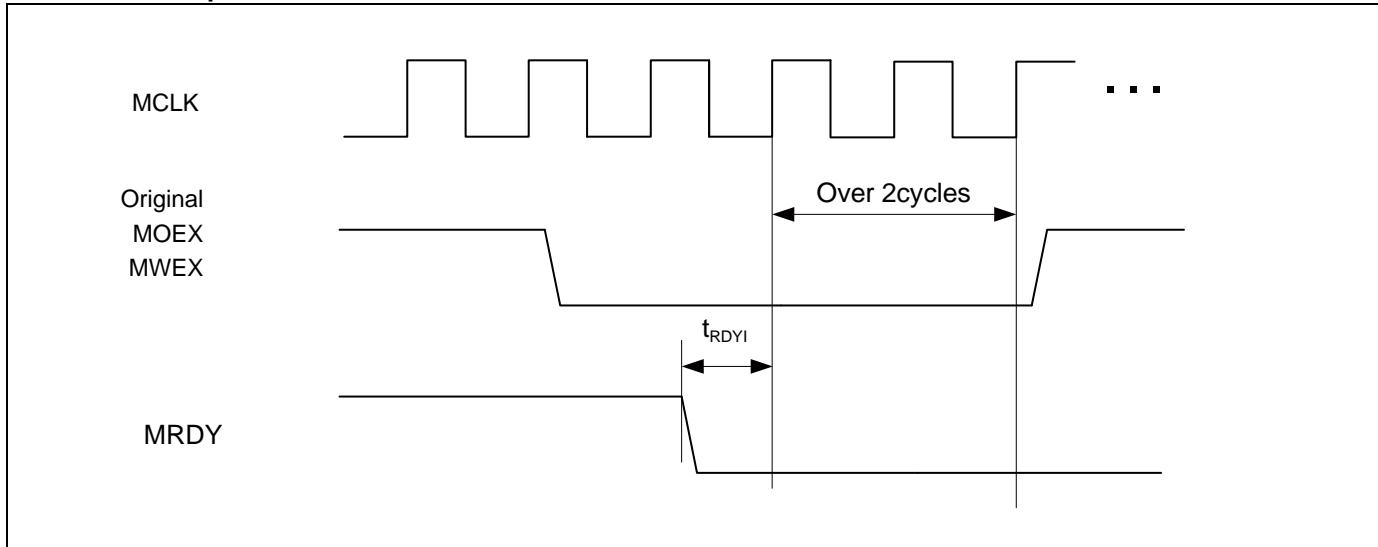
**NAND Flash Memory Command Write**


### External Ready Input Timing


( $V_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol	Pin name	Conditions	Value		Unit	Remarks
				Min	Max		
MCLK ↑ MRDY input setup time	$t_{RDYI}$	MCLK, MRDY	$V_{CC} \geq 4.5V$	19	-	ns	
			$V_{CC} < 4.5V$	37	-		

### When RDY is input



### When RDY is released

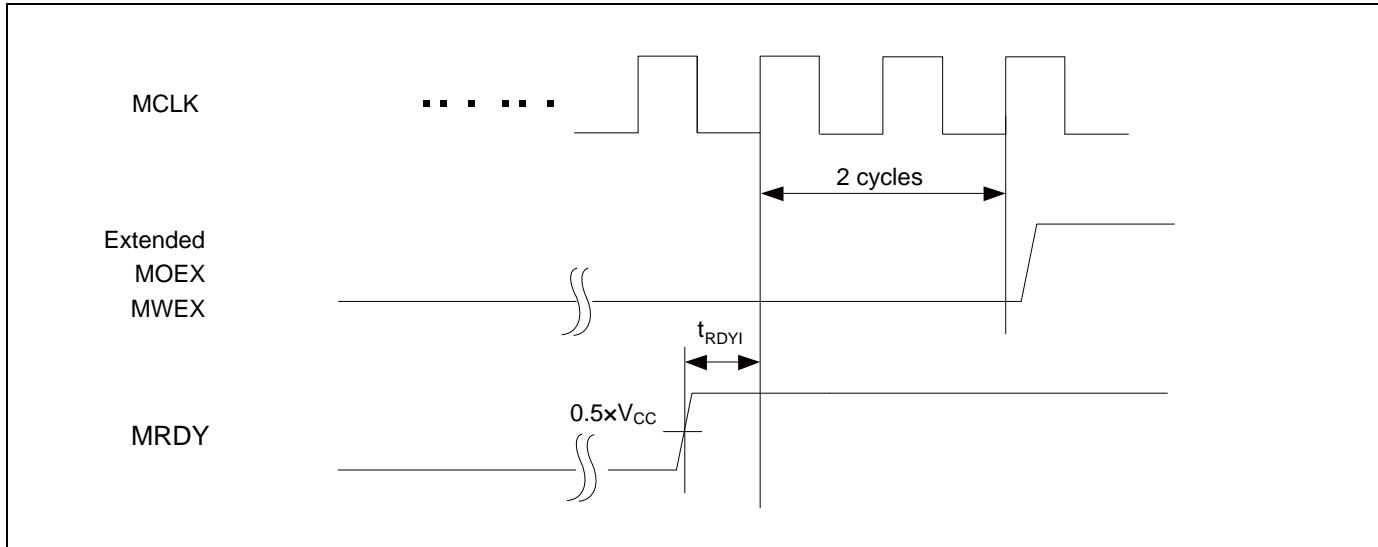


#### 12.4.9 Base Timer Input Timing

##### Timer input timing

( $V_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )


Parameter	Symbol	Pin name	Conditions	Value		Unit	Remarks
				Min	Max		
Input pulse width	$t_{TIWH}$ , $t_{TIWL}$	TIOAn/TIOBn (when using as ECK, TIN)	-	2t <sub>CYCP</sub>	-	ns	

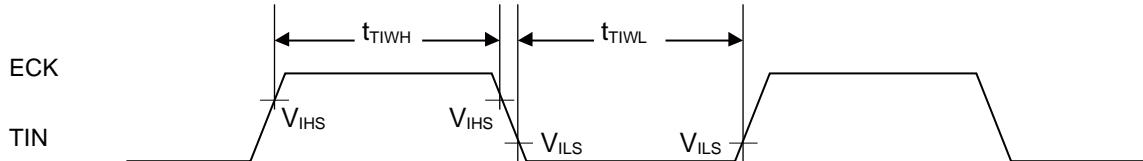

##### Trigger input timing

( $V_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol	Pin name	Conditions	Value		Unit	Remarks
				Min	Max		
Input pulse width	$t_{TRGH}$ , $t_{TRGL}$	TIOAn/TIOBn (when using as TGIn)	-	2t <sub>CYCP</sub>	-	ns	

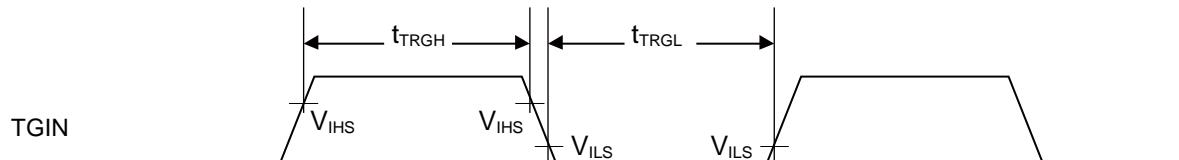

Note:  $t_{CYCP}$  indicates the APB bus clock cycle time.

About the APB bus number which the Base Timer is connected to, see "8. Block Diagram" in this data sheet.

#### 12.4.10 CSIO/UART Timing



##### CSIO (SPI = 0, SCINV = 0)

( $V_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol	Pin name	Conditions	$V_{CC} < 4.5V$		$V_{CC} \geq 4.5V$		Unit
				Min	Max	Min	Max	
Serial clock cycle time	$t_{SCYC}$	SCKx	Master mode	$4t_{CYCP}$	-	$4t_{CYCP}$	-	ns
SCK $\downarrow$ $\rightarrow$ SOT delay time	$t_{SLOVI}$	SCKx, SOTx		-30	+30	-20	+20	ns
SIN $\rightarrow$ SCK $\uparrow$ setup time	$t_{IVSHI}$	SCKx, SINx		50	-	30	-	ns
SCK $\uparrow$ $\rightarrow$ SIN hold time	$t_{SHIXI}$	SCKx, SINx		0	-	0	-	ns
Serial clock "L" pulse width	$t_{SLSH}$	SCKx	Slave mode	$2t_{CYCP} - 10$	-	$2t_{CYCP} - 10$	-	ns
Serial clock "H" pulse width	$t_{SHSL}$	SCKx		$t_{CYCP} + 10$	-	$t_{CYCP} + 10$	-	ns
SCK $\downarrow$ $\rightarrow$ SOT delay time	$t_{SLOVE}$	SCKx, SOTx		-	50	-	33	ns
SIN $\rightarrow$ SCK $\uparrow$ setup time	$t_{IVSHE}$	SCKx, SINx		10	-	10	-	ns
SCK $\uparrow$ $\rightarrow$ SIN hold time	$t_{SHIXE}$	SCKx, SINx		20	-	20	-	ns
SCK falling time	$t_F$	SCKx		-	5	-	5	ns
SCK rising time	$t_R$	SCKx		-	5	-	5	ns

##### Notes:

- The above characteristics apply to CLK synchronous mode.
- $t_{CYCP}$  indicates the APB bus clock cycle time.
- About the APB bus number which Multi-function Serial is connected to, see "8. Block Diagram" in this data sheet.
- These characteristics only guarantee the same relocate port number.  
For example, the combination of SCKx\_0 and SOTx\_1 is not guaranteed.
- When the external load capacitance  $C_L = 30$  pF.

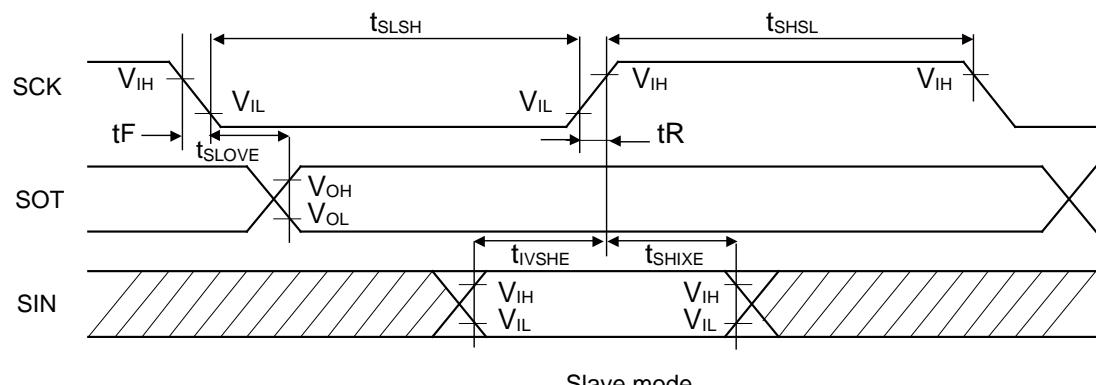
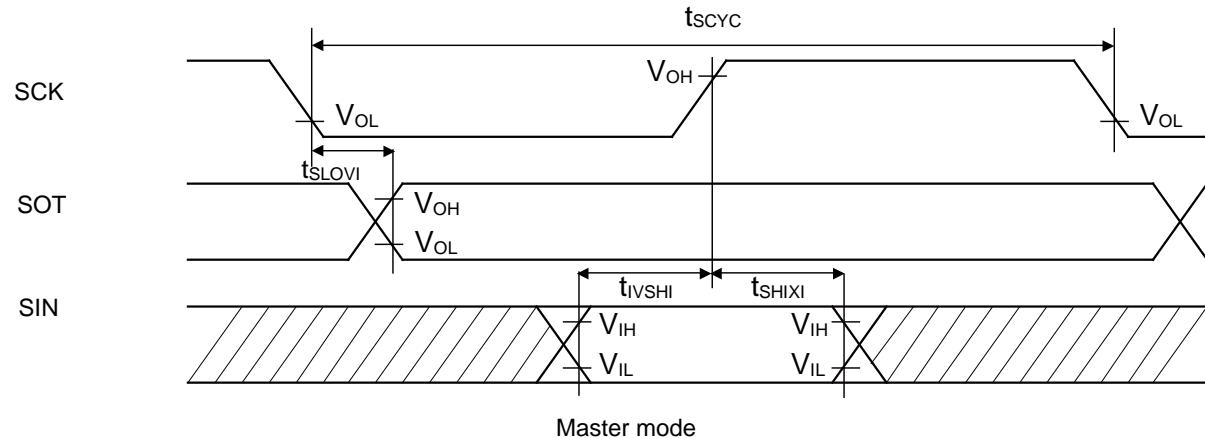


**CSIO (SPI = 0, SCINV = 1)**
 $(V_{CC} = 2.7V \text{ to } 5.5V, V_{SS} = 0V, Ta = -40^{\circ}\text{C} \text{ to } +105^{\circ}\text{C})$ 

Parameter	Symbol	Pin name	Conditions	$V_{CC} < 4.5V$		$V_{CC} \geq 4.5V$		Unit
				Min	Max	Min	Max	
Serial clock cycle time	$t_{SCYC}$	SCKx	Master mode	$4t_{CYCP}$	-	$4t_{CYCP}$	-	ns
SCK $\uparrow \rightarrow$ SOT delay time	$t_{SHOVI}$	SCKx, SOTx		-30	+30	-20	+20	ns
SIN $\rightarrow$ SCK $\downarrow$ setup time	$t_{IVSLI}$	SCKx, SINx		50	-	30	-	ns
SCK $\downarrow \rightarrow$ SIN hold time	$t_{SLIXI}$	SCKx, SINx		0	-	0	-	ns
Serial clock "L" pulse width	$t_{SLSH}$	SCKx	Slave mode	$2t_{CYCP} - 10$	-	$2t_{CYCP} - 10$	-	ns
Serial clock "H" pulse width	$t_{SHSL}$	SCKx		$t_{CYCP} + 10$	-	$t_{CYCP} + 10$	-	ns
SCK $\uparrow \rightarrow$ SOT delay time	$t_{SHOVE}$	SCKx, SOTx		-	50	-	33	ns
SIN $\rightarrow$ SCK $\downarrow$ setup time	$t_{IVSLE}$	SCKx, SINx		10	-	10	-	ns
SCK $\downarrow \rightarrow$ SIN hold time	$t_{SLIXE}$	SCKx, SINx		20	-	20	-	ns
SCK falling time	$t_F$	SCKx		-	5	-	5	ns
SCK rising time	$t_R$	SCKx		-	5	-	5	ns

**Notes:**

- The above characteristics apply to CLK synchronous mode.
- $t_{CYCP}$  indicates the APB bus clock cycle time.
- About the APB bus number which Multi-function Serial is connected to, see "8. Block Diagram" in this data sheet.
- These characteristics only guarantee the same relocate port number.  
For example, the combination of SCKx\_0 and SOTx\_1 is not guaranteed.
- When the external load capacitance  $C_L = 30 \text{ pF}$ .

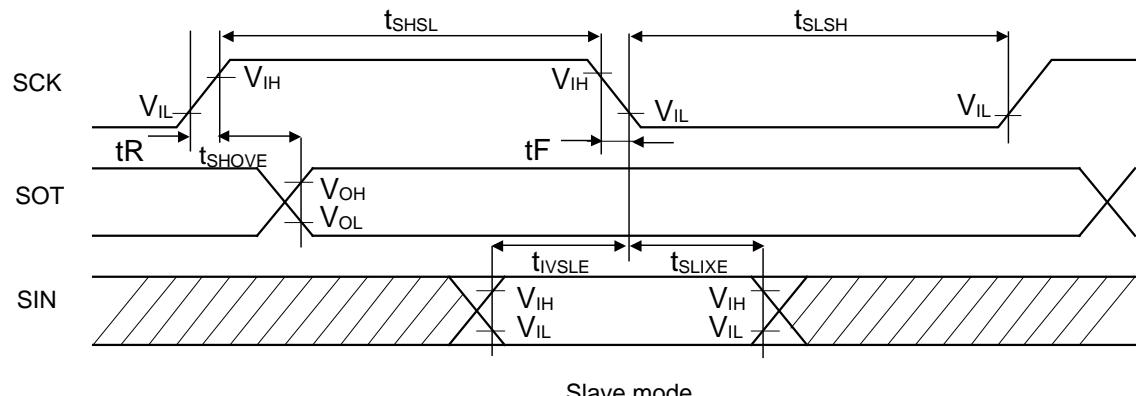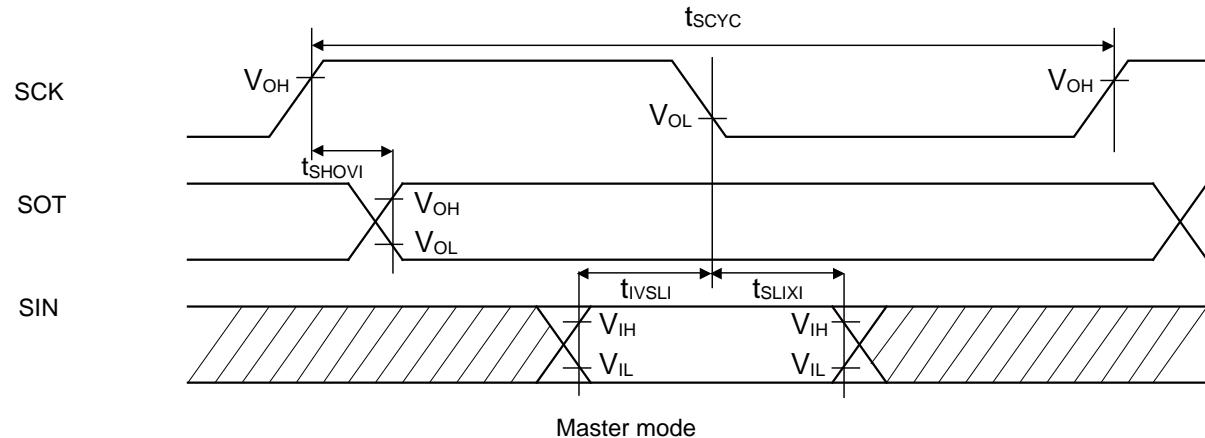


**CSIO (SPI = 1, SCINV = 0)**
 $(V_{CC} = 2.7V \text{ to } 5.5V, V_{SS} = 0V, Ta = -40^{\circ}\text{C} \text{ to } +105^{\circ}\text{C})$ 


Parameter	Symbol	Pin name	Conditions	$V_{CC} < 4.5V$		$V_{CC} \geq 4.5V$		Unit
				Min	Max	Min	Max	
Serial clock cycle time	$t_{SCYC}$	SCKx	Master mode	$4t_{CYCP}$	-	$4t_{CYCP}$	-	ns
SCK $\uparrow \rightarrow$ SOT delay time	$t_{SHOVI}$	SCKx, SOTx		- 30	+ 30	- 20	+ 20	ns
SIN $\rightarrow$ SCK $\downarrow$ setup time	$t_{IVSLI}$	SCKx, SINx		50	-	30	-	ns
SCK $\downarrow \rightarrow$ SIN hold time	$t_{SLIXI}$	SCKx, SINx		0	-	0	-	ns
SOT $\rightarrow$ SCK $\downarrow$ delay time	$t_{SOVLI}$	SCKx, SOTx		$2t_{CYCP} - 30$	-	$2t_{CYCP} - 30$	-	ns
Serial clock "L" pulse width	$t_{SLSH}$	SCKx	Slave mode	$2t_{CYCP} - 10$	-	$2t_{CYCP} - 10$	-	ns
Serial clock "H" pulse width	$t_{SHSL}$	SCKx		$t_{CYCP} + 10$	-	$t_{CYCP} + 10$	-	ns
SCK $\uparrow \rightarrow$ SOT delay time	$t_{SHOVE}$	SCKx, SOTx		-	50	-	33	ns
SIN $\rightarrow$ SCK $\downarrow$ setup time	$t_{IVSLE}$	SCKx, SINx		10	-	10	-	ns
SCK $\downarrow \rightarrow$ SIN hold time	$t_{SLIXE}$	SCKx, SINx		20	-	20	-	ns
SCK falling time	$t_F$	SCKx		-	5	-	5	ns
SCK rising time	$t_R$	SCKx		-	5	-	5	ns

**Notes:**

- The above characteristics apply to CLK synchronous mode.
- $t_{CYCP}$  indicates the APB bus clock cycle time.
- About the APB bus number which Multi-function Serial is connected to, see "8. Block Diagram" in this data sheet.
- These characteristics only guarantee the same relocate port number.  
For example, the combination of SCKx\_0 and SOTx\_1 is not guaranteed.
- When the external load capacitance  $C_L = 30 \text{ pF}$ .

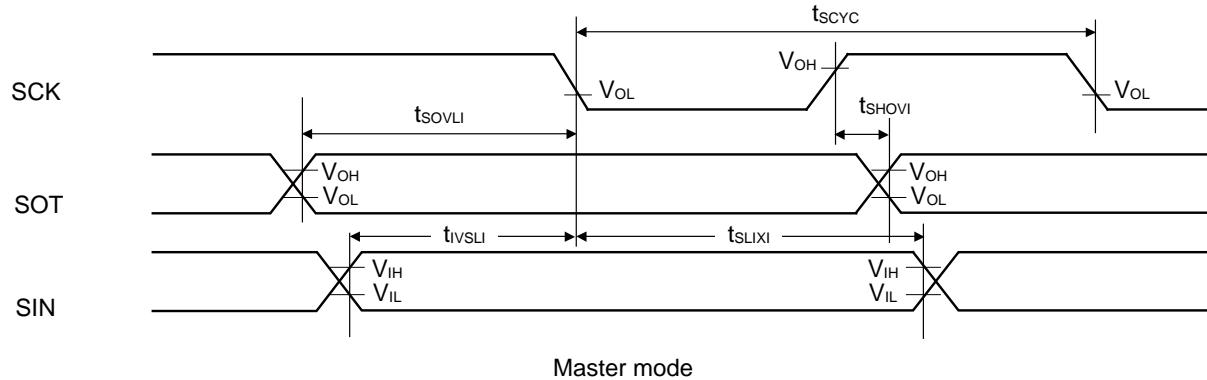

Master mode

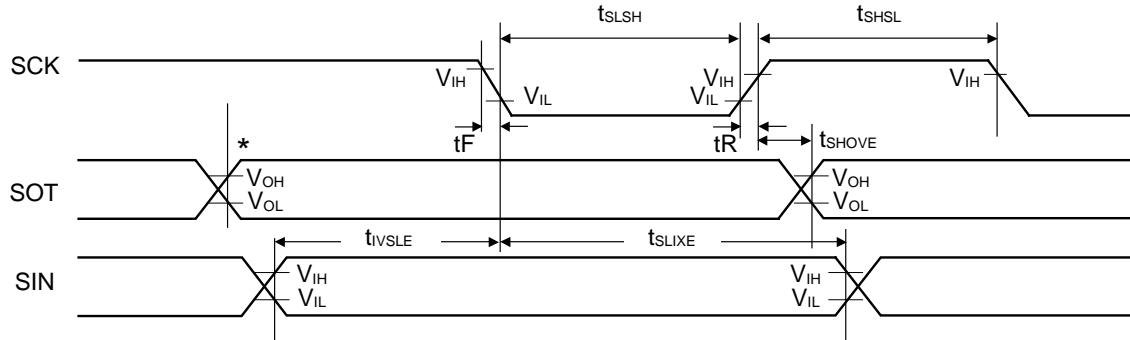

Slave mode


\* : Changes when writing to TDR register

**CSIO (SPI = 1, SCINV = 1)**
 $(V_{CC} = 2.7V \text{ to } 5.5V, V_{SS} = 0V, Ta = -40^{\circ}\text{C} \text{ to } +105^{\circ}\text{C})$ 


Parameter	Symbol	Pin name	Conditions	$V_{CC} < 4.5V$		$V_{CC} \geq 4.5V$		Unit
				Min	Max	Min	Max	
Serial clock cycle time	$t_{SCYC}$	SCKx	Master mode	$4t_{CYCP}$	-	$4t_{CYCP}$	-	ns
$SCK \downarrow \rightarrow SOT$ delay time	$t_{SLOVI}$	SCKx, SOTx		- 30	+ 30	- 20	+ 20	ns
$SIN \rightarrow SCK \uparrow$ setup time	$t_{IVSHI}$	SCKx, SINx		50	-	30	-	ns
$SCK \uparrow \rightarrow SIN$ hold time	$t_{SHIXI}$	SCKx, SINx		0	-	0	-	ns
$SOT \rightarrow SCK \uparrow$ delay time	$t_{SOVHI}$	SCKx, SOTx		$2t_{CYCP} - 30$	-	$2t_{CYCP} - 30$	-	ns
Serial clock "L" pulse width	$t_{SLSH}$	SCKx		$2t_{CYCP} - 10$	-	$2t_{CYCP} - 10$	-	ns
Serial clock "H" pulse width	$t_{SHSL}$	SCKx	Slave mode	$t_{CYCP} + 10$	-	$t_{CYCP} + 10$	-	ns
$SCK \downarrow \rightarrow SOT$ delay time	$t_{SLOVE}$	SCKx, SOTx		-	50	-	33	ns
$SIN \rightarrow SCK \uparrow$ setup time	$t_{IVSHE}$	SCKx, SINx		10	-	10	-	ns
$SCK \uparrow \rightarrow SIN$ hold time	$t_{SHIXE}$	SCKx, SINx		20	-	20	-	ns
SCK falling time	$t_F$	SCKx		-	5	-	5	ns
SCK rising time	$t_R$	SCKx		-	5	-	5	ns

**Notes:**

- The above characteristics apply to CLK synchronous mode.
- $t_{CYCP}$  indicates the APB bus clock cycle time.
- About the APB bus number which Multi-function Serial is connected to, see "8. Block Diagram" in this data sheet.
- These characteristics only guarantee the same relocate port number.  
For example, the combination of SCKx\_0 and SOTx\_1 is not guaranteed.
- When the external load capacitance  $C_L = 30 \text{ pF}$ .

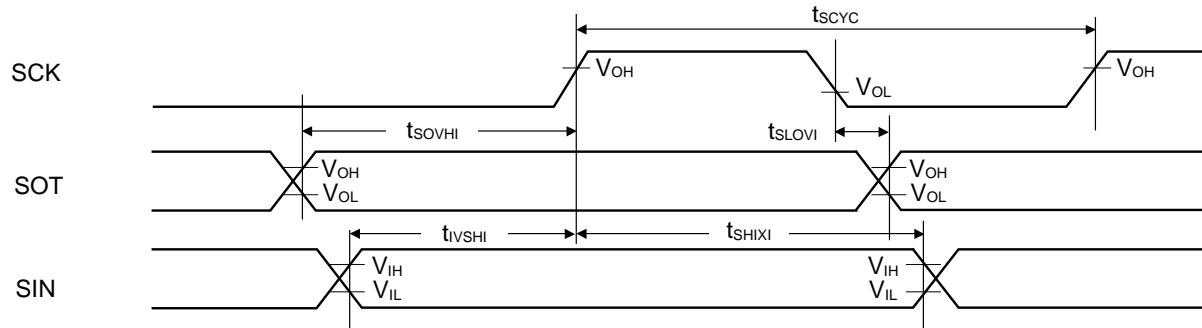

Master mode

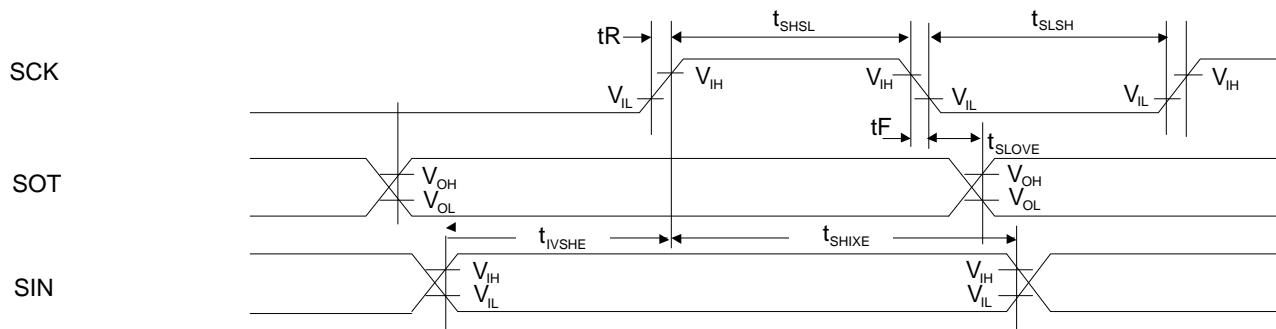


Slave mode

#### UART external clock input (EXT = 1)

( $V_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol	Conditions	Value		Unit	Remarks
			Min	Max		
Serial clock "L" pulse width	$t_{SLSH}$	$C_L = 30 \text{ pF}$	$t_{CYCP} + 10$	-	ns	
Serial clock "H" pulse width	$t_{SHSL}$		$t_{CYCP} + 10$	-	ns	
SCK falling time	$t_F$		-	5	ns	
SCK rising time	$t_R$		-	5	ns	

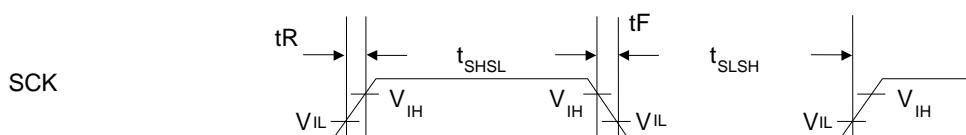

**12.4.11 External Input Timing**
 $(V_{CC} = 2.7V \text{ to } 5.5V, V_{SS} = 0V, Ta = -40^{\circ}\text{C} \text{ to } +105^{\circ}\text{C})$ 

Parameter	Symbol	Pin name	Conditions	Value		Unit	Remarks
				Min	Max		
Input pulse width	$t_{INH}, t_{INL}$	ADTG	-	$2t_{CYCP}^{*1}$	-	ns	A/D converter trigger input
		FRCKx					Free-run timer input clock
		ICxx	-	-	-	-	Input capture
		DTTlxX	-	$2t_{CYCP}^{*1}$	-	ns	Waveform generator
		INTxx	*2	$2t_{CYCP}^{*1} + 100^{*1}$	-	ns	External interrupt, NMI
			*3	500	-	ns	
		WKUPx	*4	500	-	ns	Deep standby wake up


\*1 :  $t_{CYCP}$  indicates the APB bus clock cycle time.

About the APB bus number which the A/D converter, Multi-function Timer, External interrupt are connected to, see "8. Block Diagram" in this data sheet.

\*2 : When in RUN mode, in SLEEP mode.

\*3 : When in STOP mode, in TIMER mode.

\*4 : When in Deep standby RTC mode, in Deep standby STOP mode.

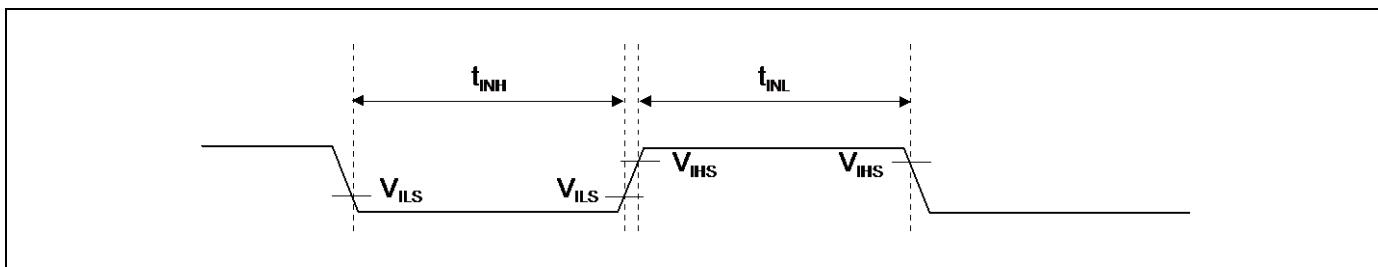





**12.4.12 Quadrature Position/Revolution Counter timing**
 $(V_{CC} = 2.7V \text{ to } 5.5V, V_{SS} = 0V, Ta = -40^{\circ}\text{C} \text{ to } +105^{\circ}\text{C})$ 

Parameter	Symbol	Conditions	Value		Unit
			Min	Max	
AIN pin "H" width	$t_{AHL}$	-			
AIN pin "L" width	$t_{ALL}$	-			
BIN pin "H" width	$t_{BHL}$	-			
BIN pin "L" width	$t_{BLL}$	-			
Time from AIN pin "H" level to BIN rise	$t_{AUBU}$	PC_Mode2 or PC_Mode3			
Time from BIN pin "H" level to AIN fall	$t_{BUAD}$	PC_Mode2 or PC_Mode3			
Time from AIN pin "L" level to BIN fall	$t_{ADBD}$	PC_Mode2 or PC_Mode3			
Time from BIN pin "L" level to AIN rise	$t_{BDAU}$	PC_Mode2 or PC_Mode3			
Time from BIN pin "H" level to AIN rise	$t_{BUAU}$	PC_Mode2 or PC_Mode3			
Time from AIN pin "H" level to BIN fall	$t_{AUBD}$	PC_Mode2 or PC_Mode3			
Time from BIN pin "L" level to AIN fall	$t_{BDAD}$	PC_Mode2 or PC_Mode3			
Time from AIN pin "L" level to BIN rise	$t_{ADBU}$	PC_Mode2 or PC_Mode3			
ZIN pin "H" width	$t_{ZHL}$	QCR:CGSC="0"			
ZIN pin "L" width	$t_{ZLL}$	QCR:CGSC="0"			
Time from determined ZIN level to AIN/BIN rise and fall	$t_{ZABE}$	QCR:CGSC="1"			
Time from AIN/BIN rise and fall time to determined ZIN level	$t_{ABEZ}$	QCR:CGSC="1"			

\* :  $t_{CYCP}$  indicates the APB bus clock cycle time.

About the APB bus number which the Quadrature Position/Revolution Counter is connected to, see "8. Block Diagram" in this data sheet.

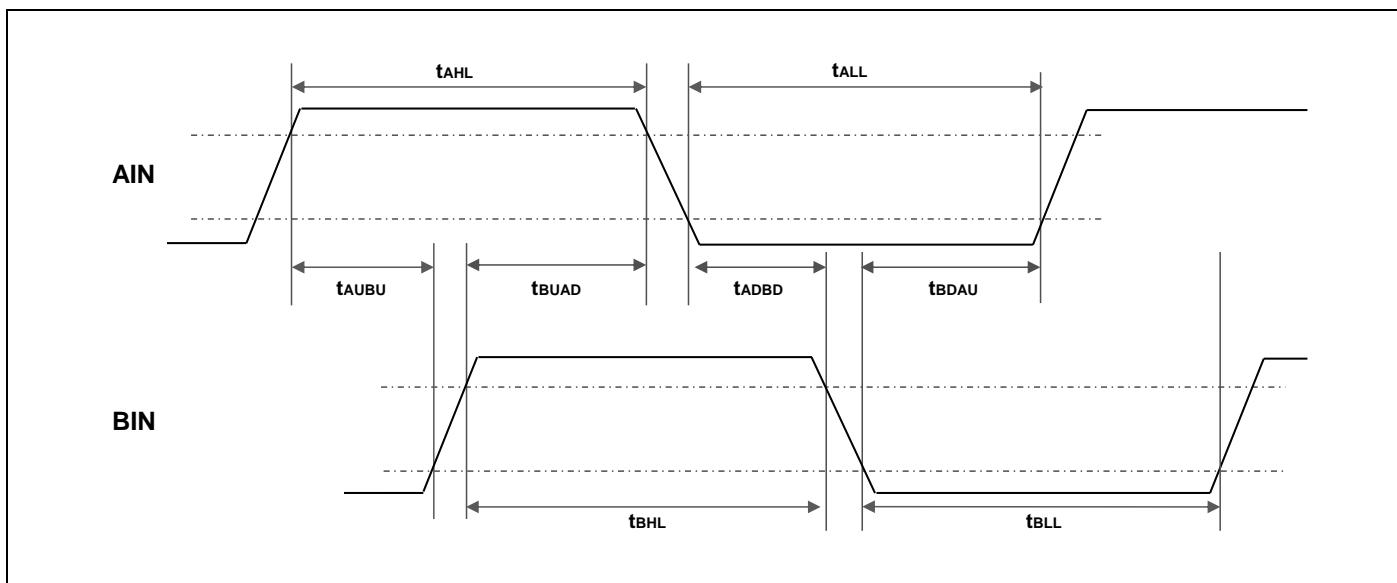

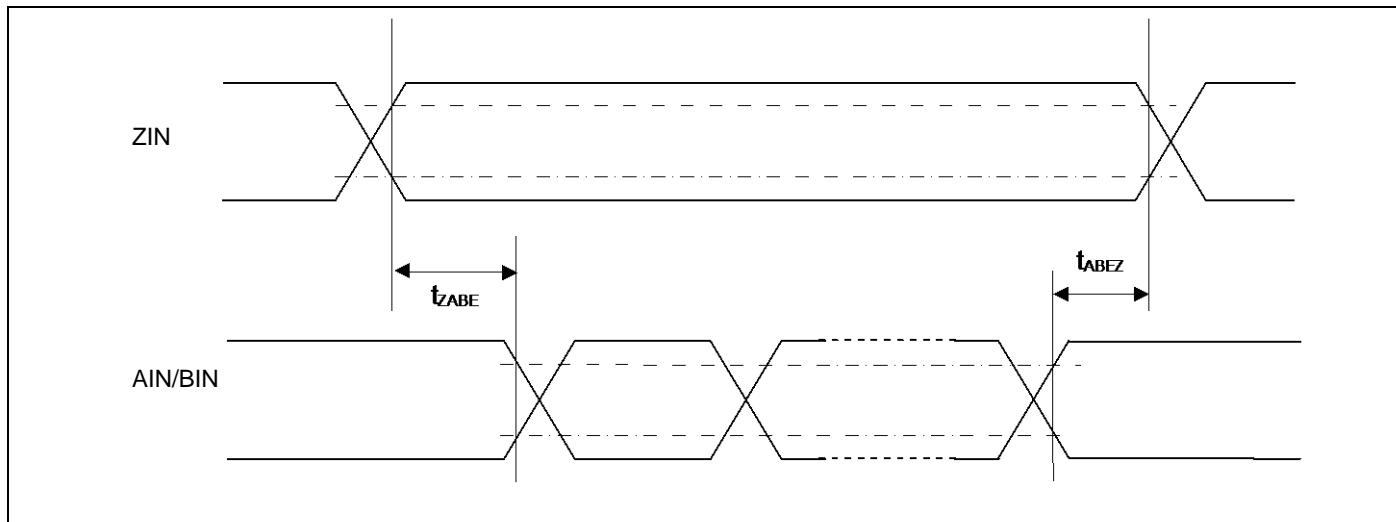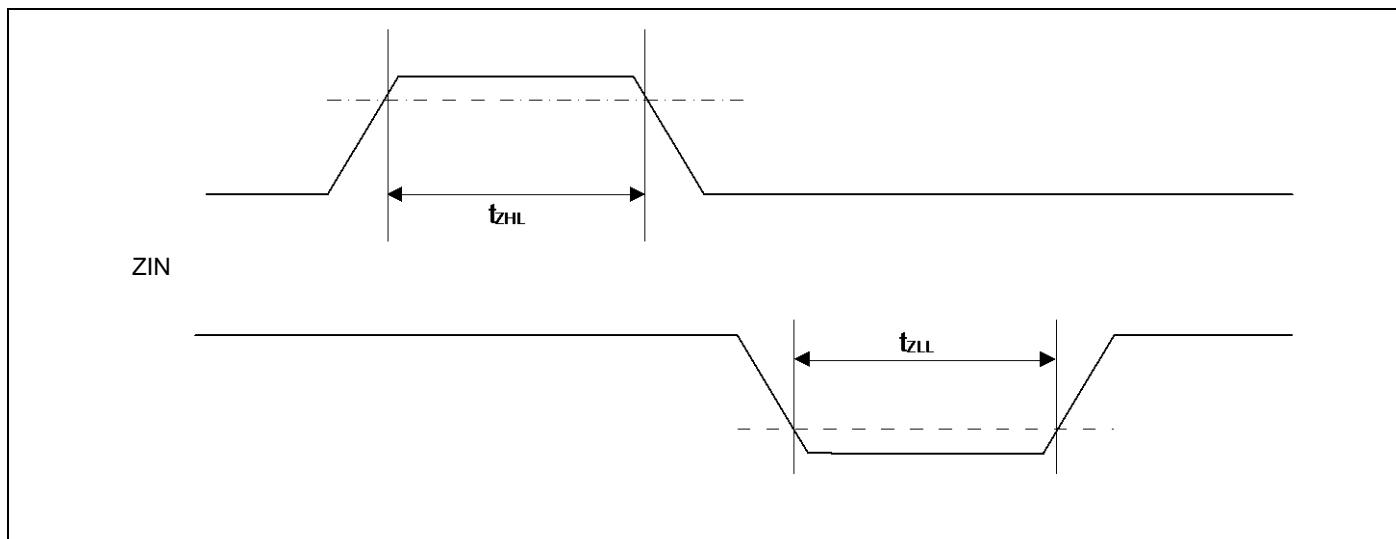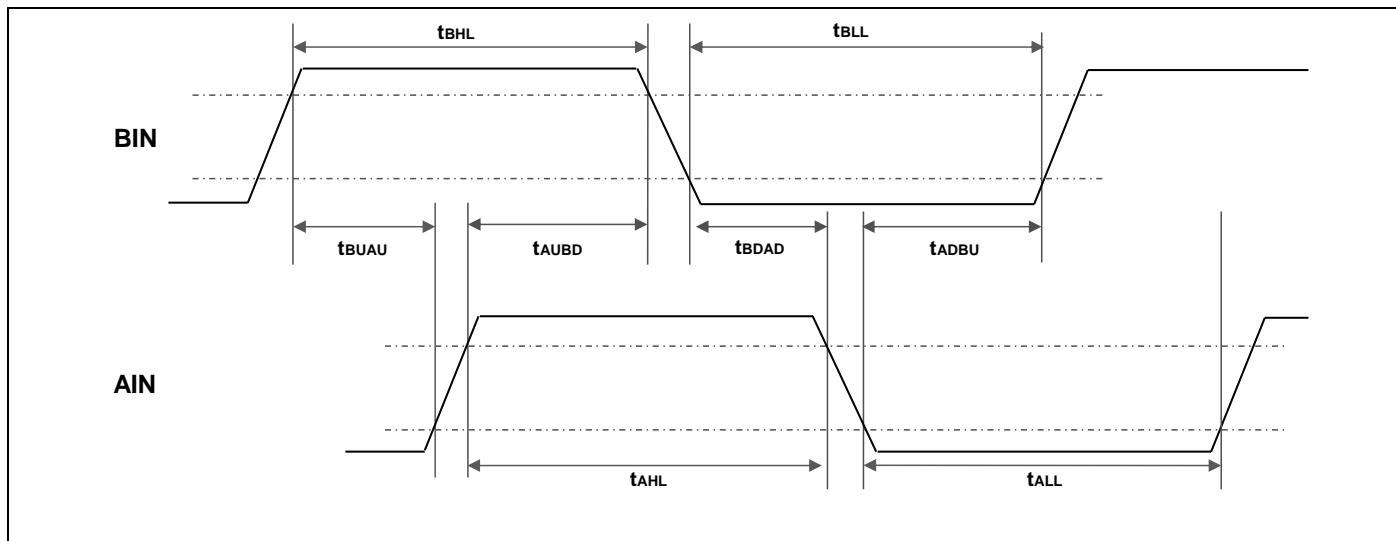

**12.4.13 I<sup>2</sup>C Timing**

 ( $V_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol	Conditions	Standard-mode		Fast-mode		Unit	Remarks
			Min	Max	Min	Max		
SCL clock frequency	$F_{SCL}$	$C_L = 30 \text{ pF}$ , $R = (V_p/I_{OL})^{*1}$	0	100	0	400	$\text{kH}z$	
(Repeated) START condition hold time SDA ↓ → SCL ↓	$t_{HDSTA}$		4.0	-	0.6	-	$\mu\text{s}$	
SCLclock "L" width	$t_{LOW}$		4.7	-	1.3	-	$\mu\text{s}$	
SCLclock "H" width	$t_{HIGH}$		4.0	-	0.6	-	$\mu\text{s}$	
(Repeated) START condition setup time SCL ↑ → SDA ↓	$t_{SUSTA}$		4.7	-	0.6	-	$\mu\text{s}$	
Data hold time SCL ↓ → SDA ↓ ↑	$t_{HDDAT}$		0	$3.45^{*2}$	0	$0.9^{*3}$	$\mu\text{s}$	
Data setup time SDA ↓ ↑ → SCL ↑	$t_{SUDAT}$		250	-	100	-	ns	
STOP condition setup time SCL ↑ → SDA ↑	$t_{SUSTO}$		4.0	-	0.6	-	$\mu\text{s}$	
Bus free time between "STOP condition" and "START condition"	$t_{BUF}$		4.7	-	1.3	-	$\mu\text{s}$	
Noise filter	$t_{SP}$		-	$2 t_{CYCP}^{*4}$	-	$2 t_{CYCP}^{*4}$	-	ns

\*1 : R and  $C_L$  represent the pull-up resistor and load capacitance of the SCL and SDA lines, respectively.

$V_p$  indicates the power supply voltage of the pull-up resistor and  $I_{OL}$  indicates  $V_{OL}$  guaranteed current.

\*2 : The maximum  $t_{HDDAT}$  must satisfy that it does not extend at least "L" period ( $t_{LOW}$ ) of device's SCL signal.


\*3 : Fast-mode I<sup>2</sup>C bus device can be used on Standard-mode I<sup>2</sup>C bus system as long as the device satisfies the requirement of " $t_{SUDAT} \geq 250 \text{ ns}$ ".

\*4 :  $t_{CYCP}$  is the APB bus clock cycle time.

About the APB bus number that I<sup>2</sup>C is connected to, see "8. Block Diagram" in this data sheet.

To use Standard-mode, set the APB bus clock at 2 MHz or more.


To use Fast-mode, set the APB bus clock at 8 MHz or more.

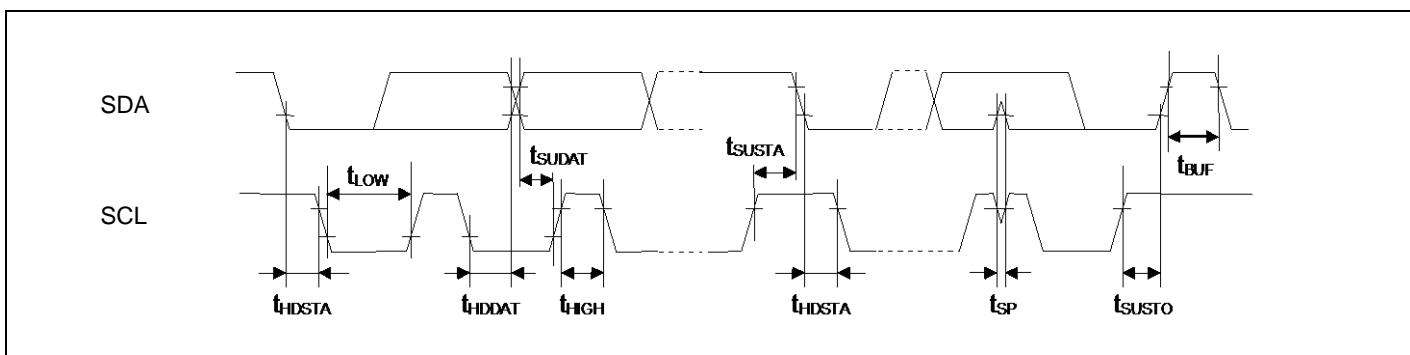

**12.4.14 ETM Timing**
 $(V_{CC} = 2.7V \text{ to } 5.5V, V_{SS} = 0V, Ta = -40^{\circ}\text{C} \text{ to } +105^{\circ}\text{C})$ 

Parameter	Symbol	Pin name	Conditions	Value		Unit	Remarks
				Min	Max		
Data hold	$t_{ETMH}$	TRACECLK, TRACED[3:0]	$V_{CC} \geq 4.5V$	2	10	ns	
			$V_{CC} < 4.5V$	2	15		
TRACECLK frequency	$1/t_{TRACE}$	TRACECLK	$V_{CC} \geq 4.5V$	-	40	MHz	
			$V_{CC} < 4.5V$	-	20	MHz	
	$t_{TRACE}$		$V_{CC} \geq 4.5V$	25	-	ns	
			$V_{CC} < 4.5V$	50	-	ns	


**Note:** When the external load capacitance  $C_L = 30 \text{ pF}$ .

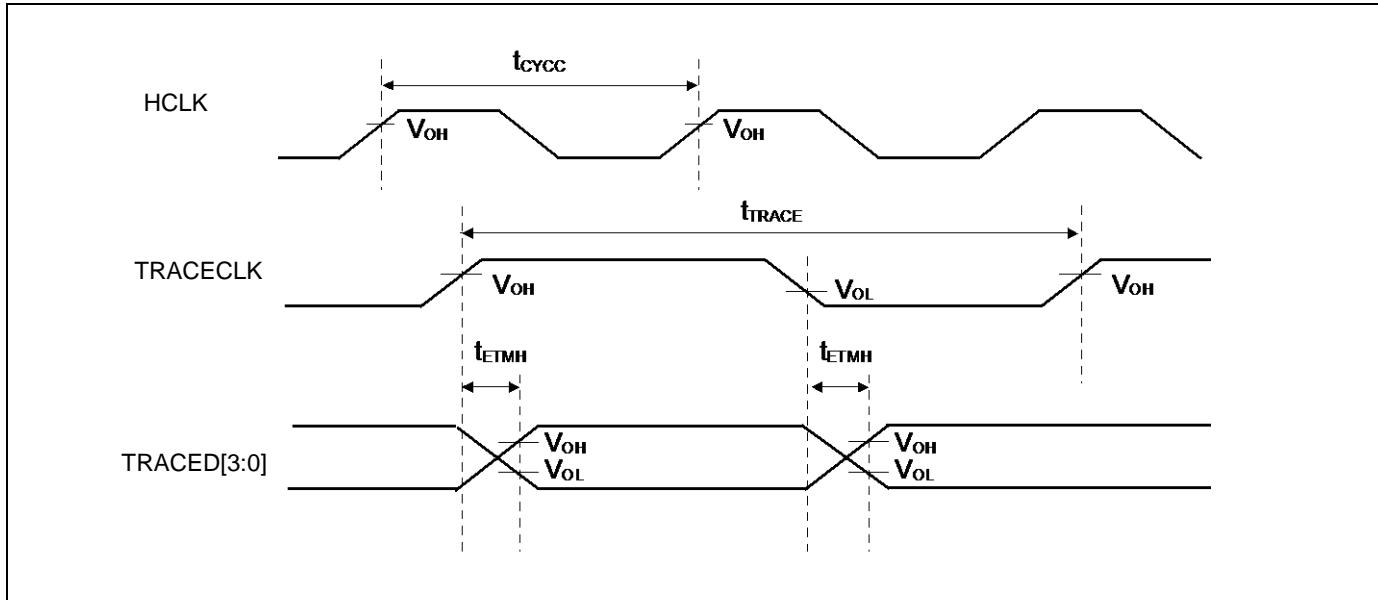

**12.4.15 JTAG Timing**
 $(V_{CC} = 2.7V \text{ to } 5.5V, V_{SS} = 0V, Ta = -40^{\circ}\text{C} \text{ to } +105^{\circ}\text{C})$ 

Parameter	Symbol	Pin name	Conditions	Value		Unit	Remarks
				Min	Max		
TMS, TDI setup time	$t_{JTAGS}$	TCK, TMS, TDI	$V_{CC} \geq 4.5V$	15	-	ns	
			$V_{CC} < 4.5V$				
TMS, TDI hold time	$t_{JTAGH}$	TCK, TMS, TDI	$V_{CC} \geq 4.5V$	15	-	ns	
			$V_{CC} < 4.5V$				
TDO delay time	$t_{JTAGD}$	TCK, TDO	$V_{CC} \geq 4.5V$	-	25	ns	
			$V_{CC} < 4.5V$		45		

Note: When the external load capacitance  $C_L = 30 \text{ pF}$ .

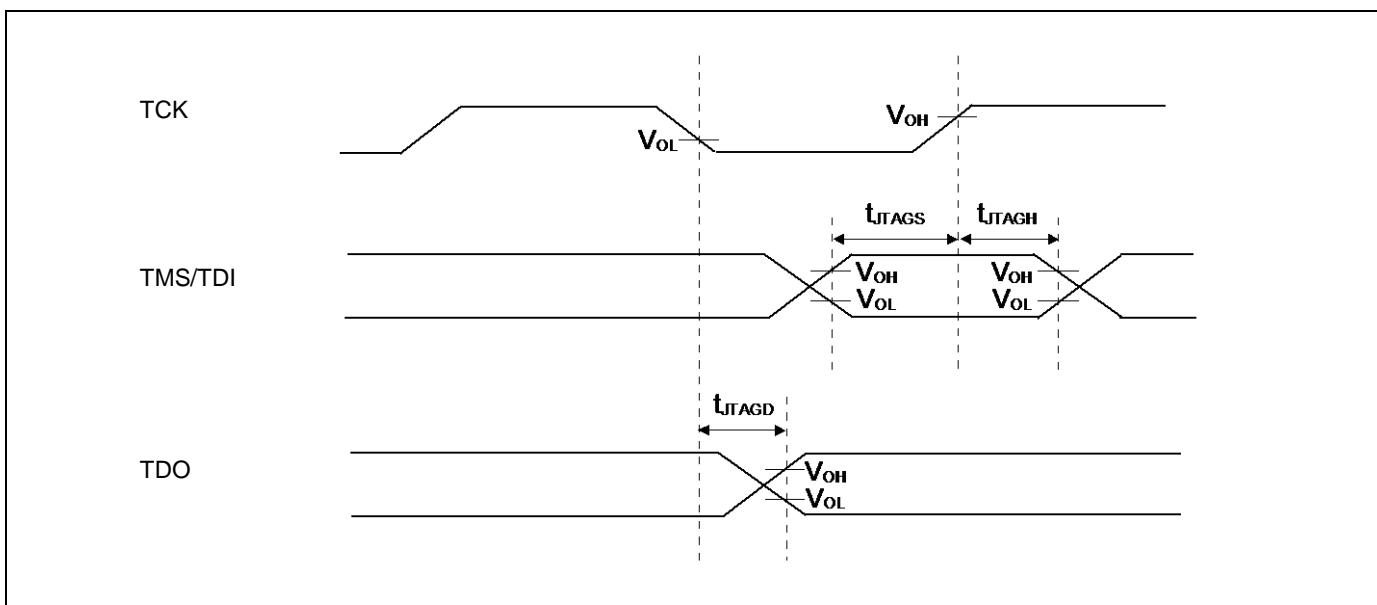

## 12.5 12-bit A/D Converter

### Electrical characteristics for the A/D converter

( $V_{CC} = AV_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = AV_{SS} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol	Pin name	Value			Unit	Remarks
			Min	Typ	Max		
Resolution	-	-	-	-	12	bit	
Integral Nonlinearity	-	-	-	$\pm 1.5$	$\pm 4.5$	LSB	
Differential Nonlinearity	-	-	-	$\pm 2.2$	$\pm 2.5$	LSB	
Zero transition voltage	$V_{ZT}$	ANxx	-	$\pm 6$	$\pm 15$	mV	$AVRH = 2.7V$ to $5.5V$
Full-scale transition voltage	$V_{FST}$	ANxx	-	$AVRH \pm 5$	$AVRH \pm 15$	mV	
Conversion time	-	-	$1.0^{*1}$	-	-	$\mu s$	
Sampling time <sup>*2</sup>	$T_s$	-	0.3	-	10	$\mu s$	
Compare clock cycle <sup>*3</sup>	$T_{CCK}$	-	50	-	1000	ns	
State transition time to operation permission	$T_{STT}$	-	-	-	1.0	$\mu s$	
Analog input capacity	$C_{AIN}$	-	-	-	9.5	pF	
Analog input resistor	$R_{AIN}$	-	-	-	1.62 2.35	k $\Omega$	$AV_{CC} \geq 4.5V$ $AV_{CC} < 4.5V$
Interchannel disparity	-	-	-	-	4	LSB	
Analog port input current	-	ANxx	-	-	5	$\mu A$	
Analog input voltage	-	ANxx	AVRL	-	AVRH	V	
Reference voltage	-	AVRH	2.7	-	AV <sub>CC</sub>	V	
	-	AVRL	AV <sub>SS</sub>	-	AV <sub>SS</sub>	V	

\*1 : The conversion time is the value of sampling time ( $T_s$ ) + compare time ( $T_c$ ).

The condition of the minimum conversion time is when the value of sampling time: 300ns, the value of compare time: 700ns ( $AV_{CC} \geq 4.5V$ ).

Ensure that it satisfies the value of the sampling time ( $T_s$ ) and compare clock cycle ( $T_{CCK}$ ).

For setting of the sampling time and compare clock cycle, see "Chapter 1-1: A/D Converter" in "FM3 Family Peripheral Manual Analog Macro Part".

The register setting of the A/D Converter are reflected in the operation according to the APB bus clock timing.


The sampling clock and compare clock is generated from the Base clock (HCLK).

About the APB bus number which the A/D Converter is connected to, see "8. Block Diagram" in this data sheet.

\*2 : A necessary sampling time changes by external impedance.

Ensure that it sets the sampling time to satisfy (Equation 1).

\*3 : The compare time ( $T_c$ ) is the value of (Equation 2).

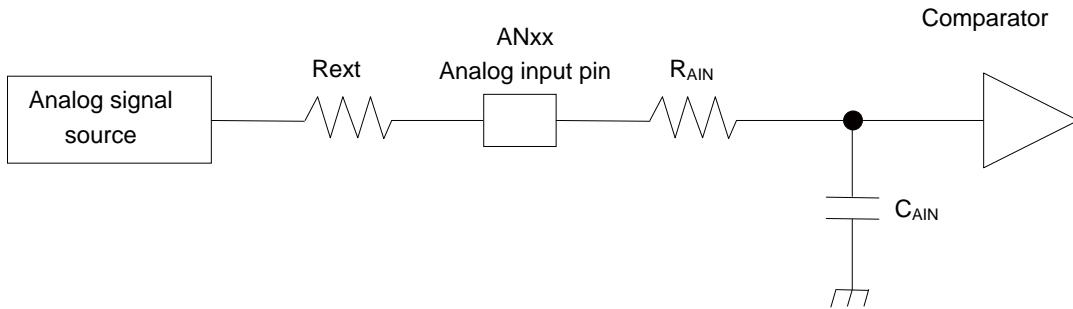

(Equation 1)  $T_s \geq (R_{AIN} + R_{ext}) \times C_{AIN} \times 9$

$T_s$  : Sampling time

$R_{AIN}$  : input resistor of A/D = 1.62 k $\Omega$  ch.0 to ch.7 at 4.5V  $\leq AV_{cc} \leq$  5.5V

input resistor of A/D = 1.58 k $\Omega$  ch.8 to ch.15 at 4.5V  $\leq AV_{cc} \leq$  5.5V

input resistor of A/D = 1.56 k $\Omega$  ch.16 to ch.23 at 4.5V  $\leq AV_{cc} \leq$  5.5V

input resistor of A/D = 2.35 k $\Omega$  ch.0 to ch.7 at 2.7V  $\leq AV_{cc} <$  4.5V

input resistor of A/D = 2.3 k $\Omega$  ch.8 to ch.15 at 2.7V  $\leq AV_{cc} <$  4.5V

input resistor of A/D = 2.25 k $\Omega$  ch.16 to ch.23 at 2.7V  $\leq AV_{cc} <$  4.5V

$C_{AIN}$  : input capacity of A/D = 9.5pF at 2.7V  $\leq AV_{cc} \leq$  5.5V

$R_{ext}$  : Output impedance of external circuit


(Equation 2)  $T_c = T_{cck} \times 14$

$T_c$  : Compare time

$T_{cck}$  : Compare clock cycle

### Definition of 12-bit A/D Converter Terms

- Resolution : Analog variation that is recognized by an A/D converter.
- Integral Nonlinearity : Deviation of the line between the zero-transition point (0b000000000000  $\longleftrightarrow$  0b000000000001) and the full-scale transition point (0b11111111110  $\longleftrightarrow$  0b11111111111) from the actual conversion characteristics.
- Differential Nonlinearity : Deviation from the ideal value of the input voltage that is required to change the output code by 1 LSB.

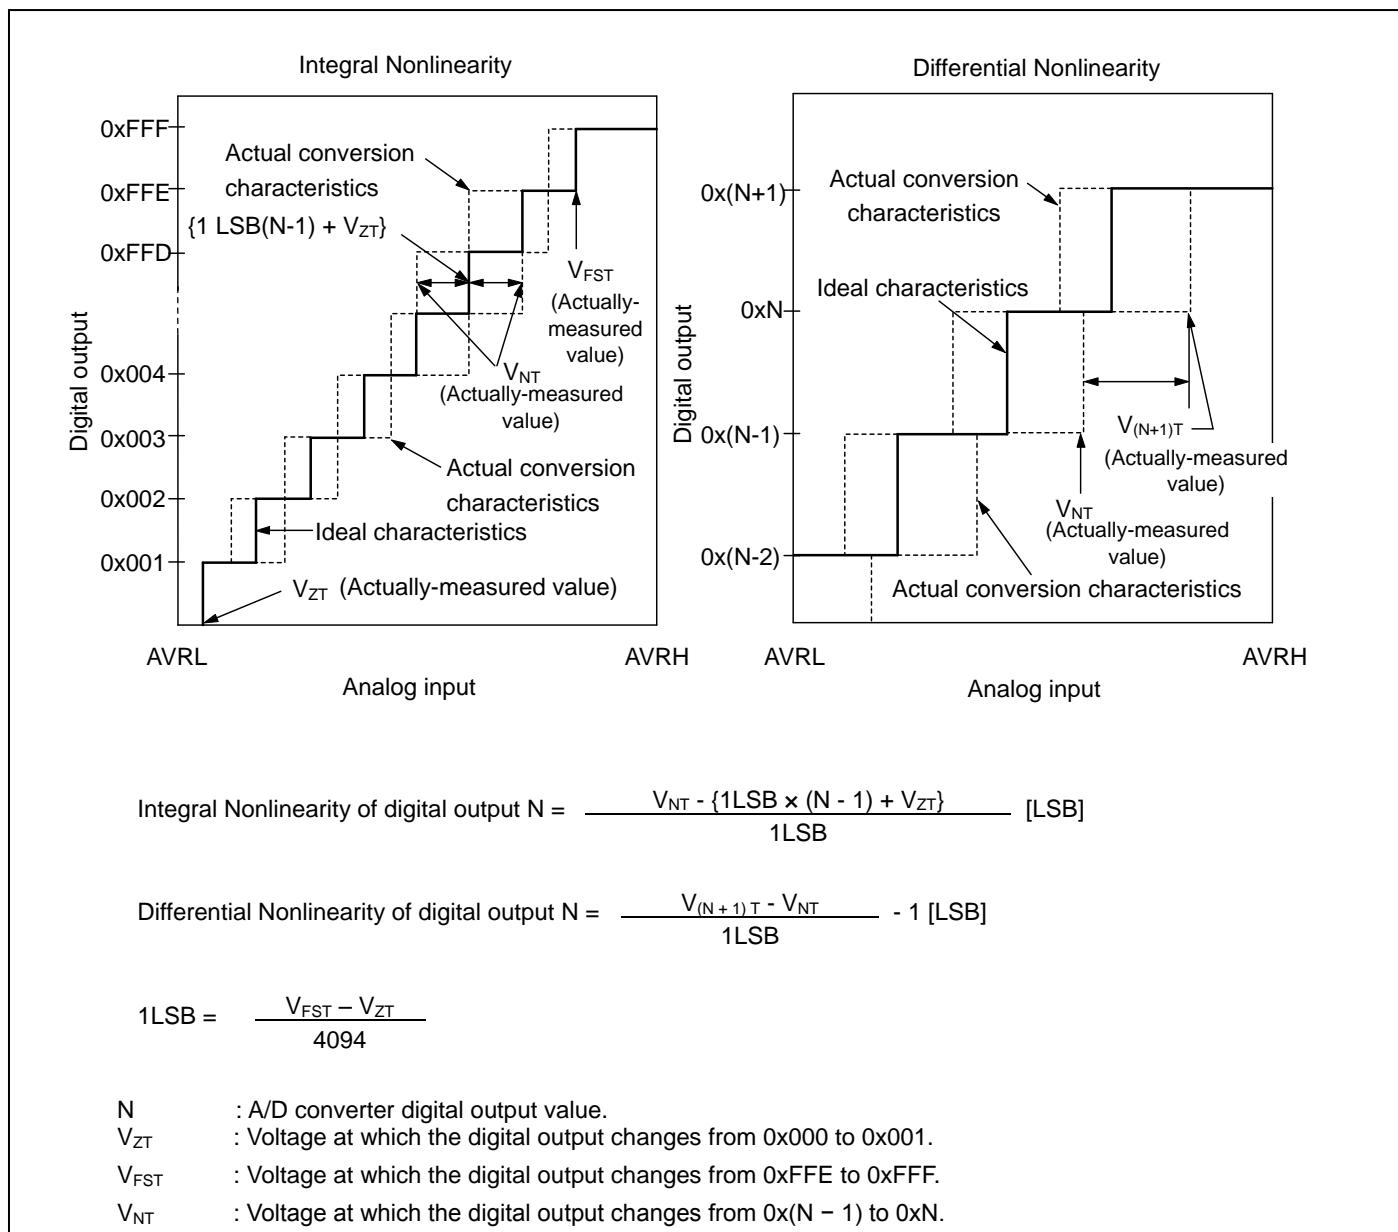

## 12.6 10-bit D/A Converter

### Electrical Characteristics for the D/A Converter

( $V_{CC} = AV_{CC} = 2.7V$  to  $5.5V$ ,  $V_{SS} = AV_{SS} = AV_{RL} = 0V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol	Pin name	Value			Unit	Remarks
			Min	Typ	Max		
Resolution	-	DAx	-	-	10	bit	
Conversion time	tc20		0.47	0.58	0.69	μs	Load 20pF
	tc100		2.37	2.90	3.43	μs	Load 100pF
Integral Nonlinearity <sup>*1</sup>	INL		- 4.0	-	+ 4.0	LSB	
Differential Nonlinearity <sup>*1,*2</sup>	DNL		- 0.9	-	+ 0.9	LSB	
Output Voltage offset	$V_{OFF}$		-	-	10.0	mV	Code is 0x000
			- 20.0	-	+ 5.4	mV	Code is 0x3FF
Analog output impedance	$R_o$		3.10	3.80	4.50	kΩ	D/A operation
			2.0	-	-	MΩ	D/A stop
Output undefined period	$t_R$		-	-	70	ns	

\*1 : No-load

\*2 : Generates the max current by the CODE about 0x200

## 12.7 Low-Voltage Detection Characteristics

### 12.7.1 Low-Voltage Detection Reset

(Ta = - 40°C to + 105°C)

Parameter	Symbol	Conditions	Value			Unit	Remarks
			Min	Typ	Max		
Detected voltage	VDL	SVHR <sup>*1</sup> = 00000	2.25	2.45	2.65	V	When voltage drops
Released voltage	VDH		2.30	2.50	2.70	V	When voltage rises
Detected voltage	VDL	SVHR <sup>*1</sup> = 00001	2.39	2.60	2.81	V	When voltage drops
Released voltage	VDH		Same as SVHR = 00000 value			V	When voltage rises
Detected voltage	VDL	SVHR <sup>*1</sup> = 00010	2.48	2.70	2.92	V	When voltage drops
Released voltage	VDH		Same as SVHR = 00000 value			V	When voltage rises
Detected voltage	VDL	SVHR <sup>*1</sup> = 00011	2.58	2.80	3.02	V	When voltage drops
Released voltage	VDH		Same as SVHR = 00000 value			V	When voltage rises
Detected voltage	VDL	SVHR <sup>*1</sup> = 00100	2.76	3.00	3.24	V	When voltage drops
Released voltage	VDH		Same as SVHR = 00000 value			V	When voltage rises
Detected voltage	VDL	SVHR <sup>*1</sup> = 00101	2.94	3.20	3.46	V	When voltage drops
Released voltage	VDH		Same as SVHR = 00000 value			V	When voltage rises
Detected voltage	VDL	SVHR <sup>*1</sup> = 00110	3.31	3.60	3.89	V	When voltage drops
Released voltage	VDH		Same as SVHR = 00000 value			V	When voltage rises
Detected voltage	VDL	SVHR <sup>*1</sup> = 00111	3.40	3.70	4.00	V	When voltage drops
Released voltage	VDH		Same as SVHR = 00000 value			V	When voltage rises
Detected voltage	VDL	SVHR <sup>*1</sup> = 01000	3.68	4.00	4.32	V	When voltage drops
Released voltage	VDH		Same as SVHR = 00000 value			V	When voltage rises
Detected voltage	VDL	SVHR <sup>*1</sup> = 01001	3.77	4.10	4.43	V	When voltage drops
Released voltage	VDH		Same as SVHR = 00000 value			V	When voltage rises
Detected voltage	VDL	SVHR <sup>*1</sup> = 01010	3.86	4.20	4.54	V	When voltage drops
Released voltage	VDH		Same as SVHR = 00000 value			V	When voltage rises
LVD stabilization wait time	T <sub>LVDW</sub>	-	-	-	6432 × t <sub>CYCP</sub> <sup>*2</sup>	μs	
LVD detection delay time	T <sub>LVDDL</sub>	-	-	-	200	μs	

\*1 : The SVHR bit of Low-voltage Detection Voltage Control Register (LVD\_CTL) is initialized to "00000" by low-voltage detection reset.

\*2 : t<sub>CYCP</sub> indicates the APB2 bus clock cycle time.

**12.7.2 Interrupt of Low-Voltage Detection**
 $(Ta = -40^{\circ}\text{C} \text{ to } +105^{\circ}\text{C})$ 

<b>Parameter</b>	<b>Symbol</b>	<b>Conditions</b>	<b>Value</b>			<b>Unit</b>	<b>Remarks</b>
			<b>Min</b>	<b>Typ</b>	<b>Max</b>		
Detected voltage	VDL	SVHI = 00011	2.58	2.80	3.02	V	When voltage drops
Released voltage	VDH		2.67	2.90	3.13	V	When voltage rises
Detected voltage	VDL	SVHI = 00100	2.76	3.00	3.24	V	When voltage drops
Released voltage	VDH		2.85	3.10	3.35	V	When voltage rises
Detected voltage	VDL	SVHI = 00101	2.94	3.20	3.46	V	When voltage drops
Released voltage	VDH		3.04	3.30	3.56	V	When voltage rises
Detected voltage	VDL	SVHI = 00110	3.31	3.60	3.89	V	When voltage drops
Released voltage	VDH		3.40	3.70	4.00	V	When voltage rises
Detected voltage	VDL	SVHI = 00111	3.40	3.70	4.00	V	When voltage drops
Released voltage	VDH		3.50	3.80	4.10	V	When voltage rises
Detected voltage	VDL	SVHI = 01000	3.68	4.00	4.32	V	When voltage drops
Released voltage	VDH		3.77	4.10	4.43	V	When voltage rises
Detected voltage	VDL	SVHI = 01001	3.77	4.10	4.43	V	When voltage drops
Released voltage	VDH		3.86	4.20	4.54	V	When voltage rises
Detected voltage	VDL	SVHI = 01010	3.86	4.20	4.54	V	When voltage drops
Released voltage	VDH		3.96	4.30	4.64	V	When voltage rises
LVD stabilization wait time	$T_{LVDW}$	-	-	-	$6432 \times t_{CYCP}^*$	$\mu\text{s}$	
LVD detection delay time	$T_{LVDDL}$	-	-	-	200	$\mu\text{s}$	

\* :  $t_{CYCP}$  indicates the APB2 bus clock cycle time.

## 12.8 Flash Memory Write/Erase Characteristics

### 12.8.1 Write / Erase time

( $V_{CC} = 2.7V$  to  $5.5V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Value		Unit	Remarks
	Typ	Max		
Sector erase time	Large Sector	1.1	2.7	s Includes write time prior to internal erase
	Small Sector	0.3	0.9	
Half word (16-bit) write time	20	317	μs	Not including system-level overhead time
Chip erase time	31	79	s	Includes write time prior to internal erase

\* : The typical value is immediately after shipment, the maximum value is guarantee value under 10,000 cycle of erase/write.

### 12.8.2 Write cycles and data hold time

Erase/write cycles (cycle)	Data hold time (year)	Remarks
1,000	20*	
10,000	10*	

\* : At average  $+85^{\circ}C$

## 12.9 Return Time from Low-Power Consumption Mode

### 12.9.1 Return Factor: Interrupt/WKUP

The return time from Low-Power consumption mode is indicated as follows. It is from receiving the return factor to starting the program operation.


#### Return Count Time

( $V_{CC} = 2.7V$  to  $5.5V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )


Parameter	Symbol	Value		Unit	Remarks
		Typ	Max*		
SLEEP mode	Ticnt	$t_{CYCC}$		ns	
High-speed CR TIMER mode, Main TIMER mode, PLL TIMER mode		43	83	$\mu s$	
Low-speed CR TIMER mode		310	620	$\mu s$	
Sub TIMER mode		534	724	$\mu s$	
RTC mode, STOP mode		278	479	$\mu s$	
Deep Standby RTC mode, Deep Standby STOP mode		298	543	$\mu s$	When RAM is off
		288	523	$\mu s$	When RAM is on

\* : The maximum value depends on the accuracy of built-in CR.

#### Operation example of return from Low-Power consumption mode (by external interrupt\*)

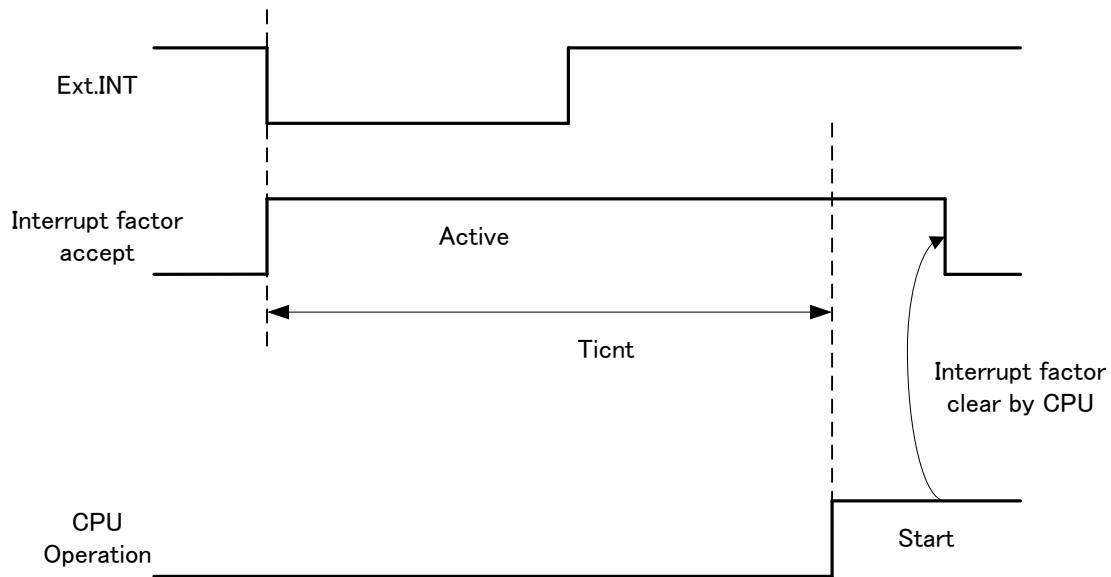

\* : External interrupt is set to detecting fall edge.

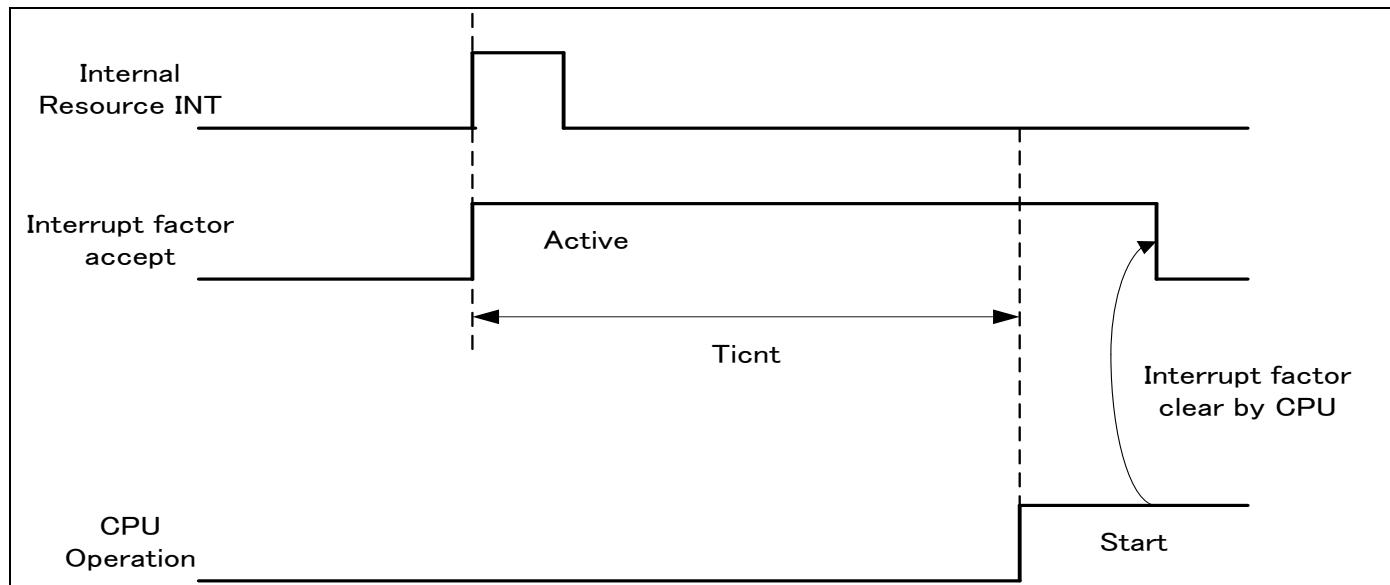**Operation example of return from Low-Power consumption mode (by internal resource interrupt\*)**


\* : Internal resource interrupt is not included in return factor by the kind of Low-Power consumption mode.

**Notes:**

- The return factor is different in each Low-Power consumption modes.  
See "Chapter 6: Low Power Consumption Mode" and "Operations of Standby Modes" in FM3 Family Peripheral Manual about the return factor from Low-Power consumption mode.
- When interrupt recovers, the operation mode that CPU recoveries depends on the state before the Low-Power consumption mode transition. See "Chapter 6: Low Power Consumption Mode" in "FM3 Family Peripheral Manual".

### 12.9.2 Return Factor: Reset

The return time from Low-Power consumption mode is indicated as follows. It is from releasing reset to starting the program operation.


#### Return Count Time


( $V_{CC} = 2.7V$  to  $5.5V$ ,  $T_a = -40^{\circ}C$  to  $+105^{\circ}C$ )

Parameter	Symbol	Value		Unit	Remarks
		Typ	Max*		
SLEEP mode	Trcnt	149	264	μs	
High-speed CR TIMER mode, Main TIMER mode, PLL TIMER mode		149	264	μs	
Low-speed CR TIMER mode		318	603	μs	
Sub TIMER mode		308	583	μs	
RTC/STOP mode		248	443	μs	
Deep Standby RTC mode, Deep Standby STOP mode		298	543	μs	When RAM is off
		288	523	μs	When RAM is on

\* : The maximum value depends on the accuracy of built-in CR.

#### Operation example of return from Low-Power consumption mode (by INITX)

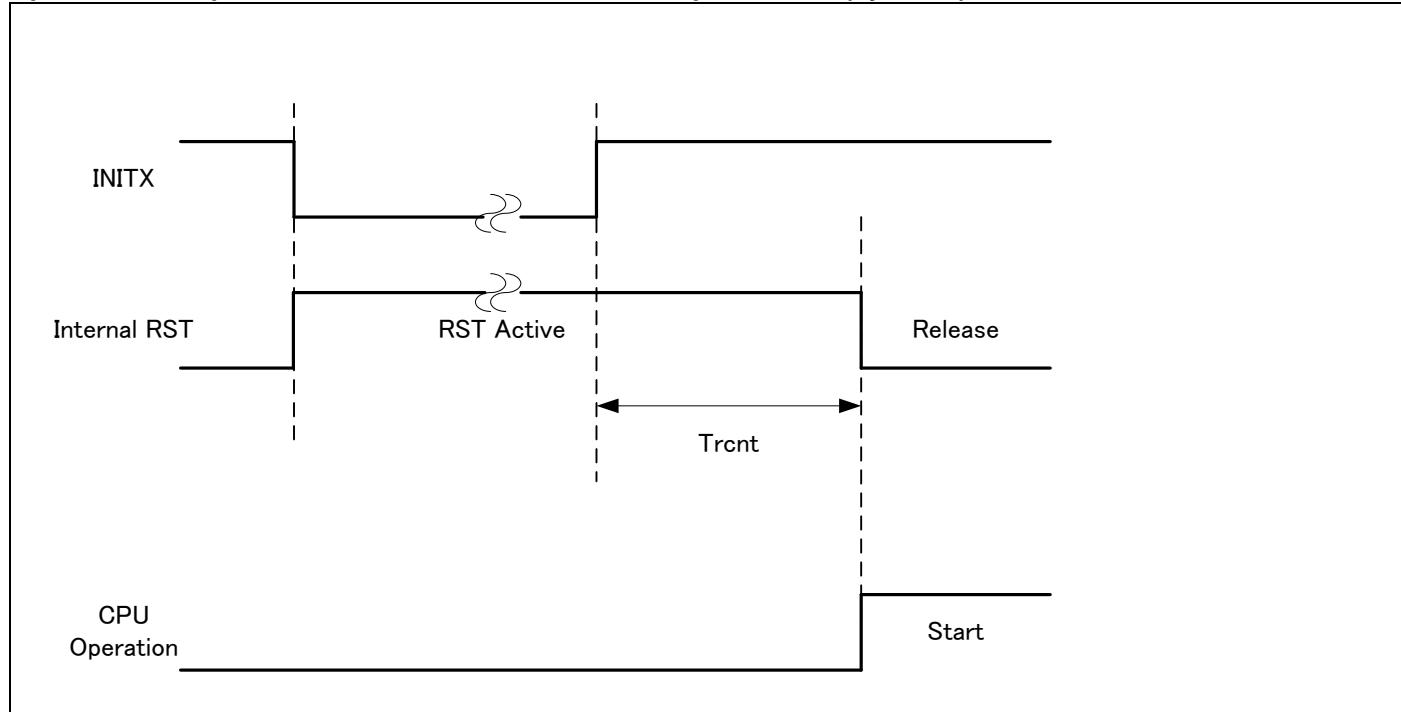

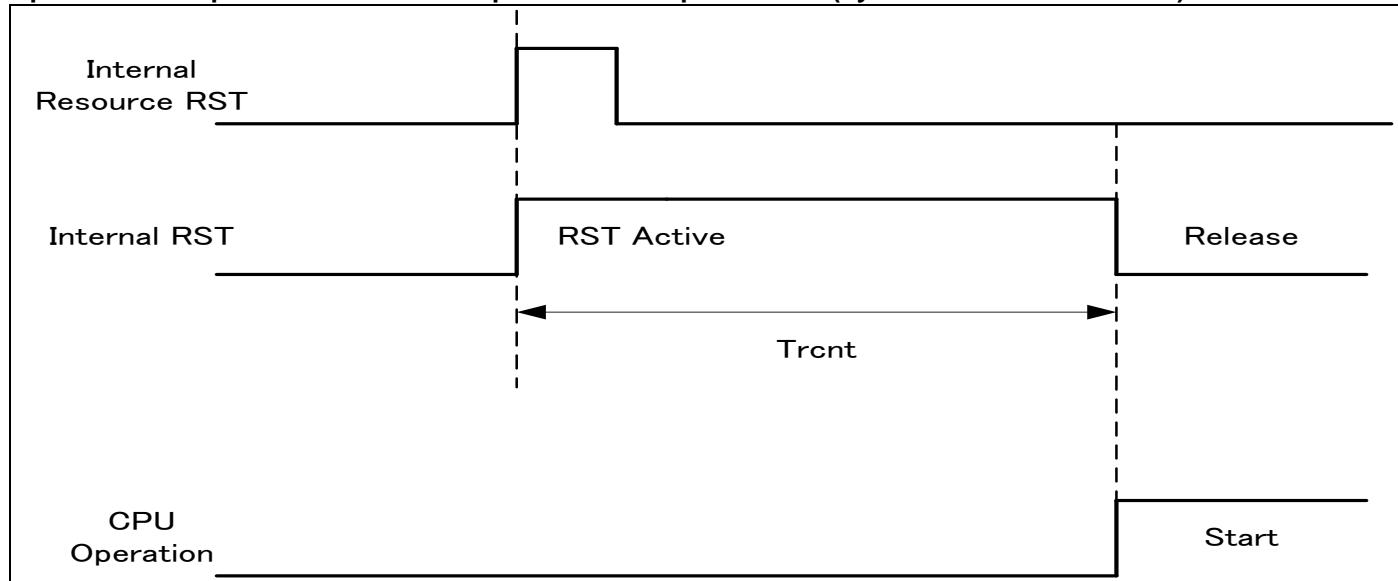**Operation example of return from low power consumption mode (by internal resource reset\*)**


\* : Internal resource reset is not included in return factor by the kind of Low-Power consumption mode.


**Notes:**


- The return factor is different in each Low-Power consumption modes.  
See "CHAPTER 6: Low Power Consumption Mode" and "Operations of Standby Modes" in FM3 Family Peripheral Manual.
- When interrupt recoveries, the operation mode that CPU recoveries depends on the state before the Low-Power consumption mode transition. See "Chapter 6: Low Power Consumption Mode" in "FM3 Family Peripheral Manual".
- The time during the power-on reset/low-voltage detection reset is excluded. See "12.4.7. Power-on Reset Timing in 12.4. AC Characteristics in 12. Electrical Characteristics" for the detail on the time during the power-on reset/low -voltage detection reset.
- When in recovery from reset, CPU changes to the high-speed CR run mode. When using the main clock or the PLL clock, it is necessary to add the main clock oscillation stabilization wait time or the main PLL clock stabilization wait time.
- The internal resource reset means the watchdog reset and the CSV reset.


### 13. Ordering Information


Part number	On-chip Flash memory	On-chip SRAM	Package	Packing
MB9BF428SAPMC-GE1	Main: 1 Mbyte Work: 64 Kbyte	160 Kbyte	Plastic • LQFP, 144-pin (0.5mm pitch) (FPT-144P-M08)	Tray
MB9BF429SAPMC-GE1	Main: 1.5 Mbyte Work: 64 Kbyte	192 Kbyte		
MB9BF428TAPMC-GE1	Main: 1 Mbyte Work: 64 Kbyte	160 Kbyte	Plastic • LQFP, 176-pin (0.5mm pitch) (FPT-176P-M07)	Tray
MB9BF429TAPMC-GE1	Main: 1.5 Mbyte Work: 64 Kbyte	192 Kbyte		
MB9BF428TABGL-GE1	Main: 1 Mbyte Work: 64 Kbyte	160 Kbyte	Plastic • FBGA, 192-pin (0.8mm pitch) (BGA-192P-M06)	Tray
MB9BF429TABGL-GE1	Main: 1.5 Mbyte Work: 64 Kbyte	192 Kbyte		


## 14. Package Dimensions

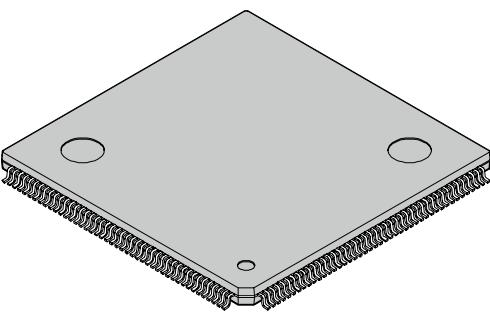
 (FPT-176P-M07)	Lead pitch	0.50 mm
	Package width × package length	24.0 × 24.0 mm
	Lead shape	Gullwing
	Sealing method	Plastic mold
	Mounting height	1.70 mm MAX
	Code (Reference)	P-LQFP-0176-2424-0.50

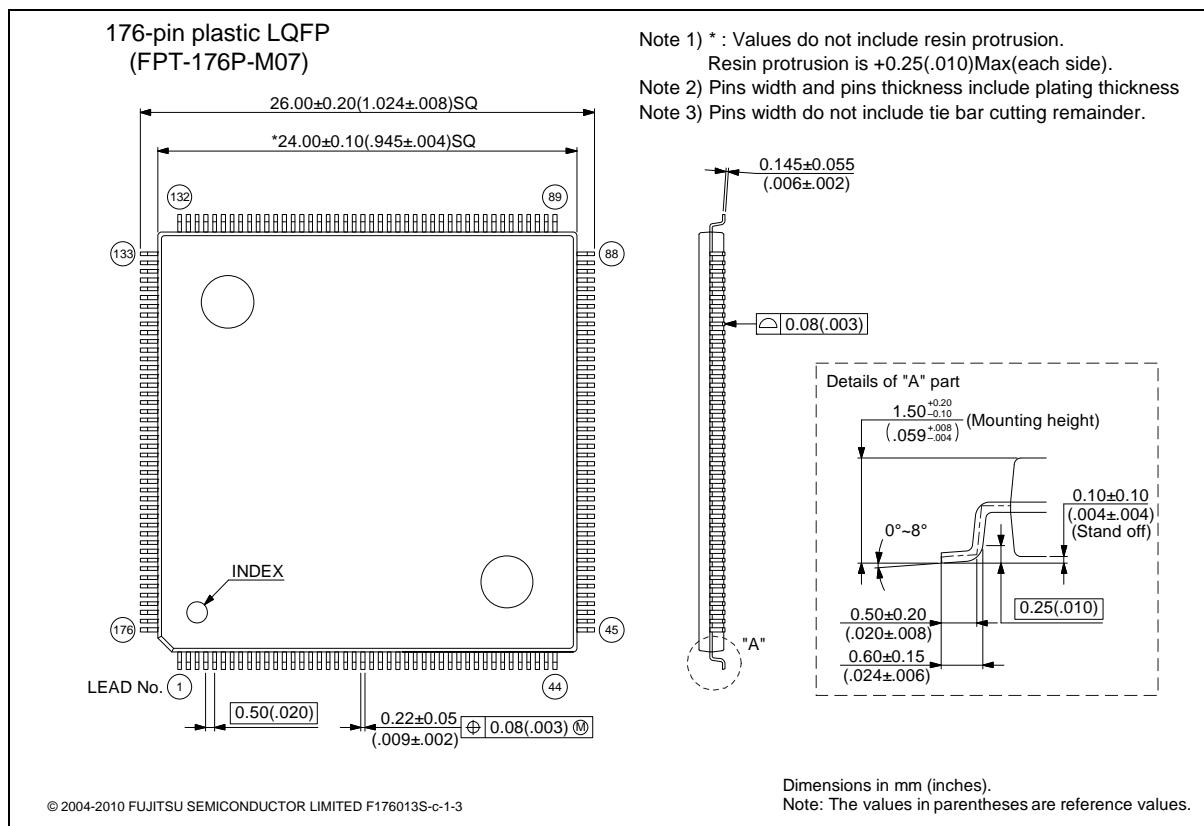

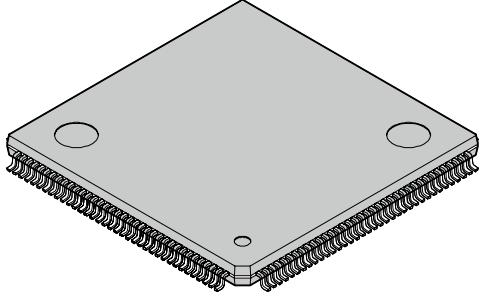144-pin plastic LQFP  (FPT-144P-M08)	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 5px;">Lead pitch</td><td style="padding: 5px;">0.50 mm</td></tr> <tr> <td style="padding: 5px;">Package width × package length</td><td style="padding: 5px;">20.0 × 20.0 mm</td></tr> <tr> <td style="padding: 5px;">Lead shape</td><td style="padding: 5px;">Gullwing</td></tr> <tr> <td style="padding: 5px;">Sealing method</td><td style="padding: 5px;">Plastic mold</td></tr> <tr> <td style="padding: 5px;">Mounting height</td><td style="padding: 5px;">1.70 mm MAX</td></tr> <tr> <td style="padding: 5px;">Weight</td><td style="padding: 5px;">1.20 g</td></tr> <tr> <td style="padding: 5px;">Code (Reference)</td><td style="padding: 5px;">P-LFQFP144-20x20-0.50</td></tr> </table>	Lead pitch	0.50 mm	Package width × package length	20.0 × 20.0 mm	Lead shape	Gullwing	Sealing method	Plastic mold	Mounting height	1.70 mm MAX	Weight	1.20 g	Code (Reference)	P-LFQFP144-20x20-0.50
Lead pitch	0.50 mm														
Package width × package length	20.0 × 20.0 mm														
Lead shape	Gullwing														
Sealing method	Plastic mold														
Mounting height	1.70 mm MAX														
Weight	1.20 g														
Code (Reference)	P-LFQFP144-20x20-0.50														

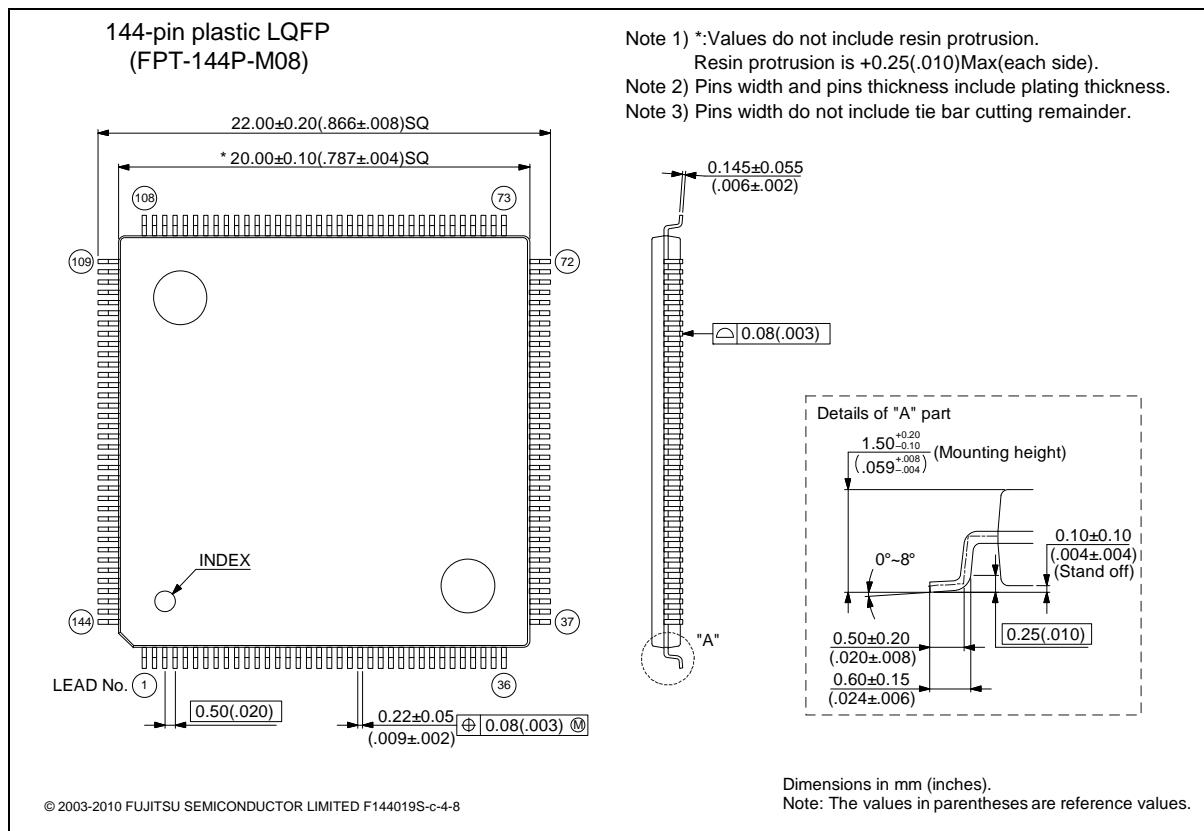

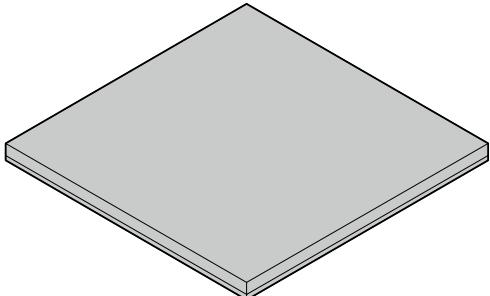192-ball plastic FBGA  (BGA-192P-M06)	Ball pitch 0.80 mm  Package width × package length 12.00 mm × 12.00 mm  Lead shape Ball  Sealing method Plastic mold  Mounting height 1.45 mm Max.  Weight 0.34 g

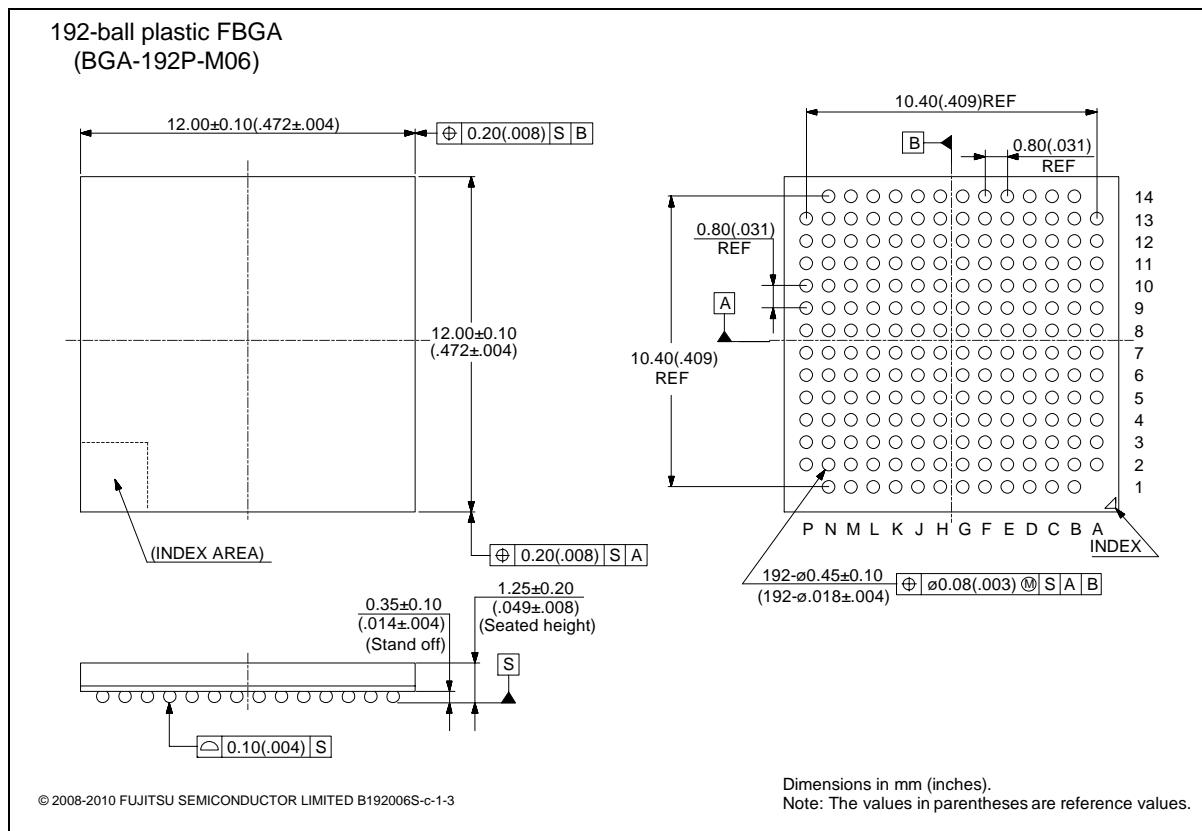

## 15. Major Changes

Spanion Publication Number: MB9B420TA\_DS706-00061

Page	Section	Change Results
Revision 0.1		
-	-	Initial release
Revision 0.2		
-	-	Company name and layout design change
Revision 1.0		
-	-	Preliminary → Full Production
2	Features External Bus Interface	Added the descriptions as follows Maximum area size : Up to 256 Mbytes
3	Features A/D Converter	Corrected conversion time
5	FEATURES Multi-function Timer	Corrected the channel count of "A/D activation compare"
8	Product Lineup Function	Added the footnote
63	Handling Devices Power supply pins	Added the description
66	Block Diagram	Corrected the figure
67	Memory Map Memory Map(1)	Corrected the Address of "External Device Area"
77	Electrical Characteristics 1. Absolute Maximum Ratings	Added the Item of "Input Voltage"
78	2. Recommended Operating Conditions	Added the footnote
79 - 81	3.DC Characteristics (1) Current Rating	Corrected the Condition Corrected the Value Corrected the Remarks Added the footnote
83	(2) Pin Characteristics	Added the Item of "Inputleak current"
88	4. AC Characteristics (6) Power-on Reset Timing	Revised the values of "Time until releasing Power-on reset" Corrected the figure Corrected the Glossary
107	(9) CSIO Timing Synchronous serial (SPI=1, SCINV=1)	Corrected the figure of "MS bit=1"
	External clock (EXT=1):asynchronous only	Corrected the figure
114	5.12-bit A/D Converter Electrical characteristics for the A/D converter	Corrected the Pins name AN00 - AN23 → ANxx Corrected the Min Vale of "Conversion time" Corrected the Min Vale of "Sampling time" Corrected the Min Value of "Compare clock cycle" Corrected the "State Transiton time to operation permission" Corrected the footnote
120	9. Electrical characteristics for the A/D converter (1) Write / Erase time	Revised the values of "TBD"
121	10. Return Time from Low-Power Consumption Mode (1) Return Factor: Interrupt/WKUP Return Count Time	Revised the values of "TBD"
123	(2) Return Factor: Reset Return Count Time	Revised the values of "TBD"
Revision 2.0		
-	-	Changed the series name. MB9B420T Series -> MB9B420TA Series
-	-	Changed the product name as follows. MB9BF428SA, MB9BF429SA, MB9BF428TA, MB9BF429TA
42 to 49	List of Pin Functions · List of pin functions	Added LIN to the description of SOTxx
56, 57	I/O Circuit Type	Added about +B input

Page	Section	Change Results
68	Memory Map Memory map(2)	Added the summary of Flash memory sector
77, 78	Electrical Characteristics 1. Absolute Maximum Ratings	Added the Clamp maximum current · Added about +B input
80, 81	Electrical Characteristics 3. DC Characteristics (1) Current rating	Changed the expression of condition Added Main TIMER mode current
88	Electrical Characteristics 4. AC Characteristics (4-1) Operating Conditions of Main PLL (4-2) Operating Conditions of Main PLL	Added the figure of Main PLL connection
101 to 108	Electrical Characteristics 4. AC Characteristics (7) CSIO/UART Timing	Modified from UART Timing to CSIO/UART Timing Changed from Internal shift clock operation to Master mode Changed from External shift clock operation to Slave mode
115	Electrical Characteristics 5. 12bit A/D Converter	Added the typical value of Integral Nonlinearity, Differential Nonlinearity, Zero transition voltage and Full-scale transition voltage
126	Ordering Information	Change to full part number

**NOTE:** Please see “Document History” about later revised information.

## Document History

Document Title: MB9B420TA Series 32-bit ARM® Cortex®-M3, FM3 Microcontroller

Document Number: 002-05663

Revision	ECN	Orig. of Change	Submission Date	Description of Change
**	-	TOYO	01/30/2015	Migrated to Cypress and assigned document number 002-05663. No change to document contents or format.
*A	5198504	TOYO	04/04/2016	Updated to Cypress format.

## Sales, Solutions, and Legal Information

### Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

### Products

ARM® Cortex® Microcontrollers

[cypress.com/arm](http://cypress.com/arm)

Automotive

[cypress.com/automotive](http://cypress.com/automotive)

Clocks & Buffers

[cypress.com/clocks](http://cypress.com/clocks)

Interface

[cypress.com/interface](http://cypress.com/interface)

Lighting & Power Control

[cypress.com/powerpsoc](http://cypress.com/powerpsoc)

Memory

[cypress.com/memory](http://cypress.com/memory)

PSoC

[cypress.com/psoc](http://cypress.com/psoc)

Touch Sensing

[cypress.com/touch](http://cypress.com/touch)

USB Controllers

[cypress.com/usb](http://cypress.com/usb)

Wireless/RF

[cypress.com/wireless](http://cypress.com/wireless)

### PSoC® Solutions

[psoc.cypress.com/solutions](http://psoc.cypress.com/solutions)

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#)

### Cypress Developer Community

[Community](#) | [Forums](#) | [Blogs](#) | [Video](#) | [Training](#)

### Technical Support

[cypress.com/go/support](http://cypress.com/go/support)

ARM and Cortex are the registered trademarks of ARM Limited in the EU and other countries.

© Cypress Semiconductor Corporation 2013-2016. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you under its copyright rights in the Software, a personal, non-exclusive, nontransferable license (without the right to sublicense) (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units. Cypress also grants you a personal, non-exclusive, nontransferable, license (without the right to sublicense) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely to the minimum extent that is necessary for you to exercise your rights under the copyright license granted in the previous sentence. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and Company shall and hereby does release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. Company shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit [cypress.com](http://cypress.com). Other names and brands may be claimed as property of their respective owners.