

RFM products are now Murata products.

### Ideal Front-End Filter for European Wireless Receivers

- Low-Loss, Coupled-Resonator Quartz Design
- Simple External Impedance Matching
- Complies with Directive 2002/95/EC (RoHS)



The RF1407D is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 868.60 MHz receivers. Receiver designs using this filter include superhet IF, direct conversion and superregen. Typical applications of these receivers are wireless remote-control and security devices operating in Europe under ETSI I-ETS 300 220, in Germany under FTZ 17 TR 2100, in the United Kingdom under DTI MPT 1340 (for automotive only), in France under PTT Specifications ST/PAA/TPA/AGH/ 1542, and in Scandinavia.

This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. Murata's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching (not included).

					0.0 × 0.0		
Characteristic		Sym	Notes	Minimum	Typical	Maximu m	Units
Center Frequency @ 25°C		f <sub>C</sub>	1, 2, 3		868.60		MHz
Minimum I.L. (868.210-868.99	0 MHz)		1, 3		3.0	4.2	dB
1dB Bandwidth 868.05-869.15	-45°C to +90°C		1	960			ki iz
	-25°C to +60°C		1	1000			kHz
Pass Bandwidth (relative to IL <sub>min</sub> )		BW <sub>3</sub>	1, 3	1200	1800		kHz
Rejection (relative to IL <sub>min</sub> )	10-700 MHz		1, 3	50	55		dB
	700-830 MHz			40	45		
	830-850 MHz			32	37		
	850-865.02 MHz			25	28		
	871-874.5 MHz			11	14		uв
	874.5-883 MHz			16	21		
	883-900 MHz			30	33		
	900-1000 MHz			40	45		
Temperature Coeff					0.032		ppm/°C <sup>2</sup>
Operating Temperature Range	1			-45		+90	°C
Impedance @ fc	Input Z <sub>IN</sub> = R <sub>IN</sub> II C <sub>IN</sub>	Z <sub>IN</sub>	1		117Ω II 3.7pf	•	
	Output Z <sub>OUT</sub> = R <sub>OUT</sub> II C <sub>OUT</sub>	Z <sub>OUT</sub>	1		117Ω    3.7pf		
Lid Symbolization (in addition to Lot and/or Date Codes)			505 // YWWS			1	
Standard Reel Quantity	7 Inch Reel		8	500 Pieces/Reel			
	13 Inch Reel		8	3000 Pieces/Reel			



#### NOTES:

- Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture which is connected to a 50  $\Omega$  test system with VSWR  $\leq$  1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f<sub>c</sub>. Note that insertion loss and bandwidth are dependent on the impedance 1. matching component values and quality.
- 2 The frequency  $f_c$  is defined as the midpoint between the 3dB frequencies.
- 3. 4.
- Where noted, specifications apply over the entire specified operating temperature range of -45°C to +90°C. Frequency aging is the change in fc with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing significantly in subsequent years. The design, manufacturing process, and specifications of this device are subject to change.
- 5.
- One or more of the following U.S. Patents apply: 4,54,488, 4,616,197, and others pending. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale. Tape and Reel Standard Per ANSI / EIA 481. 6. 7.
- 8.
- This product complies with directive 2002/95/EC of the European Parlament and of the Council of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. 9

# **RF1407D**

# 868.60 MHz **SAW Filter**




SM3838-8 Case 3.8 x 3.8


Rating		Value	Units
Input Power Level		+10	dBm
DC Voltage		12	VDC
Storage Temperature		-45 to +90	C°
Soldering Temperature	(10 seconds / 5 cycles max.)	260	C°

### **Electrical Connections**

Pin	Connection			
1	Input			
2	Ground			
3	Ground			
4	Case Ground			
5	Output			
6	Ground			
7	Ground			
8	Case Ground			

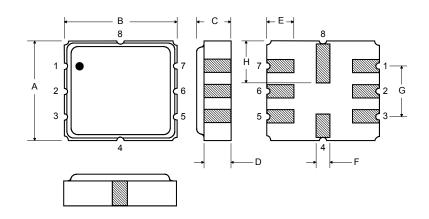

## Matching Circuit to $50 \Omega$

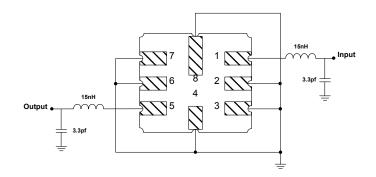

### **Case Dimensions**

Dimension	mm			Inches			
	Min	Nom	Max	Min	Nom	Max	
Α	3.6	3.8	4.0	0.14	0.15	0.16	
В	3.6	3.8	4.0	0.14	0.15	0.16	
С	1.00	1.20	1.40	0.04	0.05	0.055	
D	0.95	1.10	1.25	0.033	0.043	0.05	
E	0.90	1.0	1.10	0.035	0.04	0.043	
F	0.50	0.6	0.70	0.020	0.024	0.028	
G	2.39	2.54	2.69	0.090	0.100	0.110	
Н	1.40	1.75	2.05	0.055	0.069	0.080	