## SFH 225 FA



### Features:

- Especially suitable for applications of 880 nm
- Short-switching time (typ. 20 ns)
- 5 mm LED plastic package
- Also available on tape and reel
- The product qualification test plan is based on the guidelines of AEC-Q101-REV-C, Stress Test Qualification for Automotive Grade Discrete Semiconductors.

## Applications

- Photointerrupters
- IR remote control of hi-fi and TV sets, dimmers, remote controls of various equipment

## **Ordering Information**

Туре:	Photocurrent	Ordering Code		
	Ι <sub>Ρ</sub> [μΑ]			
	$\lambda$ = 870 nm, E <sub>e</sub> = 1 mW/cm <sup>2</sup> , V <sub>R</sub> = 5 V			
SFH 225 FA	34 (≥ 25)	Q62702P1051		



# Maximum Ratings ( $T_A = 25 \degree C$ )

Parameter	Symbol	Values	Unit
Operating and storage temperature range	T <sub>op</sub> ; T <sub>stg</sub>	-40 100	°C
Reverse voltage	V <sub>R</sub>	20	V
Total Power dissipation	P <sub>tot</sub>	150	mW
ESD withstand voltage (acc. to ANSI/ ESDA/ JEDEC JS-001 - HBM)	V <sub>ESD</sub>	2000	V


## Characteristics (T<sub>A</sub> = 25 °C)

Parameter		Symbol	Values	Unit
Photocurrent (V <sub>R</sub> = 5 V, E <sub>e</sub> = 1 mW/cm <sup>2</sup> , $\lambda$ = 870 nm)	(typ (min))	I <sub>P</sub>	34 (≥ 25)	μΑ
Wavelength of max. sensitivity	(typ)	$\lambda_{S max}$	900	nm
Spectral range of sensitivity	(typ)	λ <sub>10%</sub>	(typ) 740 1120	nm
Radiant sensitive area	(typ)	A	4.84	mm <sup>2</sup>
Dimensions of radiant sensitive area	(typ)	L×W	2.2 x 2.2	mm x mm
Half angle	(typ)	φ	± 60	0
Dark current (V <sub>R</sub> = 10 V)	(typ (max))	I <sub>R</sub>	2 (≤ 30)	nA
Spectral sensitivity of the chip $(\lambda = 870 \text{ nm})$	(typ)	S <sub>λ typ</sub>	0.65	A/W
Quantum yield of the chip $(\lambda = 870 \text{ nm})$	(typ)	η	0.93	Electro ns /Photon
Open-circuit voltage ( $E_e = 0.5 \text{ mW/cm}^2$ , $\lambda = 870 \text{ nm}$ )	(typ (min))	Vo	330 (≥ 250)	mV
Short-circuit current ( $E_e = 0.5 \text{ mW/cm}^2$ , $\lambda = 870 \text{ nm}$ )	(typ)	I <sub>SC</sub>	17	μA
Rise and fall time (V <sub>R</sub> = 5 V, R <sub>L</sub> = 50 Ω, $\lambda$ = 850 nm)	(typ)	t <sub>r</sub> , t <sub>f</sub>	0.02	μs
Forward voltage (I <sub>F</sub> = 100 mA, E = 0)	(typ)	V <sub>F</sub>	1.3	V
Capacitance (V <sub>R</sub> = 0 V, f = 1 MHz, E = 0)	(typ)	C <sub>0</sub>	48	pF
Temperature coefficient of Vo	(typ)	TCv	-2.6	mV / K




## Version 1.3

Parameter		Symbol	Values	Unit
Temperature coefficient of $I_{SC}$ ( $\lambda = 870 \text{ nm}$ )	(typ)	TC	0.1	% / K
Noise equivalent power ( $V_R = 10 V, \lambda = 870 nm$ )	(typ)	NEP	0.039	pW / Hz <sup>½</sup>
Detection limit (V <sub>R</sub> = 10 V, $\lambda$ = 870 nm)	(typ)	D*	5.6e12	cm x Hz <sup>½</sup> / W

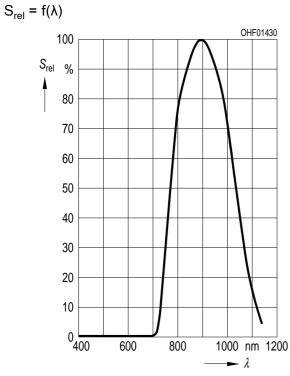


Relative Spectral Sensitivity <sup>1) page 9</sup>

Photocurrent / Open-Circuit Voltage 1) page 9

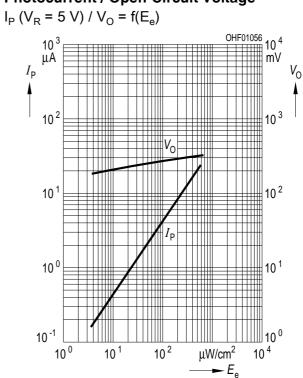





## **Power Consumption**

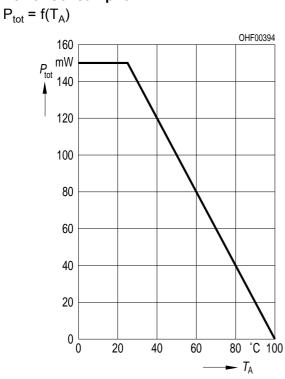


**Dark Current** <sup>1) page 9</sup>  $I_R = f(V_R), E = 0$ 

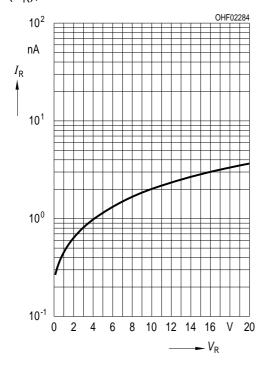

Dark Current <sup>1) page 9</sup>

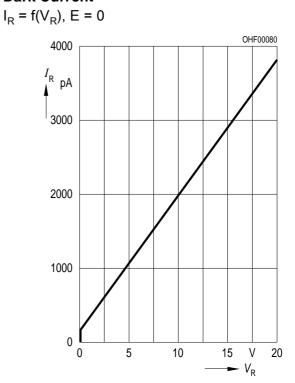


Capacitance  $^{1) page 9}$ C = f(V<sub>R</sub>), f = 1 MHz, E = 0

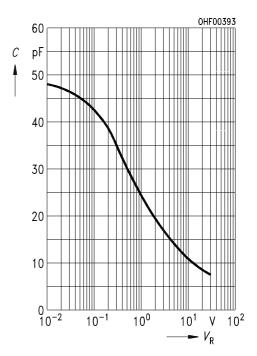




## Dark Current 1) page 9

 $I_R = f(T_A), V_R = 10 V, E = 0$ 

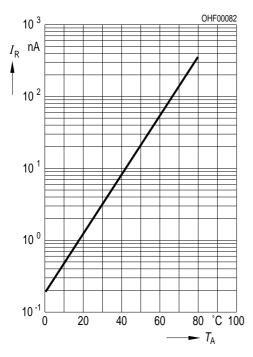


Directional Characteristics <sup>1) page 9</sup>  $S_{rel} = f(\phi)$ 

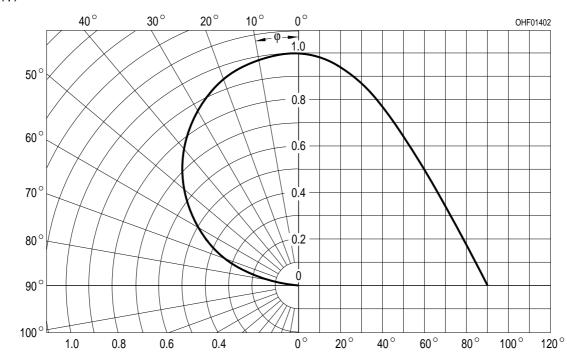



## Package Outline

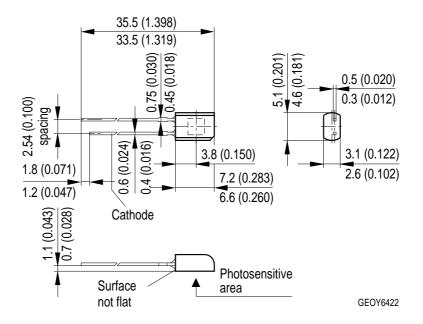

## Dimensions in mm (inch).

## Package

5mm Radial (T 1 ¾), Epoxy

### Approximate Weight:


0.1 g

### Note

Packing information is available on the internet (online product catalog).



## **Recommended Solder Pad**

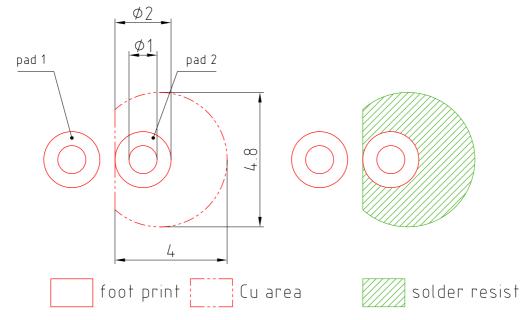


Dimensions in mm.

## Note:

pad 1: anode

## **TTW Soldering**

IEC-61760-1 TTW

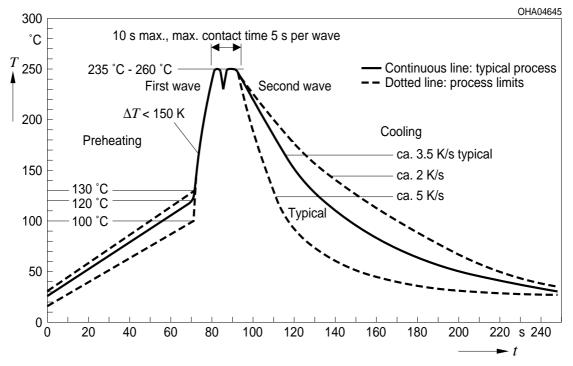



E062.3010.188-01

## Disclaimer

Language english will prevail in case of any discrepancies or deviations between the two language wordings.

#### Attention please!

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact our Sales Organization.

If printed or downloaded, please find the latest version in the Internet.

#### Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

**Components used in life-support devices or systems must be expressly authorized for such purpose!** Critical components\* may only be used in life-support devices\*\* or systems with the express written approval of OSRAM OS.

\*) A critical component is a component used in a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or the effectiveness of that device or system.

\*\*) Life support devices or systems are intended (a) to be implanted in the human body, or (b) to support and/or maintain and sustain human life. If they fail, it is reasonable to assume that the health and the life of the user may be endangered.



## Glossary

<sup>1)</sup> Typical Values: Due to the special conditions of the manufacturing processes of LED, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.



Published by OSRAM Opto Semiconductors GmbH Leibnizstraße 4, D-93055 Regensburg www.osram-os.com © All Rights Reserved.

EU RoHS and China RoHS compliant product

0

此产品符合欧盟 RoHS 指令的要求; 按照中国的相关法规和标准,不含有毒有害物质或元素。

