


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

| REVISION | | | |
|----------|-----------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| B | RoHS Compliancy | 06-01-06 | DP |
| | | | |
| | | | |

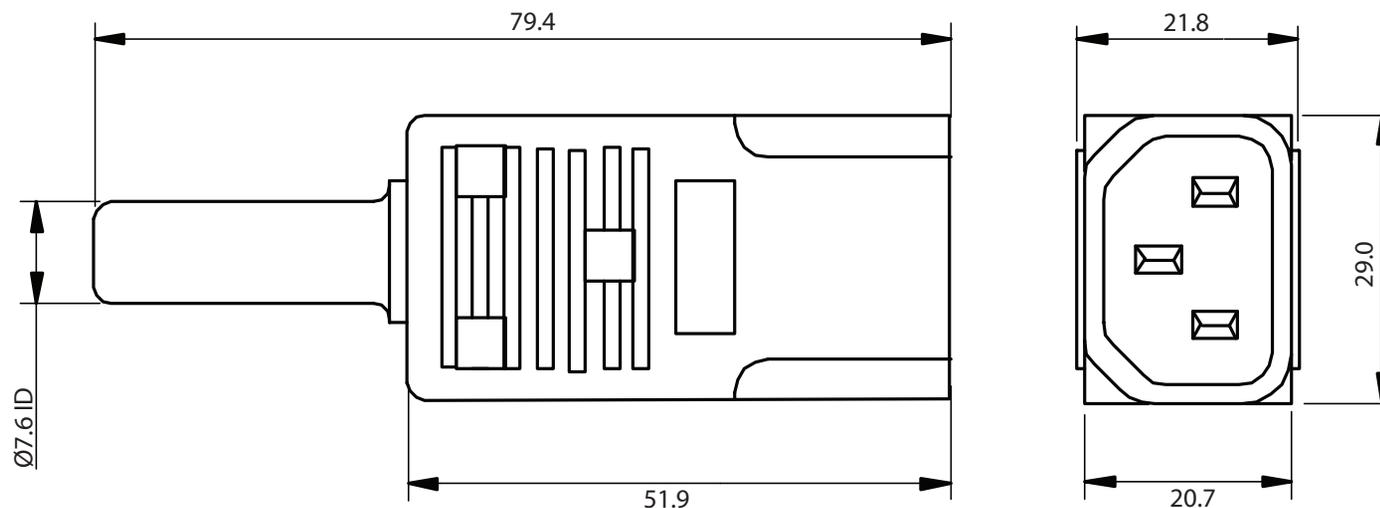

NOTES:

FOR USE WITH 18 AWG CORDAGE
 MAX. RATING: 10A 250V AC
 CONTACT RESISTANCE: < 10m OHM
 INSULATION RESISTANCE: > 1,000M OHM
 A.C. BREAKDOWN: POLE-POLE 6.5 kV POLE- ACCESSIBLE 6.5 kV
 OPERATING TEMPERATURE: -40°C TO +70°C
 WITHDRAWL FORCE: 10N(MIN), 50N(MAX)
 MATERIAL:
 MOULDING: NYLON, FLAMMABILITY RATING U.L. 94V-0
 CONTACTS: BRASS, NICKEL PLATED
 APPROVALS: UL, CSA, VDE
 RoHS COMPLIANT

CONTROLLED

| Dim range (mm) | Tolerance +/- (mm) | Qualtek Electronics Corp. PPC DIVISION | | |
|----------------|--------------------|---|----------------|-----------------|
| | | Part Number: | 712-00/00 | RoHS Compliant |
| 0-1 | 0.15 | Description: REWIRABLE PLUG ASSEMBLY | | |
| 1-6 | 0.20 | | | |
| 6-18 | 0.30 | | UNIT: mm | REV. B |
| 18-50 | 0.50 | Drawn / Date | Checked / Date | Approved / Date |
| 50-120 | 0.70 | B.ZHANG 04-11-02 | 04-11-02 | JJH / 04-11-02 |
| 120-250 | 0.90 | | | |
| 250-500 | 1.20 | | | |