


## 11.5kW 3-Phase Switched PDU, 200/220/230/240V Outlets (24 C13, 6 C19), IEC309 16/20A Red, 360-415V input, 0U, TAA

MODEL NUMBER: PDU3XVSR6G20

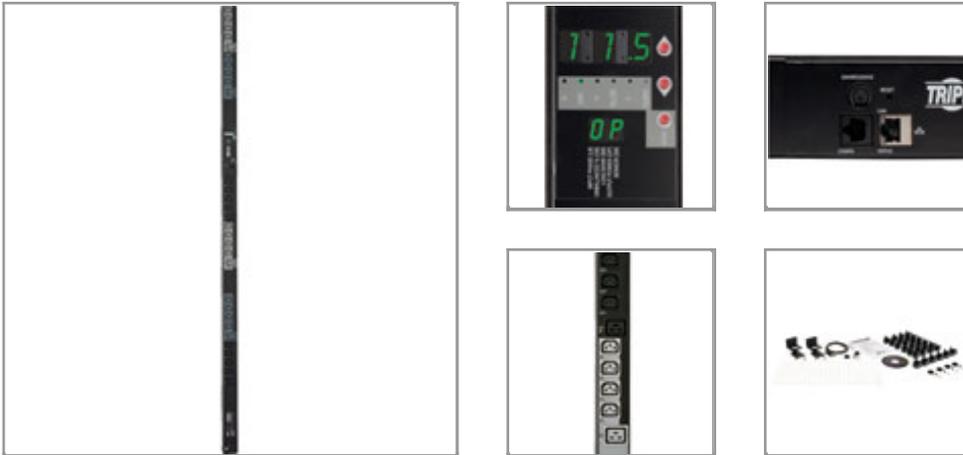

### Description

Tripp Lite 3 phase Switched PDU / Power Distribution Unit offers advanced network control and monitoring with the ability to turn on, turn off, recycle or lock-out power to each individual receptacle, monitor site electrical conditions and remotely monitor output power consumption per-phase or per-receptacle. PowerAlert interface supports remote control and custom notification of user-specified conditions via email, secure web, SNMP, Telnet or SSH interface. Individually switched outlets can be controlled in real-time to remotely reboot unresponsive network hardware, or be custom programmed for user-defined power-up and power-down sequences to ensure proper startup of interdependent IT systems and prevent inrush-related overloads as network equipment is first energized. Unused PDU outlets can be electronically locked off to prevent the connection of unauthorized hardware. PDU output current consumption in amps per-phase or per-receptacle can be displayed locally via visual meter or remotely via web/network interface to warn of potential overloads before critical IT mains or branch breakers trip. Highly accurate current metering offers +/-1% billing-grade current monitoring and recording ability for each output phase, breakered load bank and individual outlet.

### Features

- 11.5kW Switched 360/380/400/415V input 200/220/230/240V output PDU with built-in web/network interface
- IEC309 16/20A Red (3P+N+E) 360-415V 3 phase input with 6 ft. / 1.8m line cord
- 0U, 70 inch / 178cm vertical form factor
- 30 switched 200-240V outlets (24 C13, 6 C19) in 3 single phase load banks
- Supports power-on, power-off or reboot of each outlet on a real-time or programmable basis
- Enables reboot of locked equipment, custom power-on/power-off sequences, load shedding of optional loads and disabling unused outlets
- Network interface provides PDU control and data regarding input voltage and load levels per-outlet and per-phase
- Built-in local digital display and remote web/network interface reports detailed voltage, amperage and kilowatt output values per outlet and per phase with additional reporting options for power unbalance percentage, IP address and sensor based temperature and humidity data (requires [ENVIROSENSE](#) sensor)

### Highlights

- Switched 11.5kW 3-Phase 360/380/400/415V input 200/220/230/240V output PDU
- Reports voltage, frequency & load per-outlet and per phase via ethernet interface
- 1% billing-grade accuracy; Digital display reports detailed status and loading information
- 70in / 1778mm 0U vertical format; Toolless button-mount installation
- 24 C13 & 6 C19 single phase outlets; Plug-lock cable retention inserts keep power cables secure
- IEC309 16/20A Red (3P+N+E) 3 phase input; 6 ft. / 1.8m line cord
- TAA Compliant

### Package Includes

- Switched, vertical rackmount PDU with pre-installed mounting buttons
- 24 C13/C14 and 6 C19/C20 Plug-lock cable retention inserts
- Spare installation buttons (2 9mm / 4 6mm), Mounting brackets
- Configuration cable
- Owner's manual



- In-rack environmental reporting with optional **ENVIROSENSE** temperature / humidity sensor and rack access notification with up to 4 optional **SRSWITCH** door sensors
- Local display supports electronic 180 degree display rotation for overhead or under-floor input cable orientation
- Supports user-specified alarm notification thresholds
- DHCP/Manual configuration support
- 10/100 Mbps auto-sensing
- Real-time clock backup maintains the time of day and date even if the PDU is unpowered
- Tiered access privileges allow an administrator and a guest to login via web browser
- Alert notifications via email or SNMP traps offer immediate event notification
- Firmware upgrade ability supports future product enhancements
- Supports HTTP, HTTPS, PowerAlert Network Management System, SMTP, SNMPv1, SNMPv2, SNMPv3, Telnet, SSH, FTP, DHCP, BootP, NTP protocols
- Fully compatible with FREE PowerAlert Network Management System / NMS Software
- Included set of Plug-lock inserts keep C14 and C20 power cords solidly connected to PDU outlets
- Toolless mounting supported in button-mount compatible racks, plus nut-and-bolt mounting brackets for other mounting applications (set of 2 9mm buttons pre-installed, 2 9mm and 4 6mm spare buttons included)
- Federal Trade Agreements Act / TAA Compliant for GSA Schedule purchases

## Specifications

OVERVIEW	
PDU Type	Switched
OUTPUT	
Output Capacity Details	11.5kW (415/240V), 11.1kW (400/230V), 10.5kW (380/220V) total capacity; 16A max per output phase (L1-L2, L2-L3, L3-L1); 16A max per C19 outlet; 12A (10A CE) max per C13 outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(24) C13; (6) C19
Output Nominal Voltage	220 (380V input); 230 (400V input); 240 (415V input)
Overload Protection	n/a
INPUT	
PDU Input Voltage	380; 400; 415
Recommended Electrical Service	16A 400/230V with IEC309 16A Red (3P+N+E) outlet; 20A 415/240V with IEC309 20A Red (3P+N+E) outlet
Maximum Input Amps	16
PDU Plug Type	IEC-309 16/20A RED (3P+N+E)
Input Cord Length (ft.)	6
Input Cord Length (m)	1.8
Input Phase	3-Phase



<b>USER INTERFACE, ALERTS &amp; CONTROLS</b>	
Reported Load Segments	Reports input current per phase (L1, L2, L3), plus output current for each output load bank (16A balanced max per B1-B3) and individual output receptacle (1-30); Outlets are color-coded and labelled for phase and load bank identification; L1-N feeds black outlets (B1); L2-N feeds dark-gray outlets (B2); L3-N feeds light-gray outlets (B3)
Front Panel LCD Display	Large digital display reports Amperage, Kilowatts, Voltage, Unbalance percentage, Temperature* and Humidity* information (*requires ENVIROSENSE option); Small digital display provides detail on the measurement the large display is reporting: Input-phase (L#), Load bank (B#), Sensor (S#), Outlet (##), Load unbalance % (UB), Output power (OP)
Front Panel LEDs	Set of 6 LEDs identify the value displayed on the large digital display: Amperage (A), Kilowatts (kW), Voltage (V), Unbalance percentage (%UB), Temperature (T), Humidity (%RH); One additional LED for each output receptacle offers power availability information: GREEN (Power ON, load bank capacity <80%), YELLOW (Power ON, load bank capacity >80%), RED (Power OFF/undervoltage), RED FLASHING (Power OFF/breaker trip)
Switches	Set of UP/DOWN arrow buttons scroll through available Input, Bank, Power, Load balance and Sensor options; Additional MODE button advances the LEDs to view the next measurement
<b>PHYSICAL</b>	
Shipping Dimensions (hwd / in.)	6.9 x 9.7 x 75.9
Shipping Dimensions (hwd / cm)	17.5 x 24.6 x 192.8
Shipping Weight (lbs.)	21.3
Shipping Weight (kg)	9.6
Unit Dimensions (hwd / in.)	70 x 2.17 x 2.86
Unit Dimensions (hwd / cm)	177.8 x 5.51 x 7.3
Unit Weight (lbs.)	14.5
Unit Weight (kg)	6.6
Material of Construction	Metal
Form Factors Supported	Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks
PDU Form Factor	0U; Vertical
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	32 to 122F (0C to 50C)
Storage Temperature Range	5 to 140F (-15C to 60C)
Relative Humidity	5% to 95% non-condensing
Operating Elevation (ft.)	0-10,000
Operating Elevation (m)	0-3000
<b>CERTIFICATIONS</b>	
Certifications	Tested to UL60950-1 (USA), CSA (Canada), NOM (Mexico), CE (EN 60950-1), CE / FCC Class A (Emissions), RoHS (Hazardous Substances), TAA Compliant
<b>WARRANTY</b>	



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
[www.tripplite.com](http://www.tripplite.com)

Product Warranty Period (Worldwide)	2-year limited warranty
-------------------------------------	-------------------------

© 2017 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:

<https://www.tripplite.com/products/product-certification-agencies>