

SI-8000Y Series**Current Mode Control Step-down Switching Mode****■Features**

- Compact (equivalent to TO220) full-mold package
- Output current: 8.0 A
- High efficiency: 86%
- Built-in reference oscillator (130 kHz)
- Built-in drooping-type-overcurrent protection and thermal protection circuits
- Built-in soft start circuit (Output ON/OFF available)
- Low current consumption during off

■Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Input Voltage	V _{IN}	45	V
Power Dissipation	P _{D1}	20.8(With infinite heatsink)	W
Junction Temperature	T _j	-30 to +150	°C
Storage Temperature	T _{stg}	-40 to +150	°C
Thermal Resistance (Junction to Case)	θ _{j-c}	6	°C/W
Thermal Resistance (Junction to Ambient Air)	θ _{j-a}	66.7	°C/W

■Applications

- AV equipment
- OA equipment
- Gaming equipment
- Onboard local power supplies

■Recommended Operating Conditions


Parameter	Symbol	Ratings			Unit
		SI-8010Y		SI-8050Y	
Input Voltage Range	V _{IN}	8 or V _O +3* to 43		8 to 43	V
Output Voltage Range	V _O	1 to 15		5	V
Output Current Range	I _O		0 to 8.0		A
Operating Junction Temperature Range	T _{jop}		-30 to +135		°C
Operating Temperature Range	T _{op}		-30 to +85		°C

*: The minimum value of the input voltage range is 8 V or V_O + 3V, whichever is higher.

■Electrical Characteristics


Parameter	Symbol	Ratings						Unit
		SI-8010Y*			SI-8050Y			
min.	typ.	max.	min.	typ.	max.			
Output Voltage (Reference voltage for SI-8010Y)	V _{O(VREF)}	0.98	1.00	1.02	4.90	5.00	5.10	V
Temperature Coefficient of Output Voltage (Reference voltage temperature coefficient for SI-8010Y)	ΔV _O /ΔT(ΔV _{REF} /ΔT)	Conditions	V _{IN} =30V, I _O =0.1A		V _{IN} =30V, I _O =0.1A			mV/°C
Efficiency	η	86			86			%
Oscillation Frequency	f _o	130			130			kHz
Line Regulation	ΔV _{OLINE}	30	90		30	90		mV
Load Regulation	ΔV _{OLOAD}	Conditions	V _{IN} =10 to 43V, I _O =3A		V _{IN} =10 to 43V, I _O =3A			mV
Overcurrent Protection Starting Current	I _S	8.1			8.1			A
Quiescent Circuit Current	I _Q	8			8			mA
EN/SS Pin*	I _{Q(OFF)}	200	500		200	500		μA
Outflow Current at Low Voltage	I _{SSL}	10	30		10	30		μA
Low Level Voltage	V _{SSL}		0.5			0.5		V
Error Amplifier Voltage Gain	A _{EA}	300			300			V/V
Error Amplifier Transformer Conductance	G _{EA}	800			800			μA/V
Current Sense Amplifier Impedance	1/G _C	0.16			0.16			V/A
Maximum ON Duty	D _{MAX}	92			92			%
Minimum ON Time	D _{MIN}	200			200			nsec

*: R₁=8kΩ, R₂=2kΩ when T_a=25°C and V_O=5V

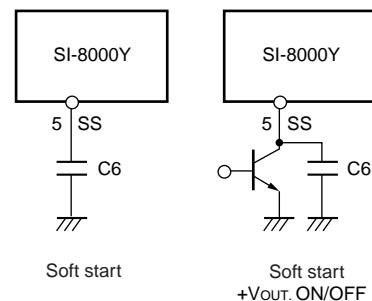

External Dimensions (TO220F-7)

(Unit : mm)

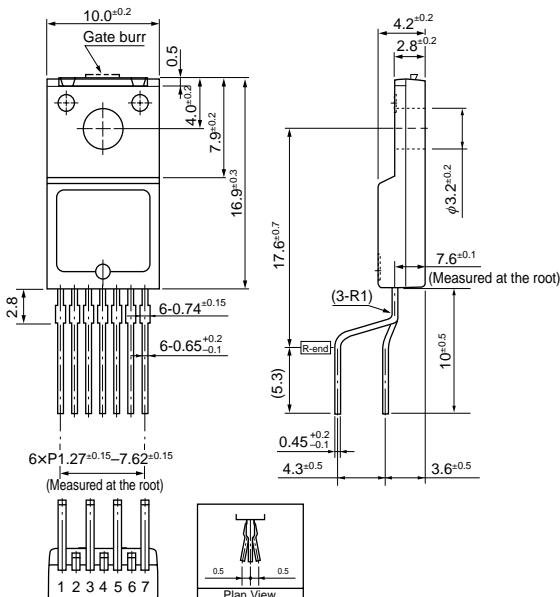

Pin Assignment

- ① BS
- ② SW
- ③ VIN
- ④ GND
- ⑤ COMP
- ⑥ FB
- ⑦ EN/SS


Plastic Mold Package Type

Flammability: UL94V-0



Product Mass: Approx. 2.3g

Block Diagram

SI-8010Y

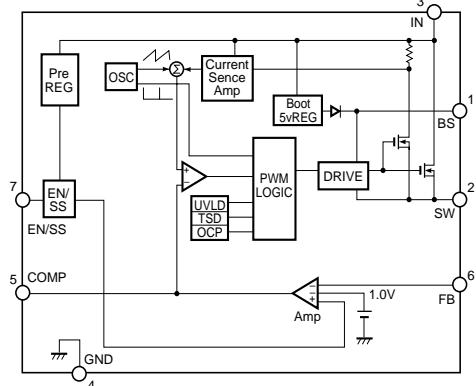


SI-8050Y

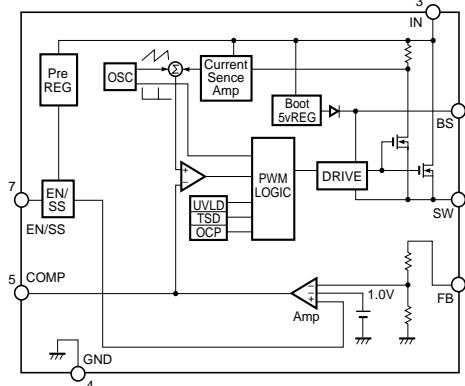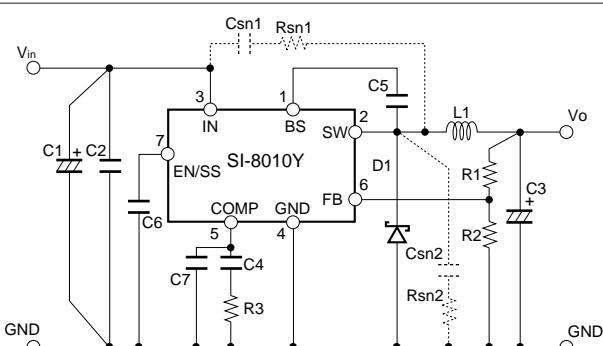**Typical Connection Diagram**

SI-8010Y

C1:2200 μ F/50V
C2:4.7 μ F/50V
C3:470 μ F/25V
C4:1200pF¹
C5:0.22 μ F/50V
C7:680pF¹
L1:47 μ H
D1:FMW-2156 (Sanken)
R1:8k Ω ¹
R2:2k Ω
R3:39k Ω ¹

Csn1,2=2200pF (When Vin>40V)
Rsn1,2=10 Ω (When Vin>40V)

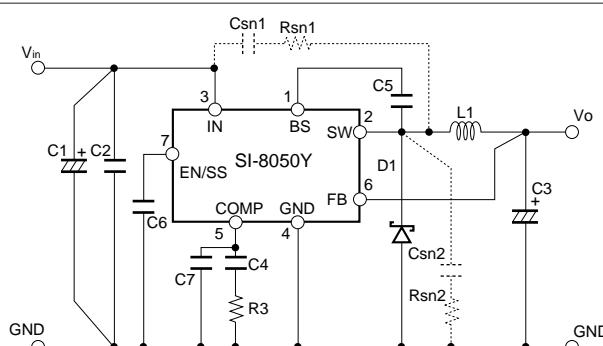

SI-8050Y

C1:2200 μ F/50V
C2:4.7 μ F/50V
C3:470 μ F/25V
C4:1200pF
C5:0.22 μ F/50V
C7:680pF
L1:56 μ H
D1:FMW-2156 (Sanken)
R3:39k Ω

*1: When Vo=5V