

### Is Now Part of



# ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <a href="https://www.onsemi.com">www.onsemi.com</a>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo



November 2014

## FFA60UP20DN 60 A, 200 V, Ultrafast Dual Diode

### **Features**

- Ultrafast Recovery,  $T_{rr}$  = 32 ns (@  $I_F$  = 30 A)
- Max. Forward Voltage, V<sub>F</sub> = 1.15 V (@ T<sub>C</sub> = 25°C)
- Reverse Voltage: V<sub>RRM</sub> = 200 V
- Avalanche Energy Rated
- RoHS Compliant

### **Applications**


- · Power Switching Circuits
- Output Rectifiers
- Free-Wheeling Diodes
- SMPS
- · Welder
- UPS


### Description

The FFA60UP20DN is an ultrafast diode with low forward voltage drop and rugged UIS capability. This device is intended for use as freewheeling and clamping diodes in a variety of switching power supplies and other power switching applications. It is specially suited for use in switching power supplies and industrial applications as Welder and UPS application.

### **Pin Assignments**







1. Anode 2. Cathode 3. Anode

### Absolute Maximum Ratings (per diode) T<sub>C</sub>=25°C unless otherwise noted

Symbol	Parameter	Rating	Unit
V <sub>R</sub>	DC Blocking Voltage	200	V
$V_{RRM}$	Peak Repetitive Reverse Voltage	200	V
$V_{RWM}$	Working Peak Reverse Voltage	200	V
I <sub>F(AV)</sub>	Average Rectified Forward Current @ T <sub>C</sub> = 100°C	30	Α
I <sub>FSM</sub>	Non-repetitive Peak Surge Current 60Hz Single Half-Sine Wave	300	Α
T <sub>J,</sub> T <sub>STG</sub>	Operating Junction and Storage Temperature	- 65 to +175	°C

### **Thermal Characteristics**

Symbol	Parameter	Rating	Unit
$R_{\theta JC}$	Maximum Thermal Resistance, Junction to Case	1.4	°C/W

### **Package Marking and Ordering Information**

Part Number	Top Mark	Package	Packing Method	Reel Size	Tape Width	Quantity
FFA60UP20DNTU	F60UA60DN	TO-3P	Tube	N/A	N/A	30

### Electrical Characteristics (per diode) T<sub>C</sub>=25 °C unless otherwise noted

Symbol	Parameter			Тур.	Max.	Unit
V <sub>F</sub> *	Maximum Instantaneous Forward Voltage					
	I <sub>F</sub> = 30 A	T <sub>C</sub> = 25 °C	-	-	1.15	V
	I <sub>F</sub> = 30 A	T <sub>C</sub> = 100 °C	-	-	1.0	
I <sub>R</sub> *	R * Maximum Instantaneous Reverse Current					
	@ rated V <sub>R</sub>	$T_C = 25  ^{\circ}C$ $T_C = 100  ^{\circ}C$	-	-	10	μΑ
		T <sub>C</sub> = 100 °C	-	-	100	
t <sub>rr</sub>	Reverse Recovery Time		-	32	-	ns
I <sub>rr</sub>	Reverse Recovery Current		-	2.4	-	Α
$Q_{rr}$	Reverse Recovery Charge		-	38.4	-	nC
	$(I_F = 30 \text{ A}, di_F/dt = 200 \text{ A/}\mu\text{s}, V_R = 130 \text{ V})$					
t <sub>rr</sub>	Maximum Reverse Recovery Time		-	-	40	ns
	$(I_F = 1 \text{ A}, di_F/dt = 100 \text{ A/}\mu\text{s})$					
W <sub>AVL</sub>	Avalanche Energy (L=40 mH)		2	-	-	mJ

<sup>\*</sup> Pulse Test: Pulse Width=300µs, Duty Cycle=2%

### **Test Circuit and Waveforms**

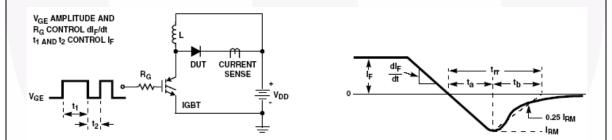


Figure 1. Diode Reverse Recovery Test Circuit & Waveform

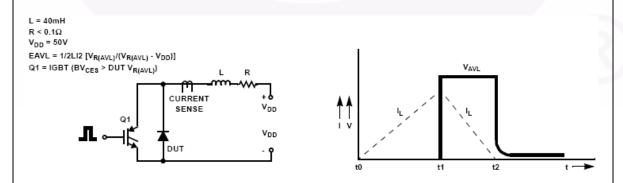


Figure 2. Unclamped Inductive Switching Test Circuit & Waveform

# **Typical Characteristics**




Figure 3. Typical Forward Voltage Drop vs. Forward Current




Figure 5. Typical Junction Capacitance




Figure 7. Typical Reverse Recovery Current vs. di<sub>E</sub>/dt




Figure 4. Typical Reverse Current vs. Reverse Voltage




Figure 6. Typical Reverse Recovery Time vs. di<sub>F</sub>/dt




Figure 8. Forward Current Derating Curve

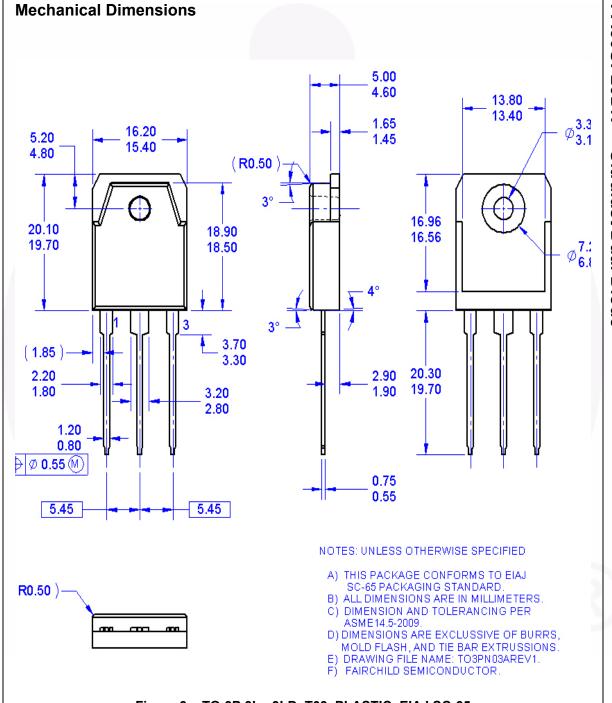


Figure 9. TO-3P 3L - 3LD, T03, PLASTIC, EIAJ SC-65

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

http://www.fairchildsemi.com/package/packageDetails.html?id=PN\_TT3P0-003.





#### **TRADEMARKS**

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

ntended to be an exhaustive list of all surfaceupower™

AccuPower™

Awinda®

FRF

AX-CAP®\*

BlitSiC™

Gree

Build it Now™

Gree

CorePLUS™

CorePOWER™

CROSSVOLT™

CTL™

CTL™

CULTENT Logic™

Intel

ISOI

Current Transfer Logic™
DEUXPEED®
Dual Cool™
EcoSPARK®
EfficentMax™
ESBC™

Fairchild®
Fairchild Semiconductor®
FACT Quiet Series™
FACT®
FAST®
FastvCore™
FETBench™
FPS™

F-PFS™ FRFET® Global Power Resource<sup>SM</sup> GreenBridge™ Green FPS™

Green FPS™ e-Series™
Gmax™
GTO™
IntelliMAX™

ISOPLANAR™
Marking Small Speakers Sound Louder
and Better™

MegaBuck™ MICROCOUPLER™ MicroFET™ MicroPak™

MicroPak2™
MicroPak2™
MillerDrive™
MotionMax™
MotionGrid®
MTi®
MVN®
MVN®
mWSaver®
OptoHiT™

® PowerTrench® PowerXS™

Programmable Active Droop™

QFĒT®
QS™
Quiet Series™
RapidConfigure™

Saving our world, 1mW/W/kW at a time™ SignalWise™

SmartMax™
SMART START™
Solutions for Your

Solutions for Your Success™ SPM®

SPM<sup>®</sup>
STEALTH™
SuperFET<sup>®</sup>
SuperSOT™-3
SuperSOT™-6
SuperSOT™-8
SupreMOS<sup>®</sup>
SyncFET™
Sync-Lock™

SYSTEM ®\*
GENERAL
TinyBoost®
TinyBuck®
TinyCalc™
TinyLogic®
TiNYOPTO™
TinyPOWer™
TinyPWM™
TinyPWM™
TinyWire™
TranSiC™
TriFault Detect™
TRUECURRENT®\*

µSerDes™

SerDes\*
UHC®
Ultra FRFET™
UniFET™
VOX™
VisualMax™
VoltagePlus™
XS™
Xsens™
du實™

\*Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR WEBSITE AT <a href="http://www.fairchildsemi.com">http://www.fairchildsemi.com</a>. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

#### LIFE SUPPORT POLICY

EAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used here in:

- Life support devices or systems are devices or systems which, (a) are
  intended for surgical implant into the body or (b) support or sustain life,
  and (c) whose failure to perform when properly used in accordance with
  instructions for use provided in the labeling, can be reasonably
  expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.Fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handing and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

#### PRODUCT STATUS DEFINITIONS

#### **Definition of Terms**

Datasheet Identification Product Status		Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev. 171

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative