
THIS DRAWING AND THE INFORMATION SET FORTH HEREON ARE THE PROPERTY OF TYCO ELECTRONICS CORPORATION AND ARE TO BE HELD IN TRUST AND CONFIDENCE. PUBLICATION, DUPLICATION, DISCLOSURE OR USE FOR ANY PURPOSE NOT EXPRESSLY AUTHORIZED IN WRITING BY TYCO ELECTRONICS CORPORATION IS PROHIBITED.

 REVISION

 REV
 DESCRIPTION
 DATE
 APPROVED

 A
 INITIAL RELEASE PER DCR# R050444
 DEC/2/05
 M.HIGGY

If this document is printed it becomes uncontrolled. Check for the latest revision.

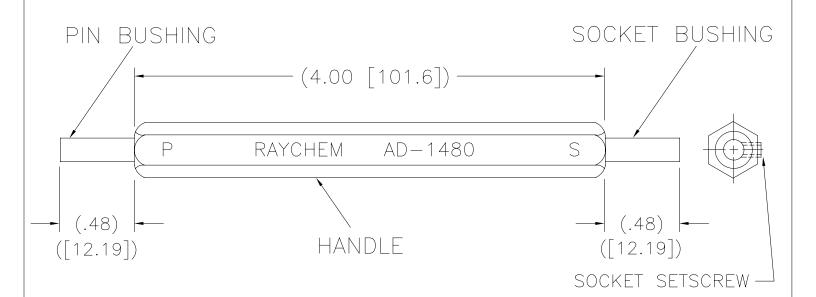

NOTES:

- 1. FOR TERMINATION INSTRUCTIONS AND APPLICATIONS SEE ENGINEERING STANDARD (ES-61199).
- 2. MATERIAL: <u>HANDLE:</u> HEX ALUMINUM 6061-T651 PER ASTM B221, FINISH: CLEAR ANODIZED

PIN AND SOCKET BUSHING:

HOUSING: 303 STAINLESS STEEL PER ASTM A484

INNER STOP: BRASS 360 1/2 HARD PER ASTM B16/16M

SCREW: 4-40 UNC-2B SOCKET SETSCREW, STAINLESS STEEL

SPECIFICATION CONTROL DRAWING

© 2005 Tyco Electronics Corporation.

All rights reserved

| ITEM | QTY. | PART NO | | DWG OR SPEC I | | | NO | NO DESCRIPTION | | | | |
|---|------------|---------|------------------|---------------|----------------|---------------------------|------------|----------------|--|-------|---------|--|
| | PARTS LIST | | | | | | | | | | | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES. METRIC DIMENSIONS ARE IN BRACKETS. DECIMAL TOLERANCES .XXX ± .005 [.13 mm] .XX ± .01 [.25 mm] .X ± | | | 20.0110/111 | | DATE NOV/2 | 28/05 | | etronies | TYCO ELECTRONIC 300 Constitution Menlo Park, CA. | Drive | Raychem | |
| | | | M.HIGGY MATERIAL | | DATE NOV/28/05 | | TITLE | | | | | |
| ANGLE T .X ± | OLERANCE | | FINISH | | | | FIXTURE | | | | | |
| CAD FILE | | | | ANGLE | | SIZE A | cage code: | DWG. NO. | AD- | 1480 | A | |
| | R050444 | 1.DWG | PROJECTION L | | | DO NOT SCALE THIS DRAWING | | | SHEET 1 OF 1 | | | |