




NOTE: Maximum recommended tightening torque for STELLA-FRAME-WHT is 0,4Nm

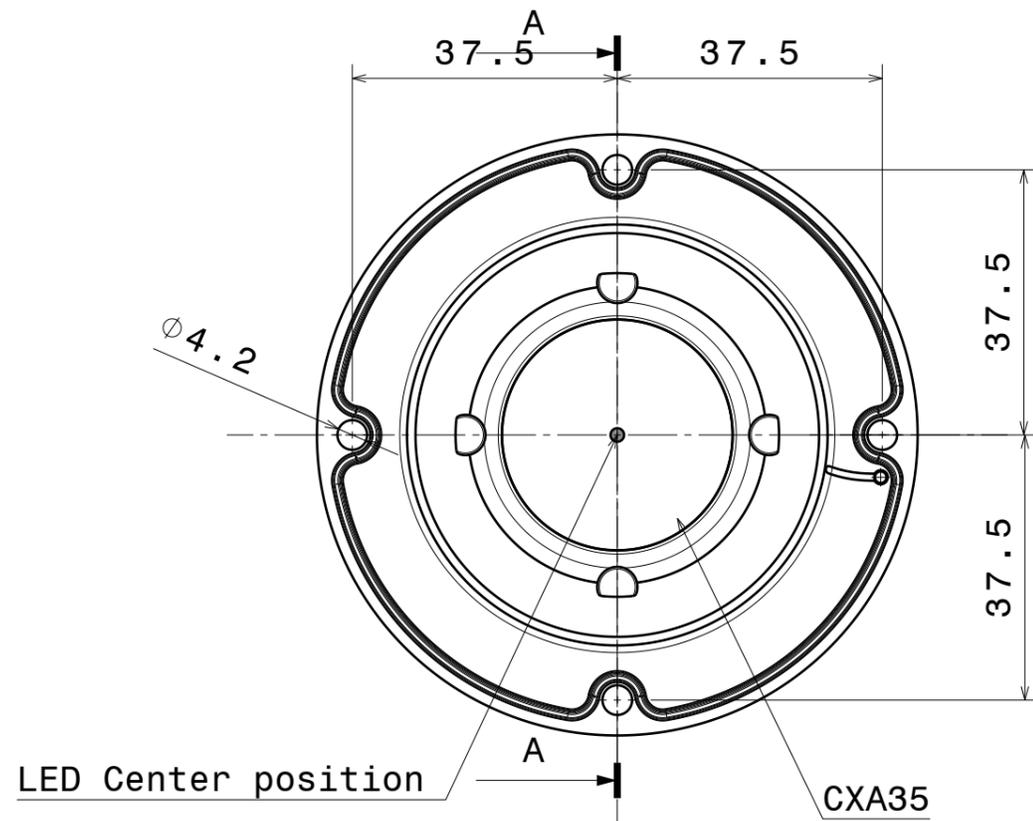


Bottom view

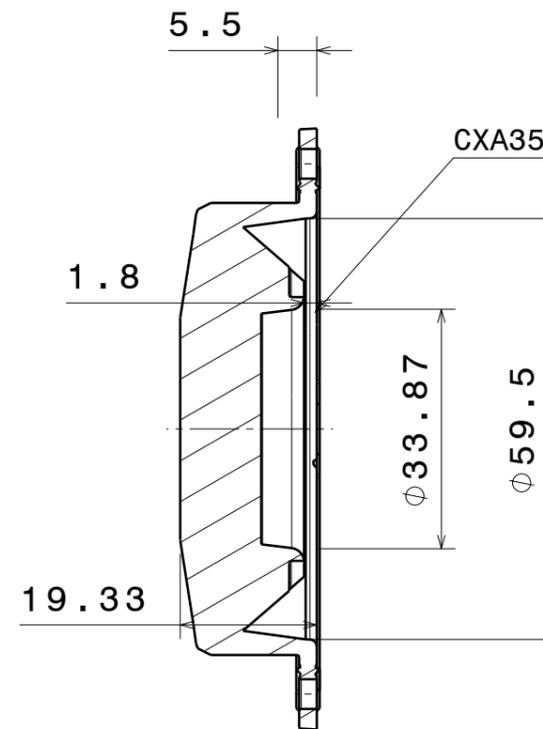

Section view A-A

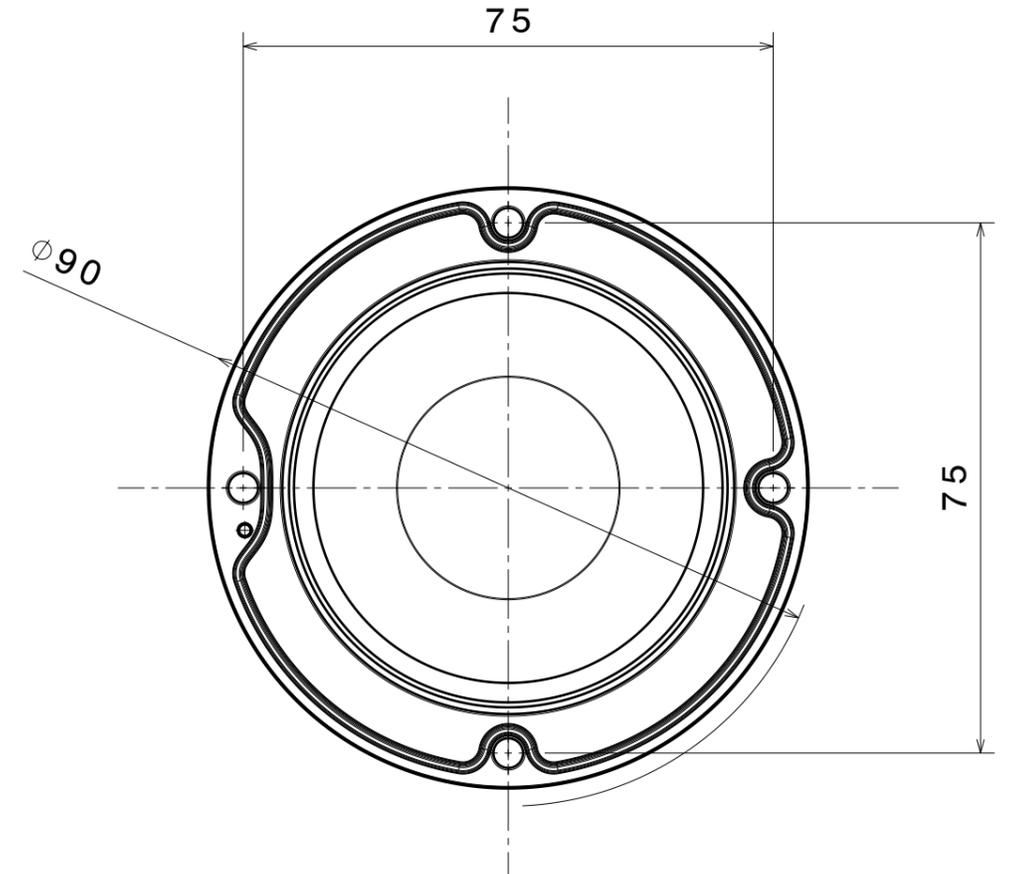

Front view

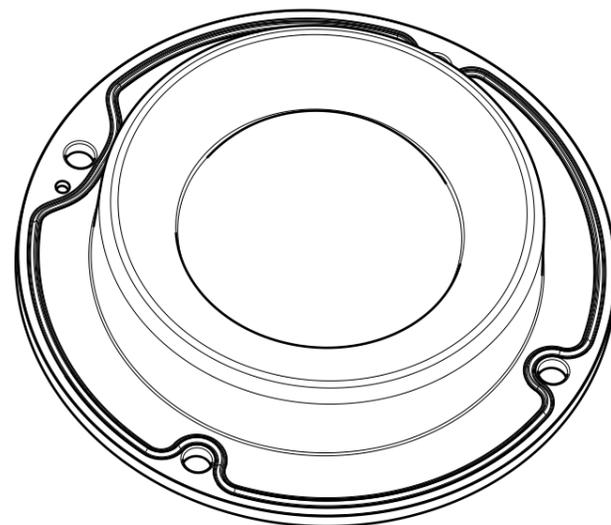

Isometric view

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	F14021	STELLA-HB	Optical grade LSR	
	F14252	STELLA-FRAME-WHT	PA66GF30	white

Tolerances if not otherwise shown  
According to DIN ISO 2768-1  
Linear measures: class V  
Please note that due to the elasticity of products made of silicone actual measured values may vary, and therefore typical tolerance values may not be applied.



Ledil Oy  
Salorankatu 10  
FIN 24240 SALO  
Finland

THIRD ANGLE PROJECTION:

DRAWING TITLE  
FN15186\_STELLA-HB

This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy."

SIZE PART NUMBER  
A3 FN15186

SCALE 1:1 WEIGHT 56,32 g SHEET 1/1