

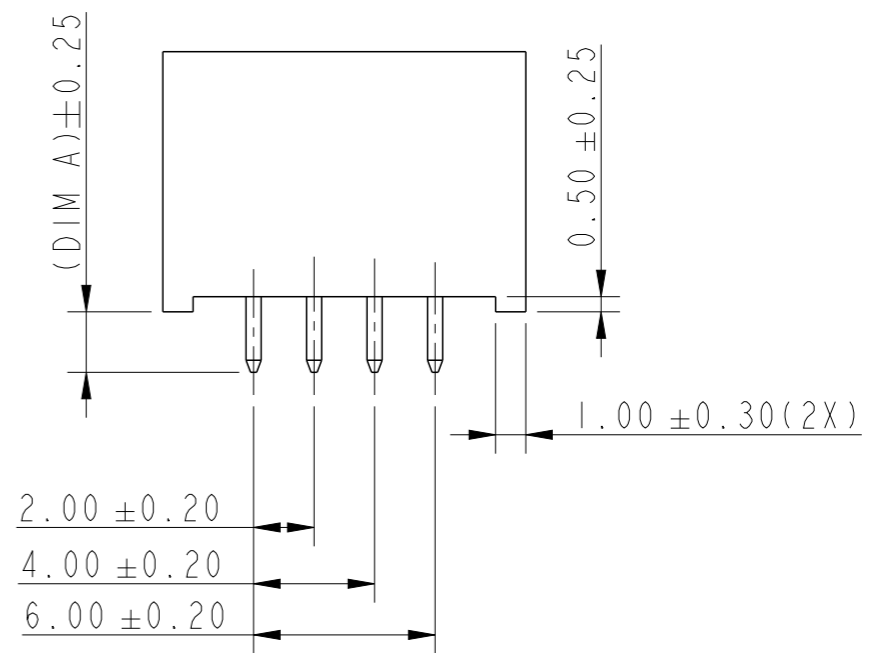
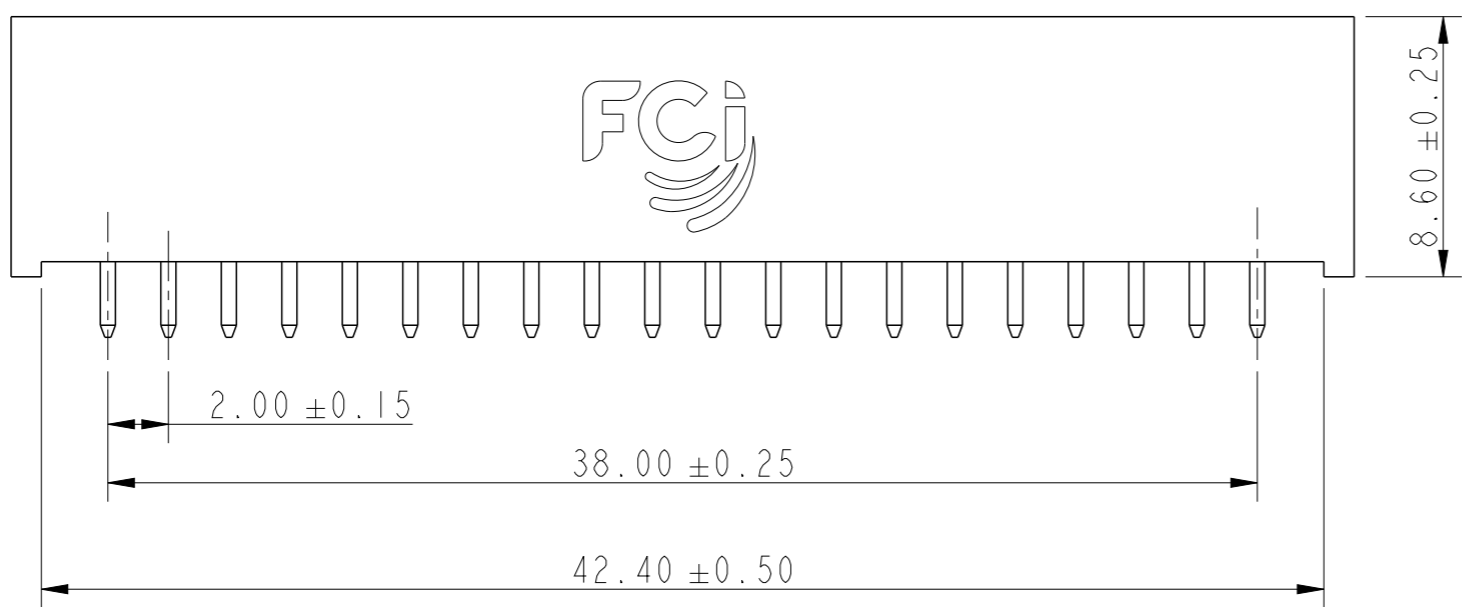


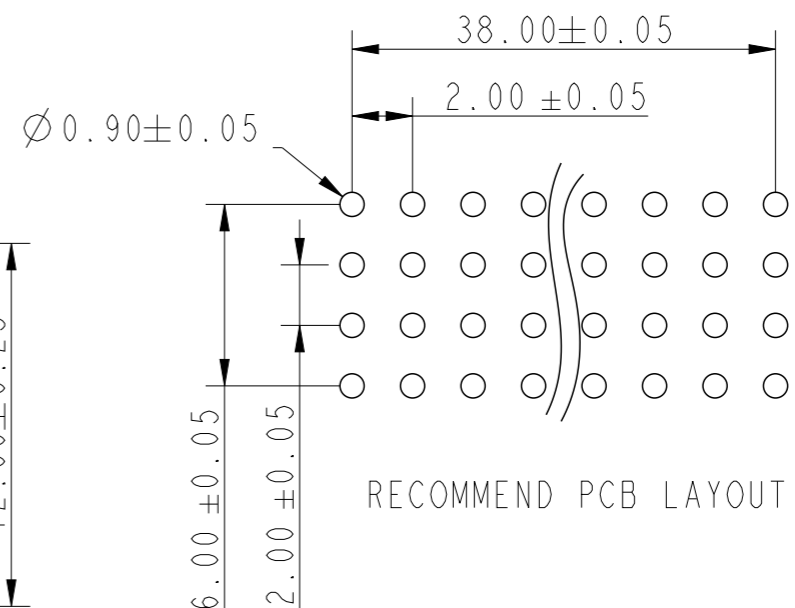

Copyright FCI.

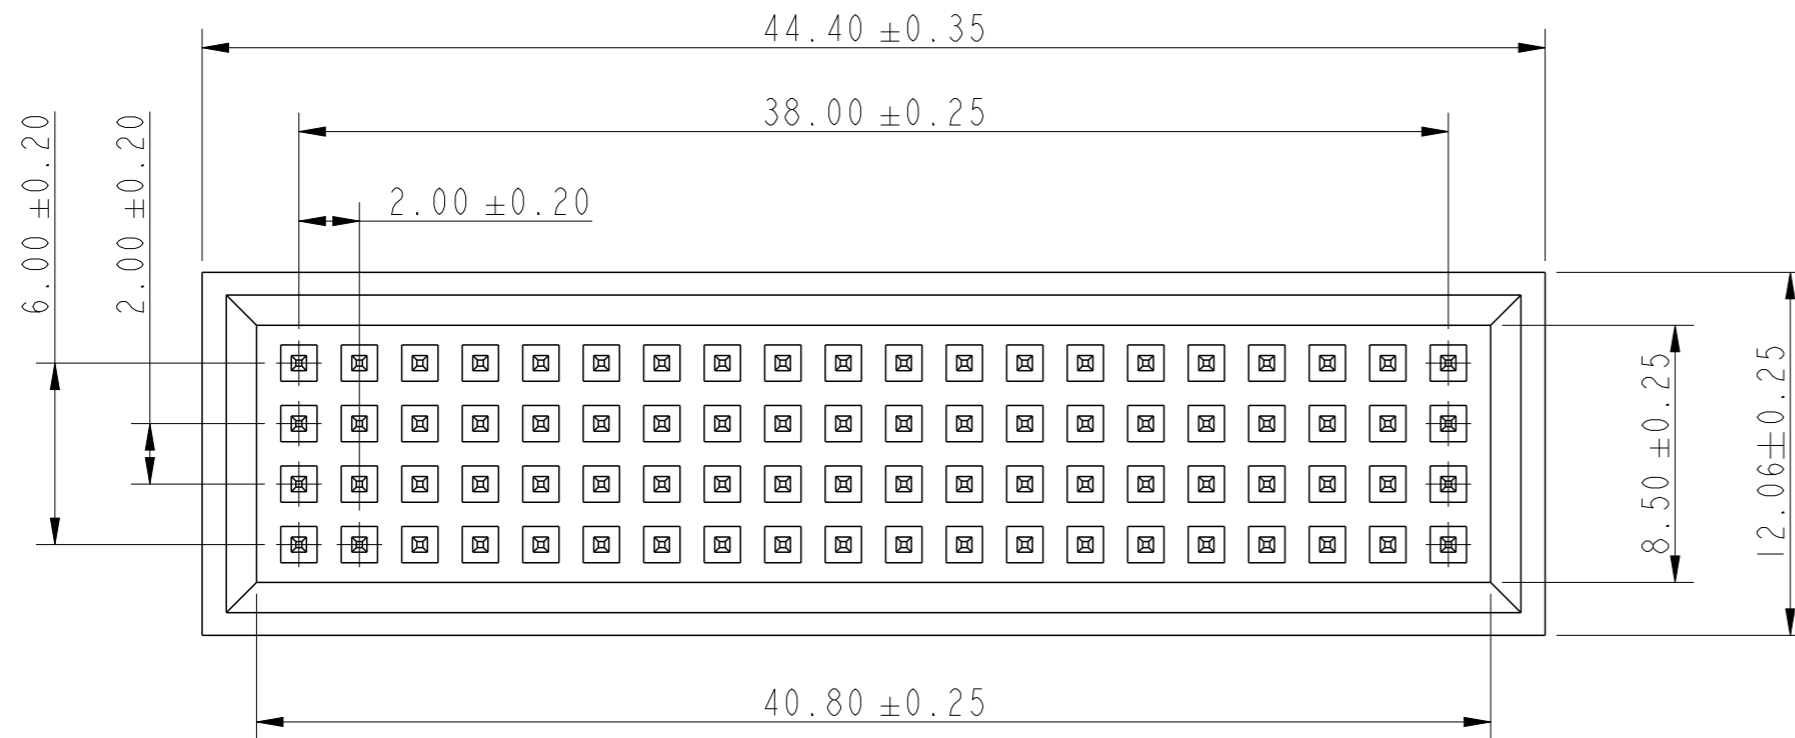


spec ref		dr	Guo-Min Sun	2014/02/24	projection	mm	size	A3	scale	4:1
tolerance std		eng	Guo-Min Sun	2014/09/15			ecn no		ELX-N-18180-1	
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	-			rel level		Released	
surface	✓	linear	0.X	±0.35		title Minitek 2.0mm 4 Rows Plug Through Hole	dwg no 10129186	rev		B
			0.XX	±0.25				Product - Customer Drw		sheet 1 of 2
			0.XXX	±0.15				-		
		angular	0°	±3°	www.fci.com	cat. no.	-		-	

PRODUCT NUMBER DESCRIPTION:
 10129186 - X X 20 X LF

PLATING:

- 1 = 2u" Au ON CONTACT AREA;
MATING Tin 2.54u" ON CONTACT AREA.
- 2 = 10u" Au ON CONTACT AREA;
MATING Tin 2.54u" ON CONTACT AREA.
- 3 = 15u" Au ON CONTACT AREA;
MATING Tin 2.54u" ON CONTACT AREA.
- 4 = 30u" Au ON CONTACT AREA;
MATING Tin 2.54u" ON CONTACT AREA.
- 5 = 10u" Au ON CONTACT AREA;
0.5u" Au ON OTHER AREA;

- LEAD FREE
- PACKAGING OPTIONS
SEE NOTE 4
- PIN NUMBER PER ROW
- TAIL LENGTH(DIM A)
 - 1 = 2.0mm
 - 2 = 2.6mm
 - 3 = 1.6mm

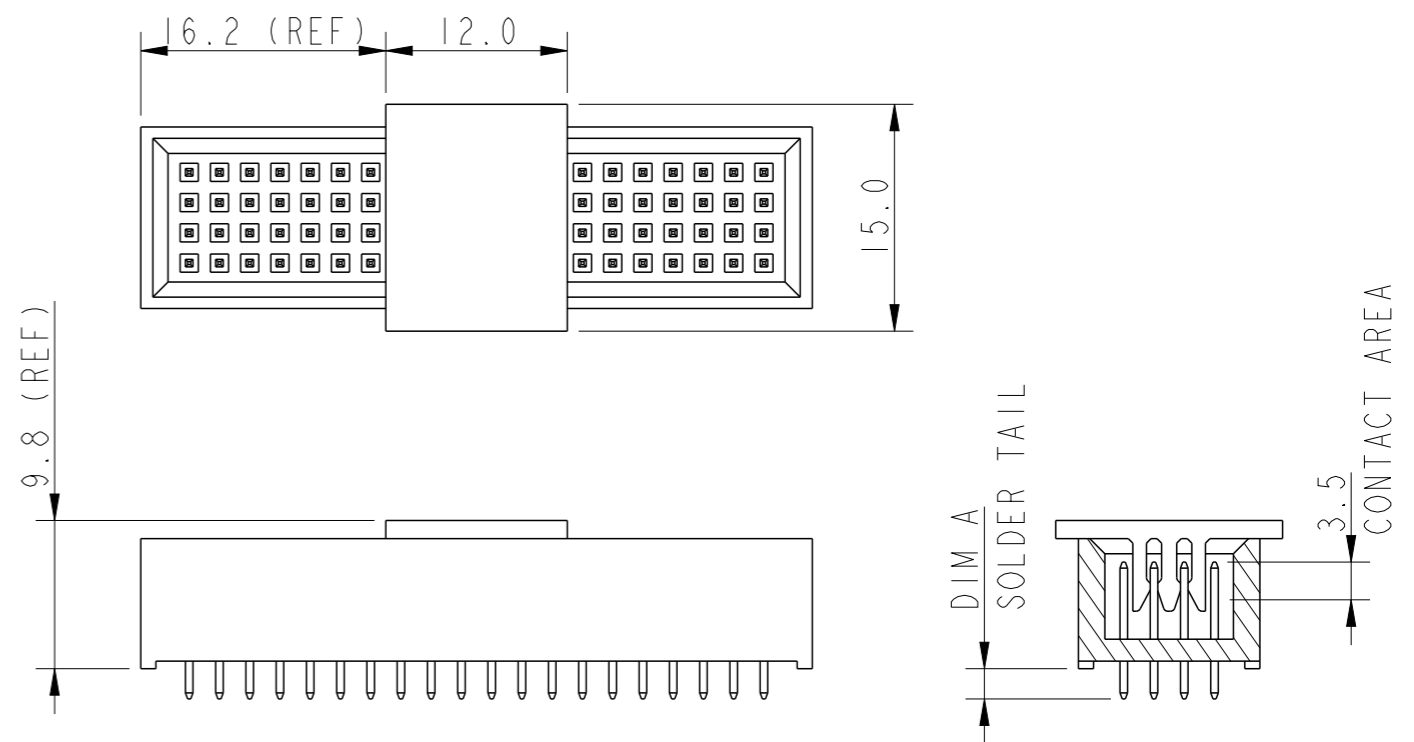

NOTES:

1. MATERIAL HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL 94V-0, COLOR BLACK
2. MATERIAL TERMINAL: COPPER ALLOY
3. THE PRODUCT SPECIFICATION REFER GS-12-1231.
4. PACKAGING;
10129186-XXXXTLF: PACKAGING IN TRAY WITH CAP.
5. THE HOUSING WILL WITHSTAND EXPOSURE TO 260~C PEAK
TEMPERATURE FOR 20 SECONDS IN A CONVECTION, INFRA-RED
OR VAPOR PHASE REFLOW OVEN.
6. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND
OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

dr	Guo-Min Sun	2014/02/24	projection 	mm ←→	size	A3	scale	4:1		
eng	Guo-Min Sun	2014/09/15			ecn no	ELX-N-18180-1				
chr	-	-			rel level	Released				
appr	Rick Bian	2014/09/17	product family	-						
		title			Minitek 2.0mm 4 Rows Plug	dwg no		10129186	rev	B
www.fci.com		cat. no.	-		Product - Customer Drw			sheet 2 of 2		

Copyright FCI.