

DETAILS

Product Number	F14624_ANGELETTE-S-B-PLAIN
Family	Angelette
Type	Reflector
Color	metal
Diameter	110 mm
Height	57,3 mm
Style	round
Optic Material	PC
Holder Material	
Fastening	
Status	production ready
ROHS Compliant	Yes
Date Updated	8/02/2017




OPTICAL PROPERTIES

LED	Viewing	Light	Effi-	cd/lm	Connector
	Angle	Beam	ciency		
V15 Gen6	13 deg	Asymmetric	91 %	7.400	BJB: 47.319.2224
V18 Gen6	15 deg	Asymmetric	91 %	6.000	BJB: 47.319.2274
V22 Gen6	18 deg	Asymmetric	89 %	4.300	A.A.G. STUCCHI: 8102/G2
V18 Gen7	15 deg	Asymmetric	91 %	5.500	BJB: 47.319.2350
CXA/B 1816 & CXA/B 1820 & CXA 1850	10 deg	Asymmetric	90 %	9.000	-
LUXEON CoB 1208	12 deg	Asymmetric	91 %	7.800	A.A.G. STUCCHI: 8301/G2
COB D Series LES 22 mm	sim: 18	Asymmetric	sim: 88 %	sim: 4.480	BJB: 47.319.2030
COB D Series LES 14.5 mm	12 deg	Asymmetric	91 %	7.720	A.A.G. STUCCHI: 8101/G2
COB D Series LES 14.5 mm	12 deg	Asymmetric	91 %	7.720	BJB: 47.319.2021


NOTE:
 Customer may add additional light modifying parts to Angelette family(excluding the plain versions):
 Minimum height of additional part is 1.5mm and maximum is 2.2mm. Diameter is 105.9mm±0.3

57.26 + Basepart

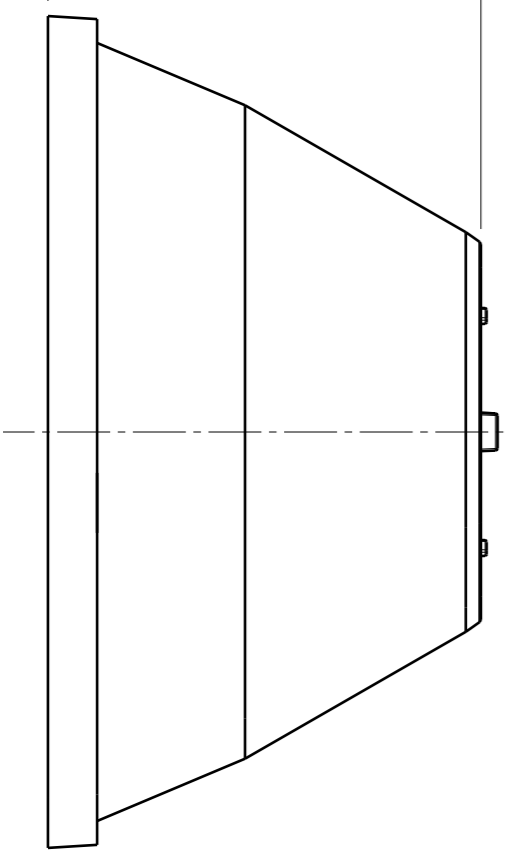


6.5

Front view

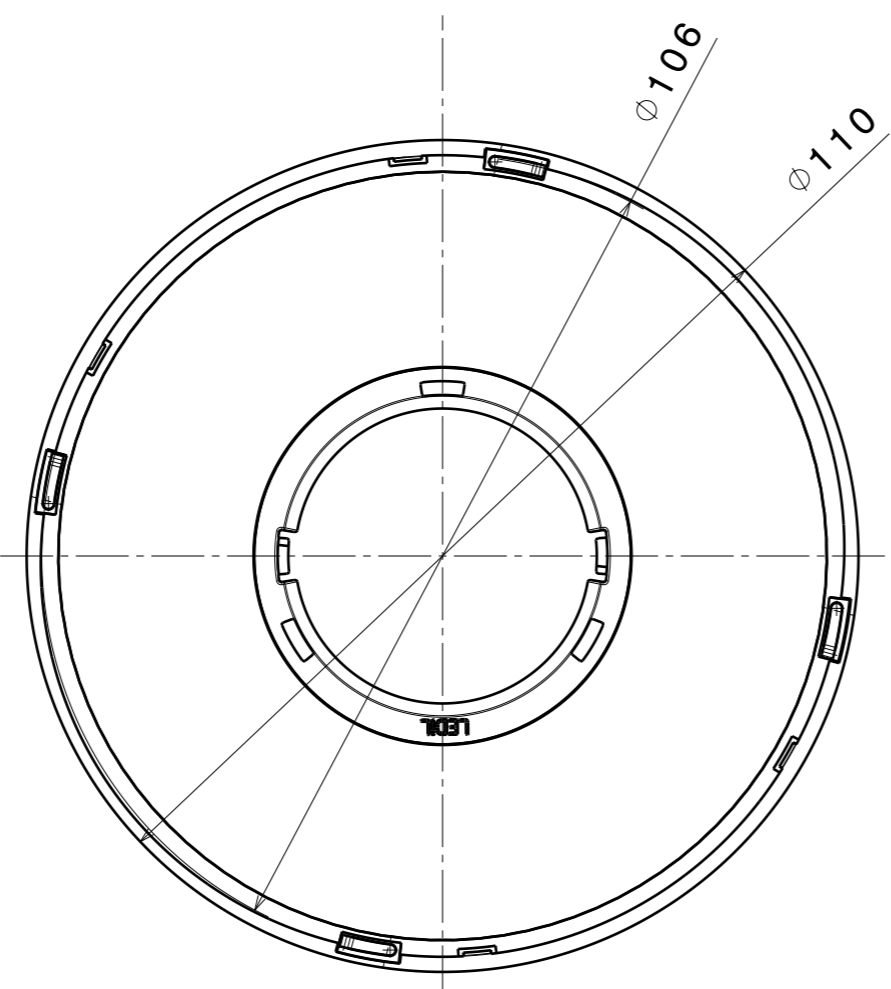

Top view




2.5


Section view A-A

Additional part

ANGELETTE-S-B

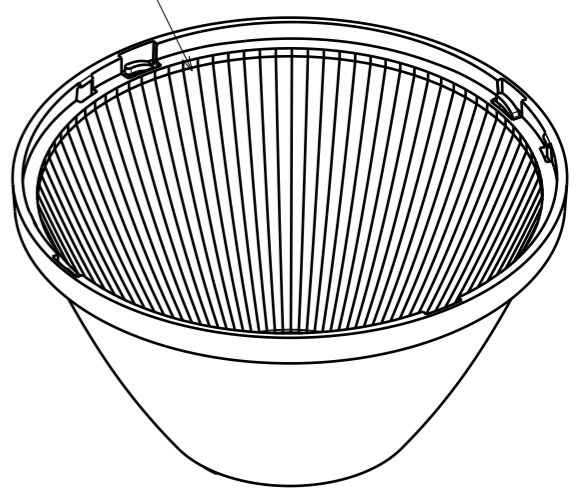

ANGELETTE-S_B-PLAIN

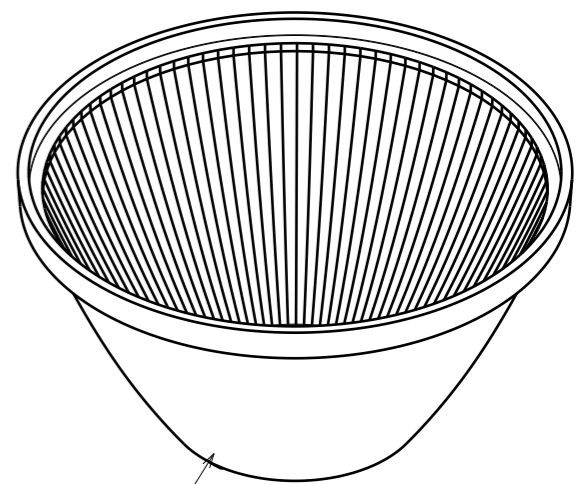

Tolerances if not otherwise shown
 According to DIN ISO 2768-1
 Linear measures:
 up to 30mm class M, otherwise class C
 According to DIN ISO 2768-2
 Form and position: class L

LEDiL LediL Oy
 Salorankatu 10
 FIN 24240 SALO
 Finland

THIRD ANGLE PROJECTION:

DRAWING TITLE
Datasheet_ANGELETTE-S-B


This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.

SIZE	PART NUMBER
A3	ANGELETTE-S-B ANGELETTE-S-B-PLAIN


SCALE	1:1	WEIGHT		SHEET	1/1
-------	-----	--------	--	-------	-----

Luminaire: Ledil F14624_ANGELETTE-S-B-PLAIN_(V15+BJB)


Lamps: 1 x Bridgelux_V15_+47.319.2224_1096.43lm@250mA_P=8.2647W_I=0.25A

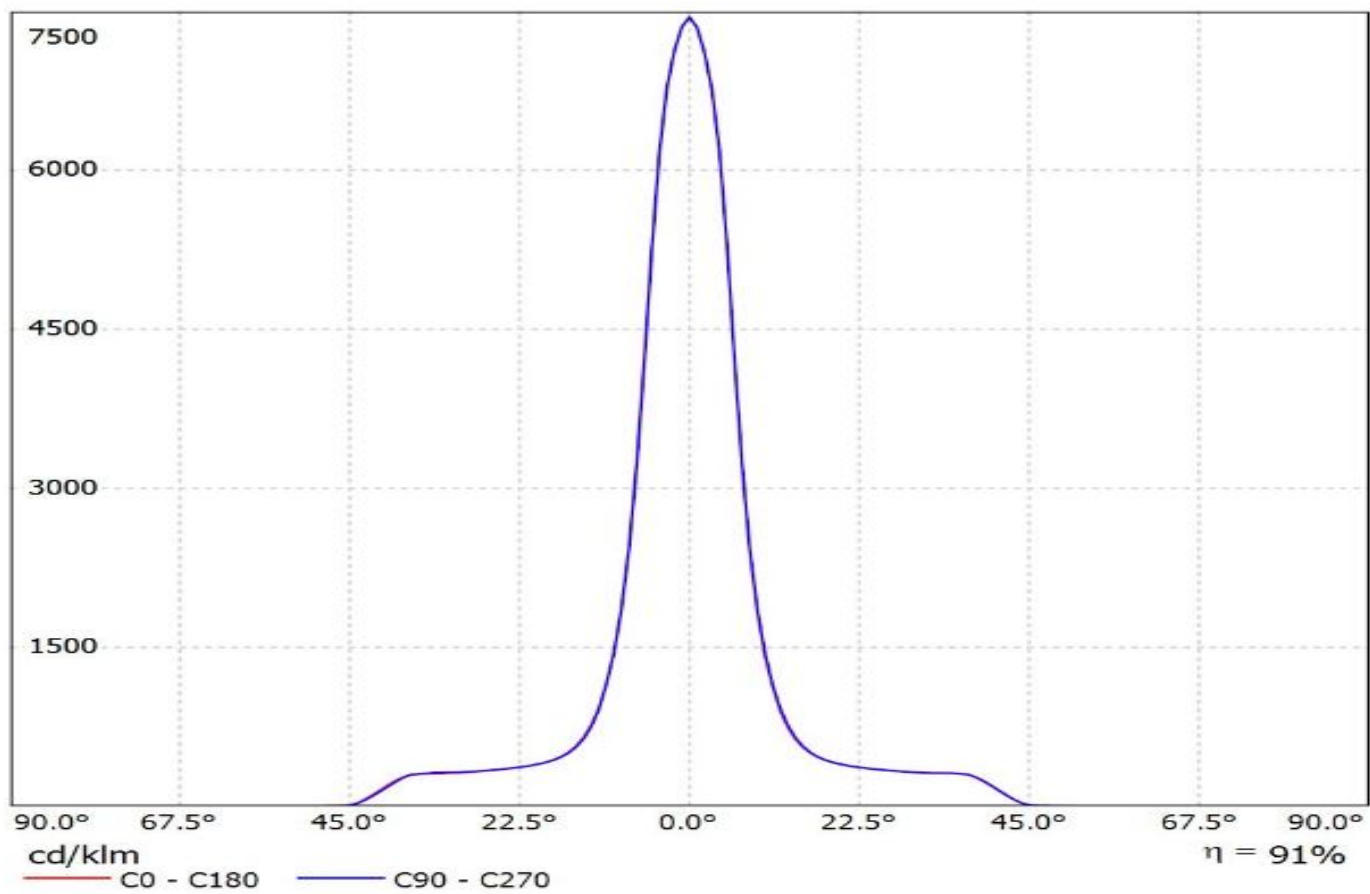


Luminaire: Ledil F14624_ANGELETTE-S-B-PLAIN_(V18+BJB)
Lamps: 1 x Bridgelux_V18_(BXRC-30E4000-F-23)
_+47.319.2274_1094.62lm@250mA_CCT=3000K_P=6.875W_I=0.25A

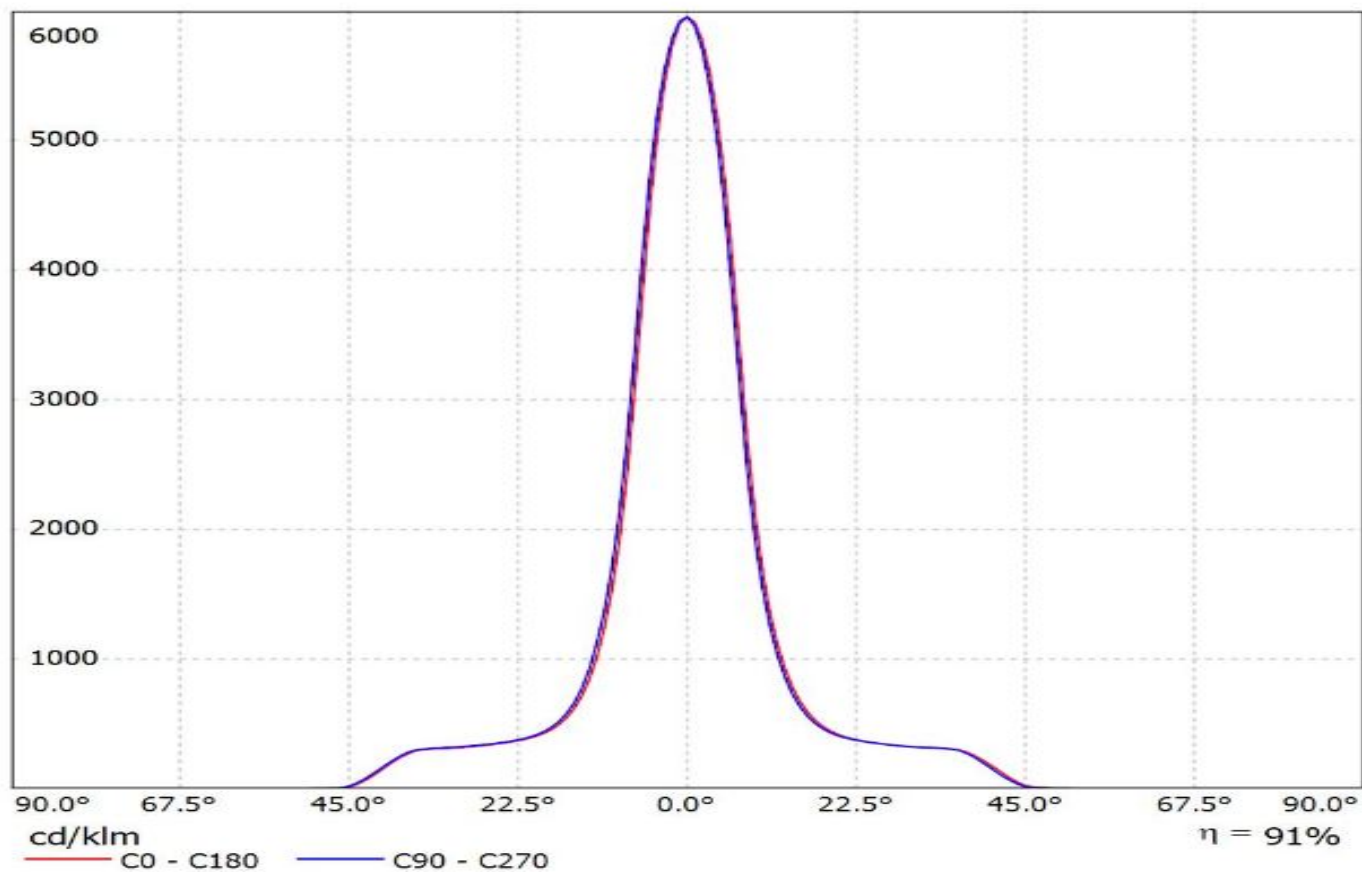

Luminaire: Ledil F14624_ ANGELETTE-S-B-PLAIN_(V22+STUCCHI)
Lamps: 1 x Bridgelux_V22_(BXRE30E6500H-Y2)
_+8102/G2_1226.78lm@250mA_CCT=3000K_P=8.111W_I=0.25A

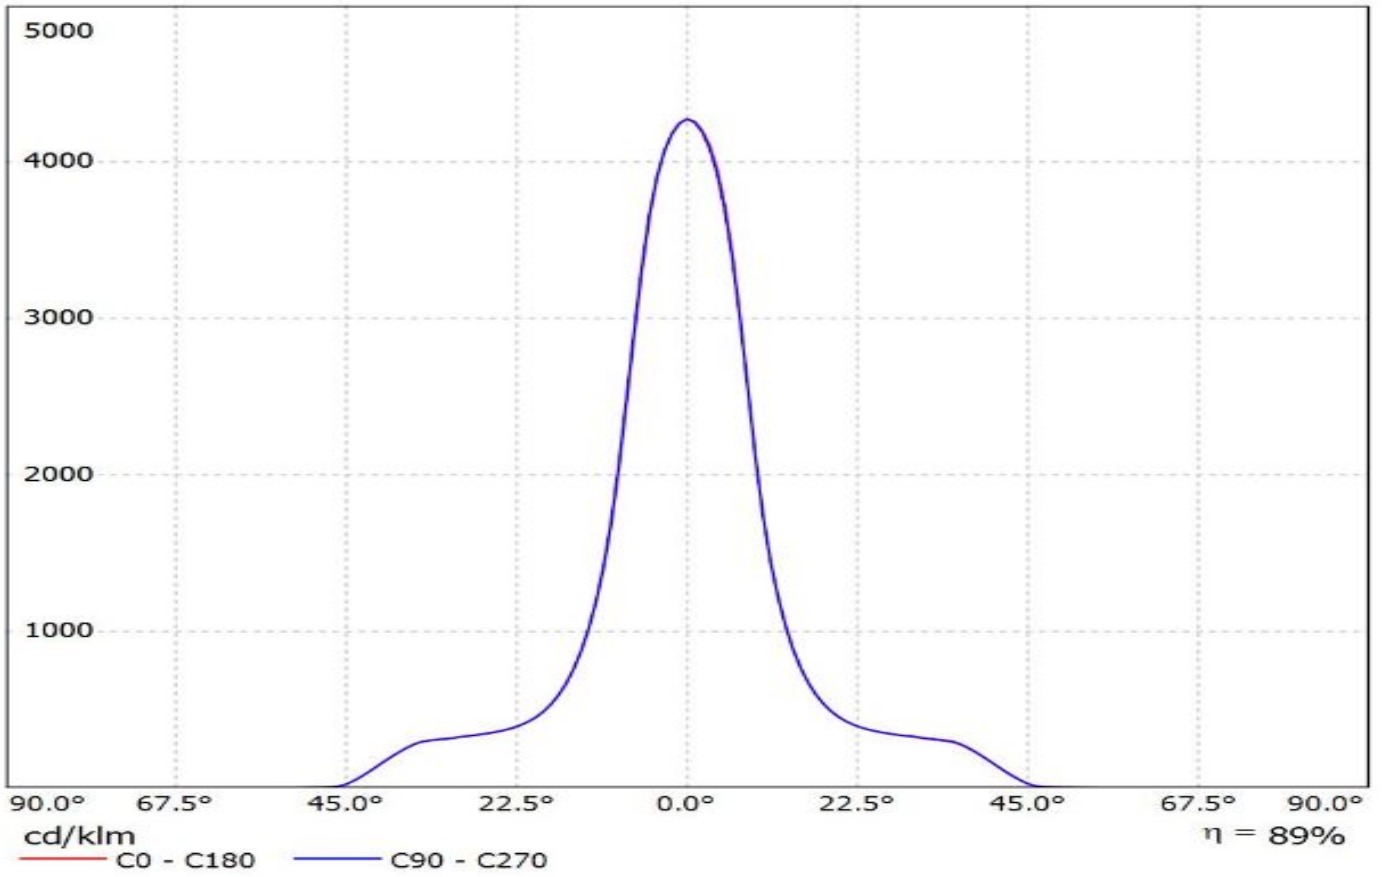


Luminaire: LEDiL Oy F14624_ANGELETTE-S-B-PLAIN_(V18_Gen7)+BJB
Lamps: 1 x Bridgelux_V18_Gen7_(BXRE-30E4000-B)+BJB_47.319.2350_1384.73lm@250mA_P=8.09577W_I=0.25A

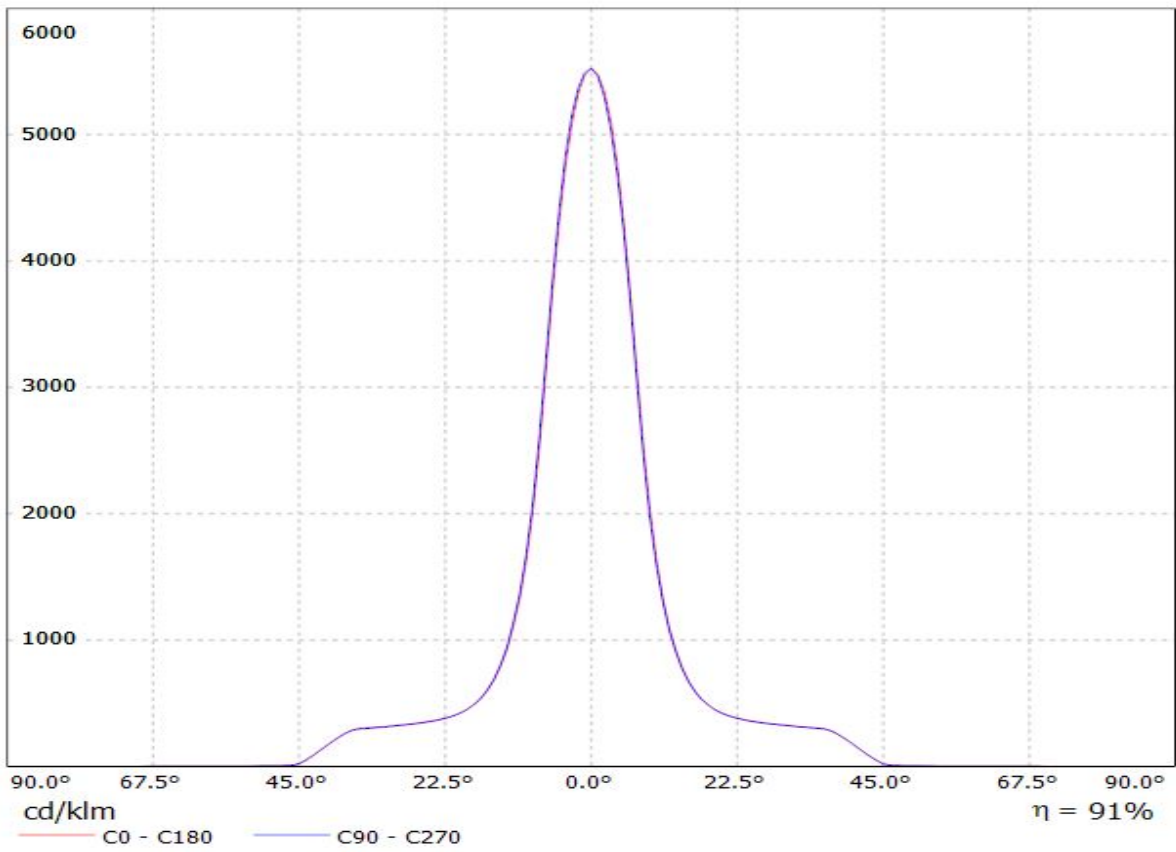


Luminaire: Ledil F14616_ANGELETTE-S-B-PLAIN_(CXA1850)_C1

Lamps: 1 x Cree_CXA1850_(CXA1850-30F-T4-N0Y-00001)_827.831lm@250mA_P=8.2635W_I=0.25A

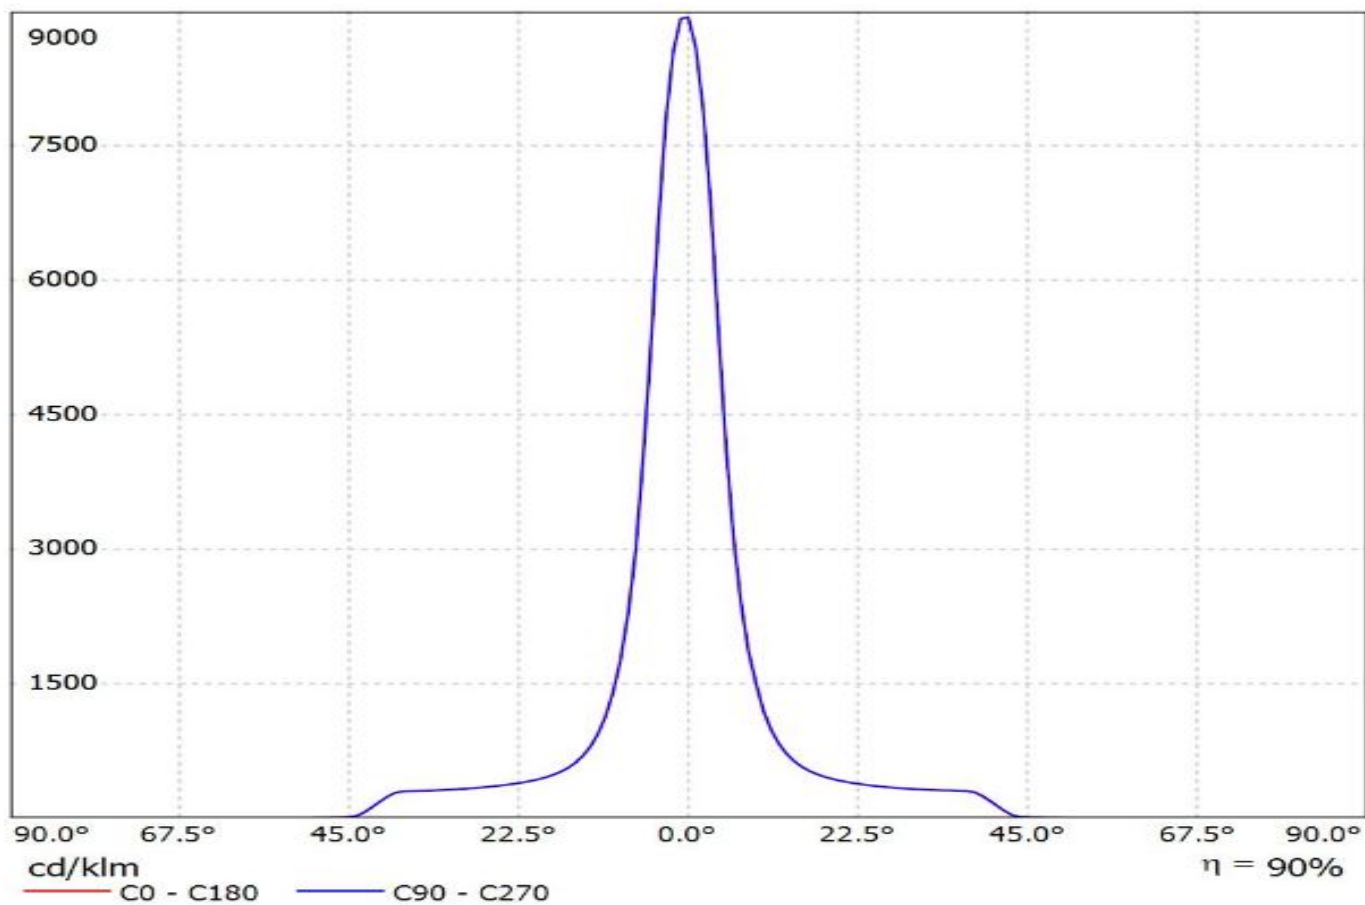


Luminaire: Ledil F14624_ANGELETTE-S-B-PLAIN_(CoB1208+STUCCHI)

Lamps: 1 x Luxeon_CoB1208_(L2C2-4080)_+_8301/G2_1410.19lm@250mA_P=8.1722W_I=0.25A

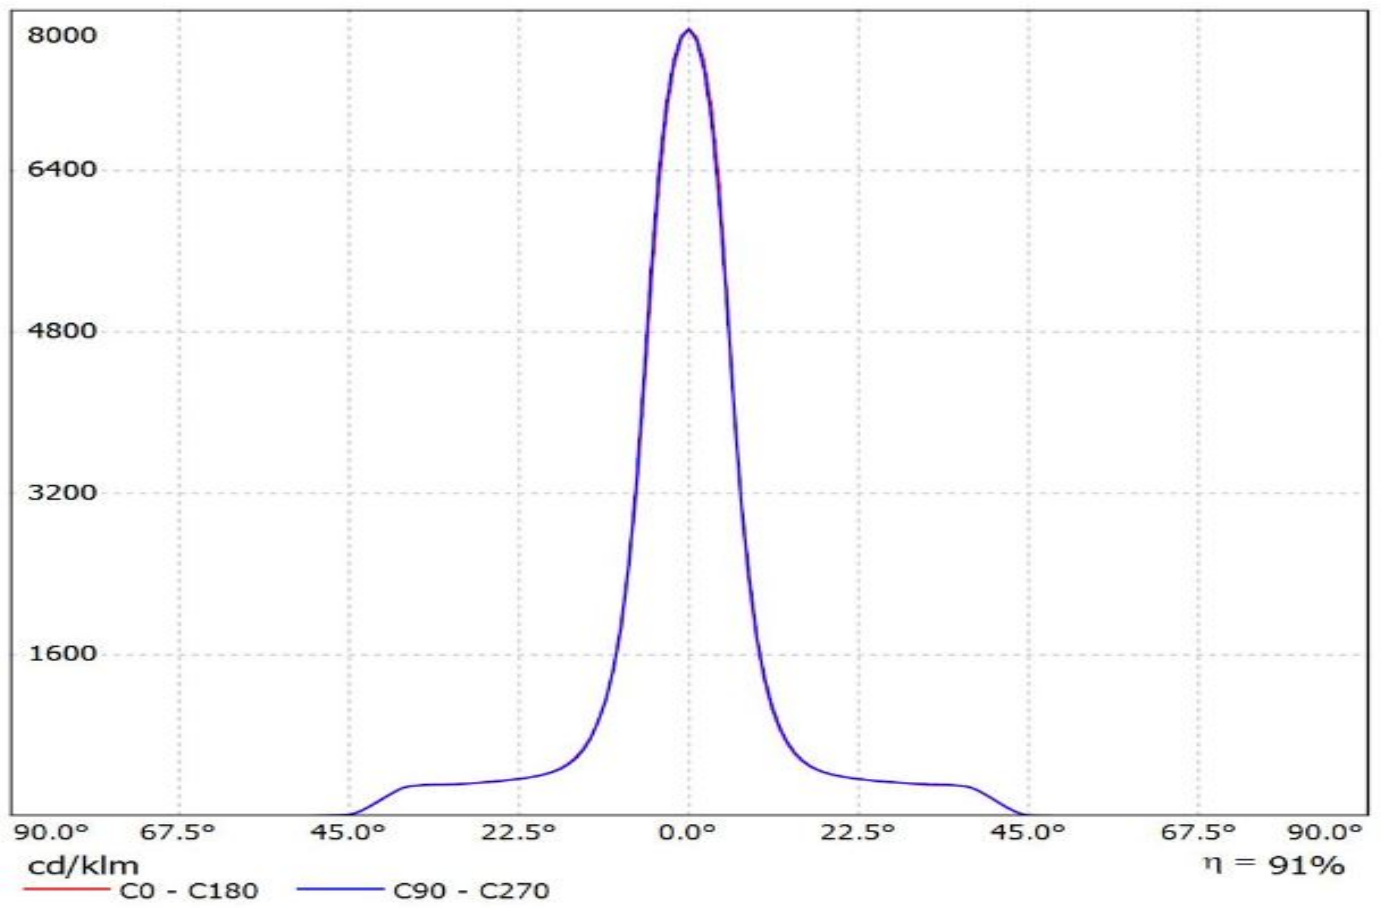


Luminaire: Ledil Oy F14624_ANGELETTE-S-B+_BJB_47.319.2030_SAMSUNG_COB_D_LC040D_SIMULATED
Lamps: 1 x SAMSUNG LC040D

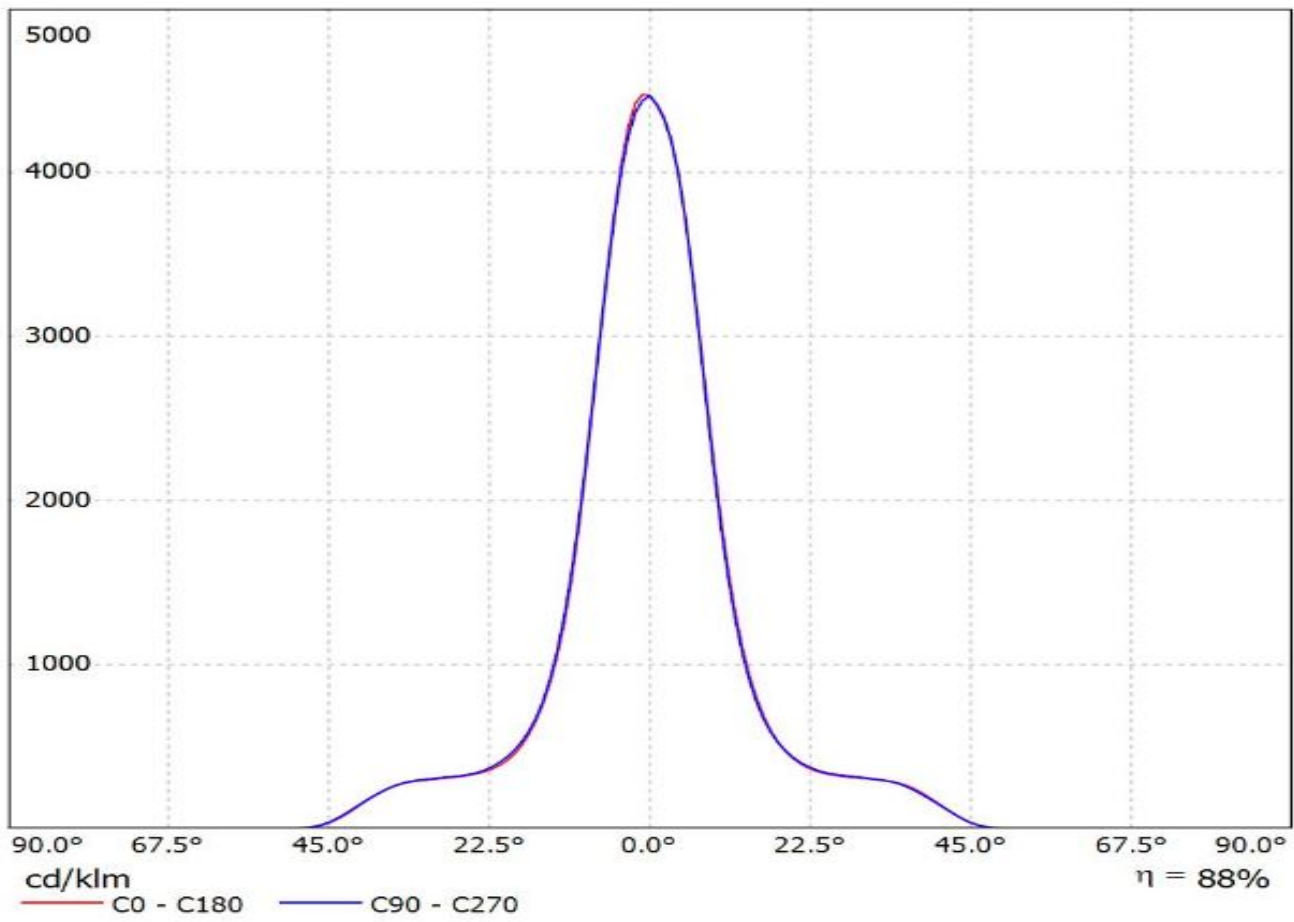


Luminaire: LEDiL Oy F14624_ ANGELETTE-S-B-PLAIN (COB_D_14,5mm)

Lamps: 1 x Samsung_COB_D_Series-LES-14,5_LC026D_1296.34lm@250mA_CCT=3000K_P=8.1225W_I=0.250A

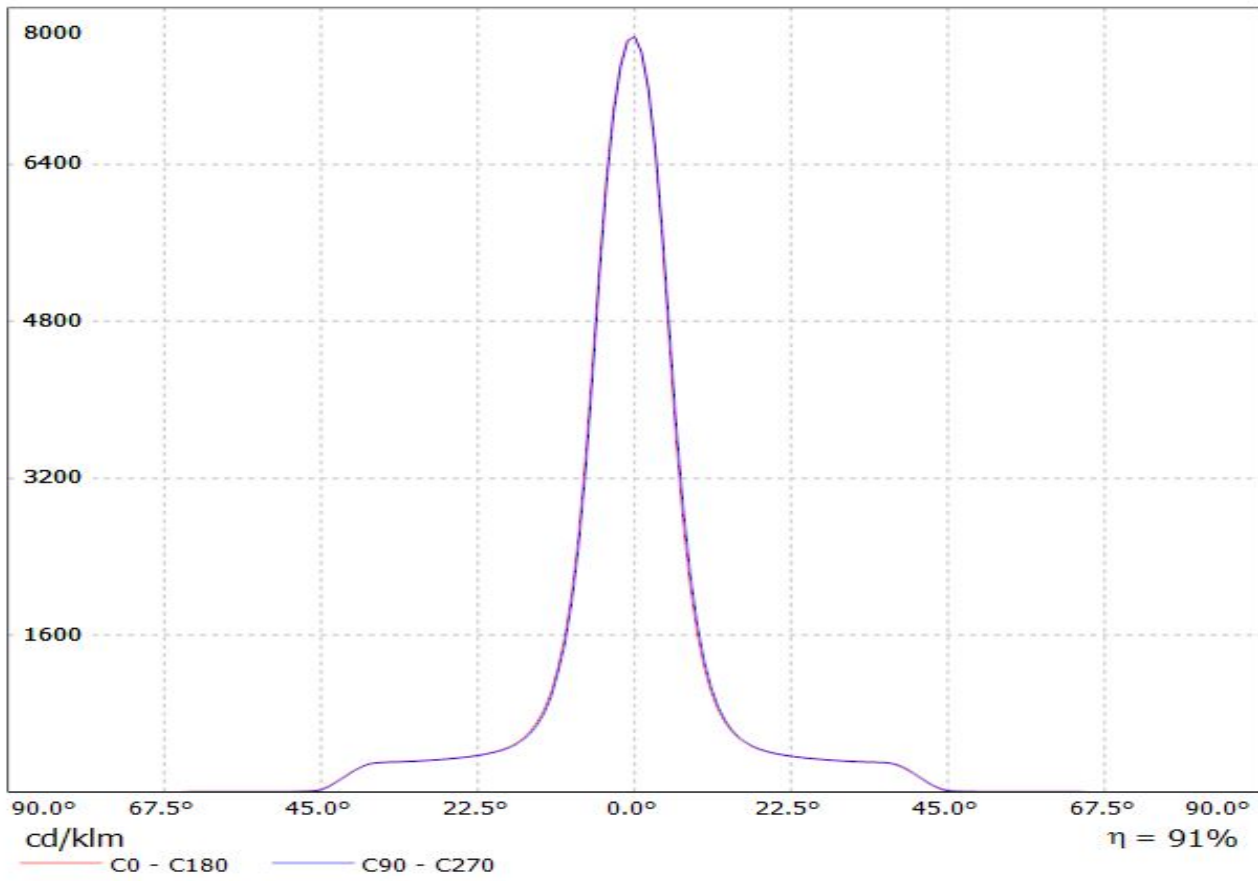


Luminaire: LEDiL Oy F14624_ ANGELETTE-S-B-PLAIN (COB_D_14,5mm)

Lamps: 1 x Samsung_COB_D_Series-LES-14,5_LC026D_1296.34lm@250mA_CCT=3000K_P=8.1225W_I=0.250A

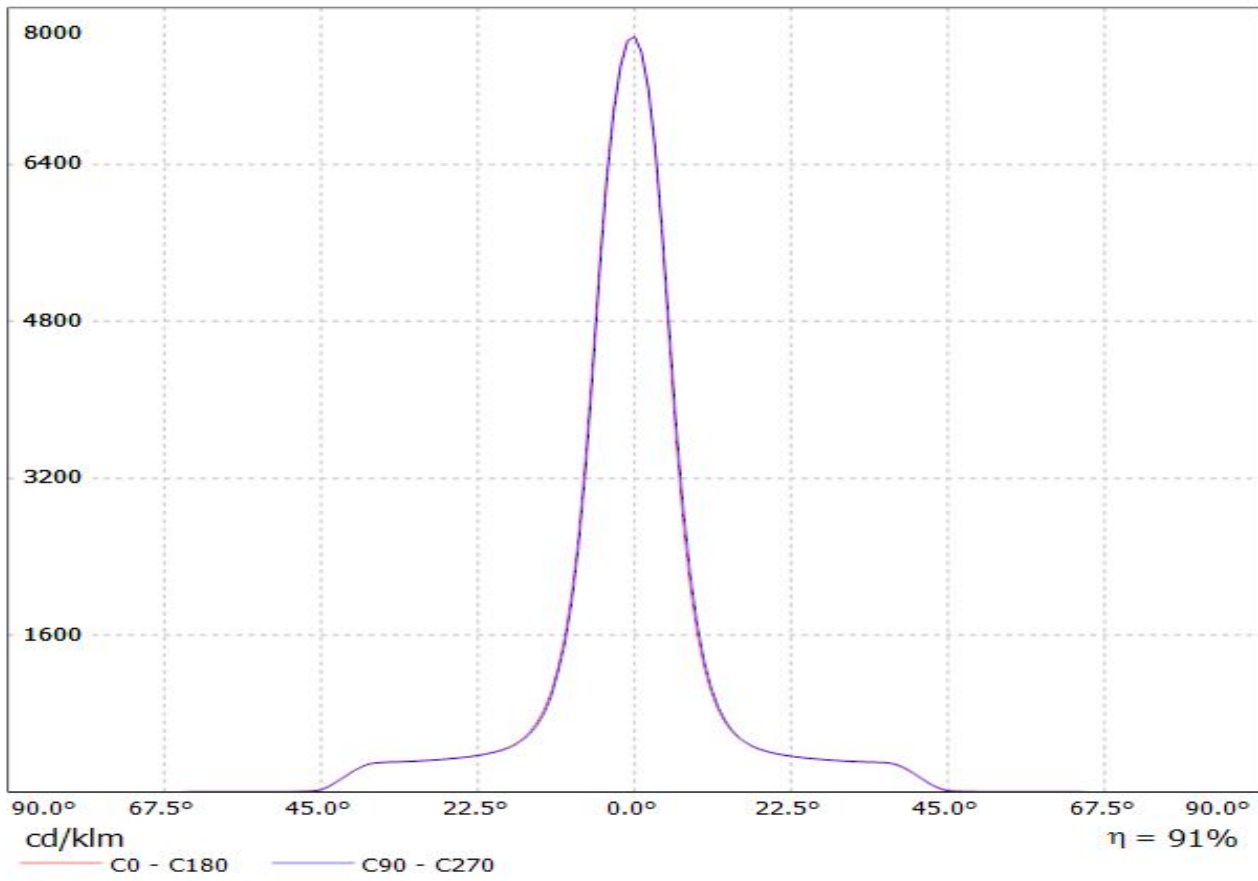

Luminaire: Ledil F14624_ANGELETTE-S-B-PLAIN_(V15+BJB)

Lamps: 1 x Bridgelux_V15_+47.319.2224_1096.43lm@250mA_P=8.2647W_I=0.25A

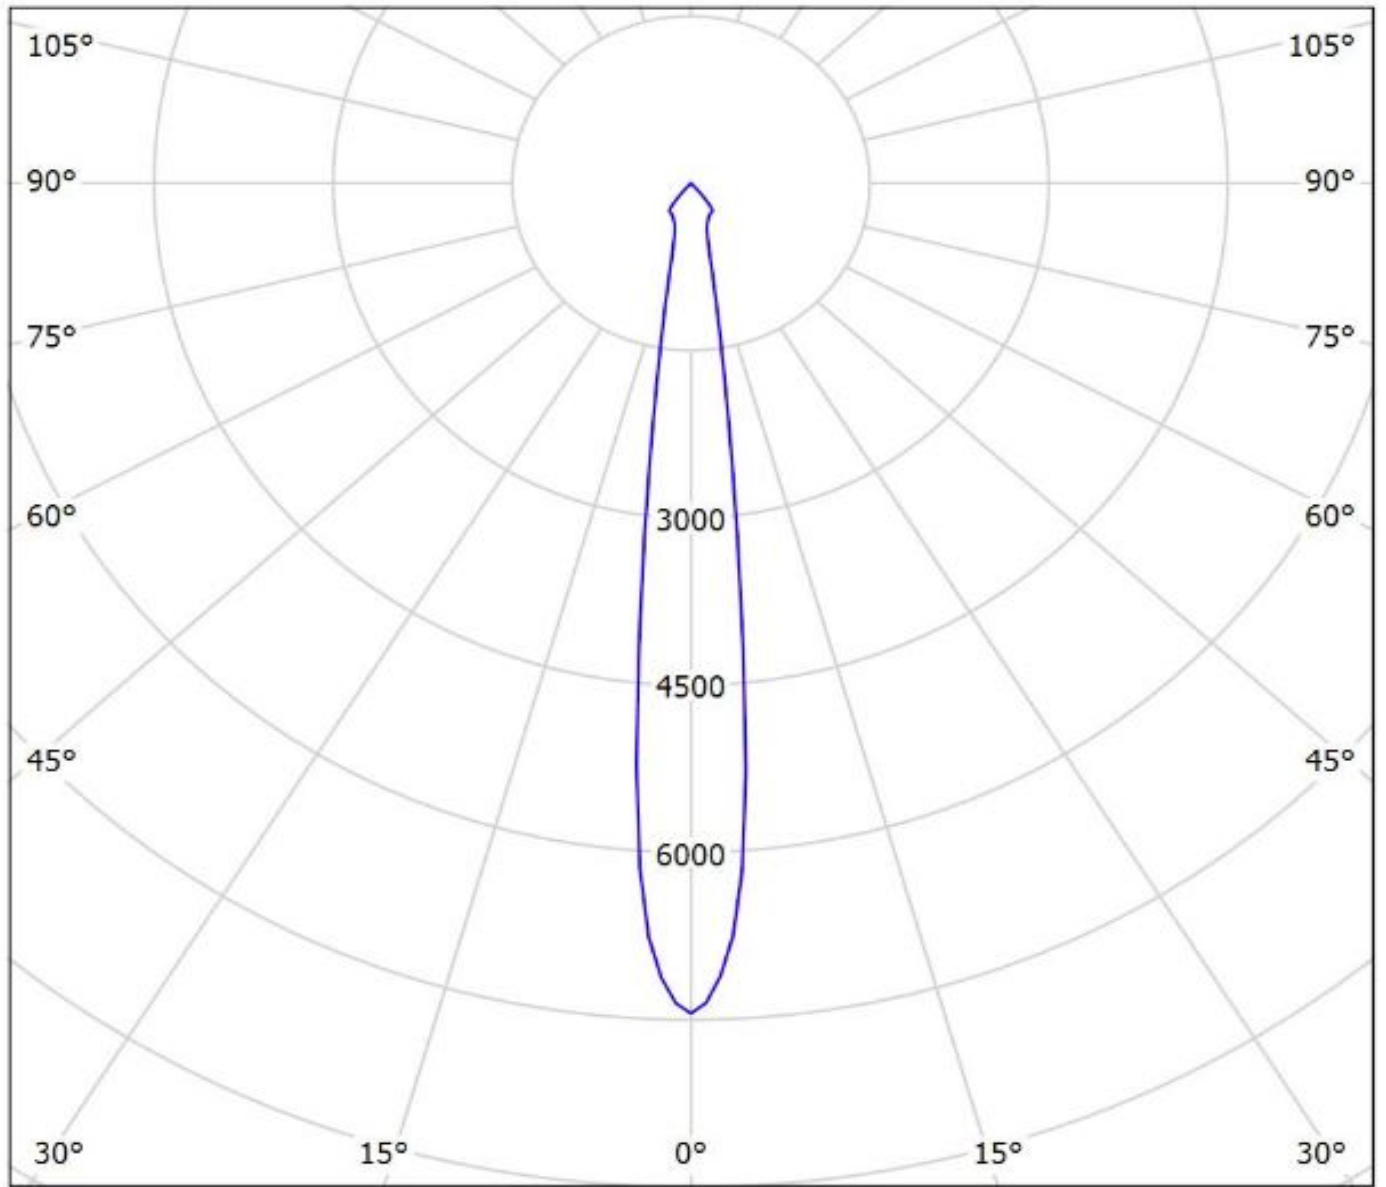


cd/klm

— C0 - C180

— C90 - C270

$\eta = 91\%$

Luminaire: Ledil F14624_ANGELETTE-S-B-PLAIN_(V18+BJB)
Lamps: 1 x Bridgelux_V18_(BXRC-30E4000-F-23)
_+47.319.2274_1094.62lm@250mA_CCT=3000K_P=6.875W_I=0.25A

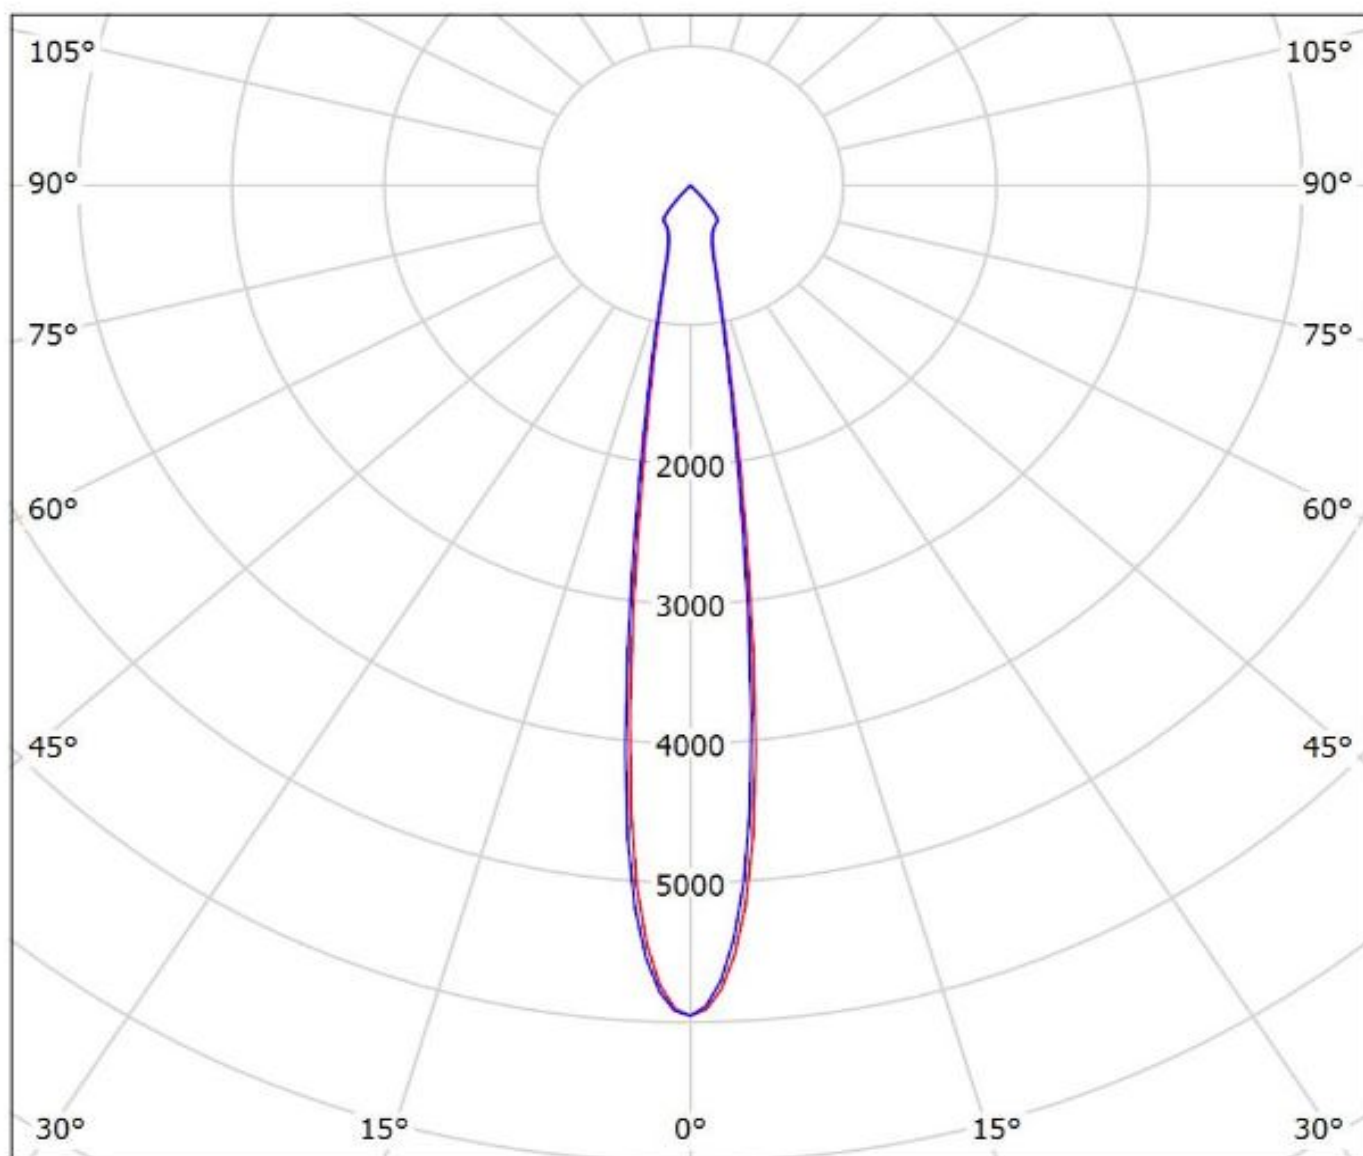


cd/klm

— C0 - C180 — C90 - C270

$\eta = 91\%$

Luminaire: Ledil F14624_ ANGELETTE-S-B-PLAIN_(V22+STUCCHI)
Lamps: 1 x Bridgelux_V22_(BXRE30E6500H-Y2)
_+8102/G2_1226.78lm@250mA_CCT=3000K_P=8.111W_I=0.25A

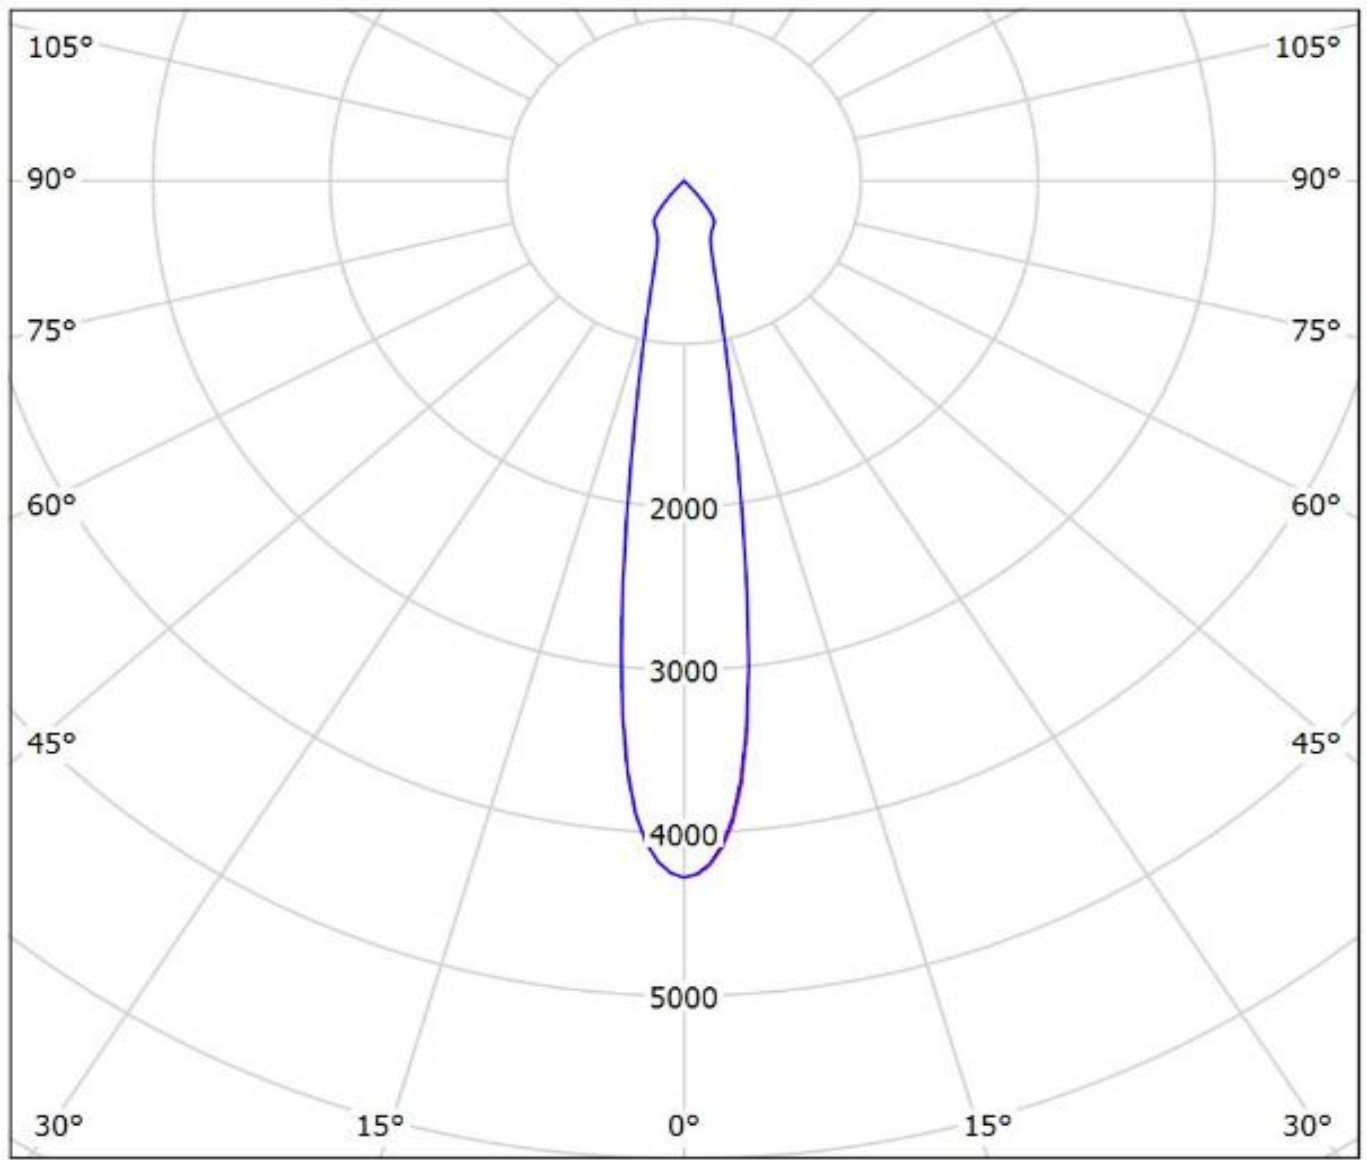


cd/klm

— C0 - C180 — C90 - C270

η = 89%

Luminaire: LEDiL Oy F14624_ANGELETTE-S-B-PLAIN_(V18_Gen7)+BJB

Lamps: 1 x Bridgelux_V18_Gen7_(BXRE-30E4000-B)+BJB_47.319.2350_1384.73lm@250mA_P=8.09577W_η=0.25A

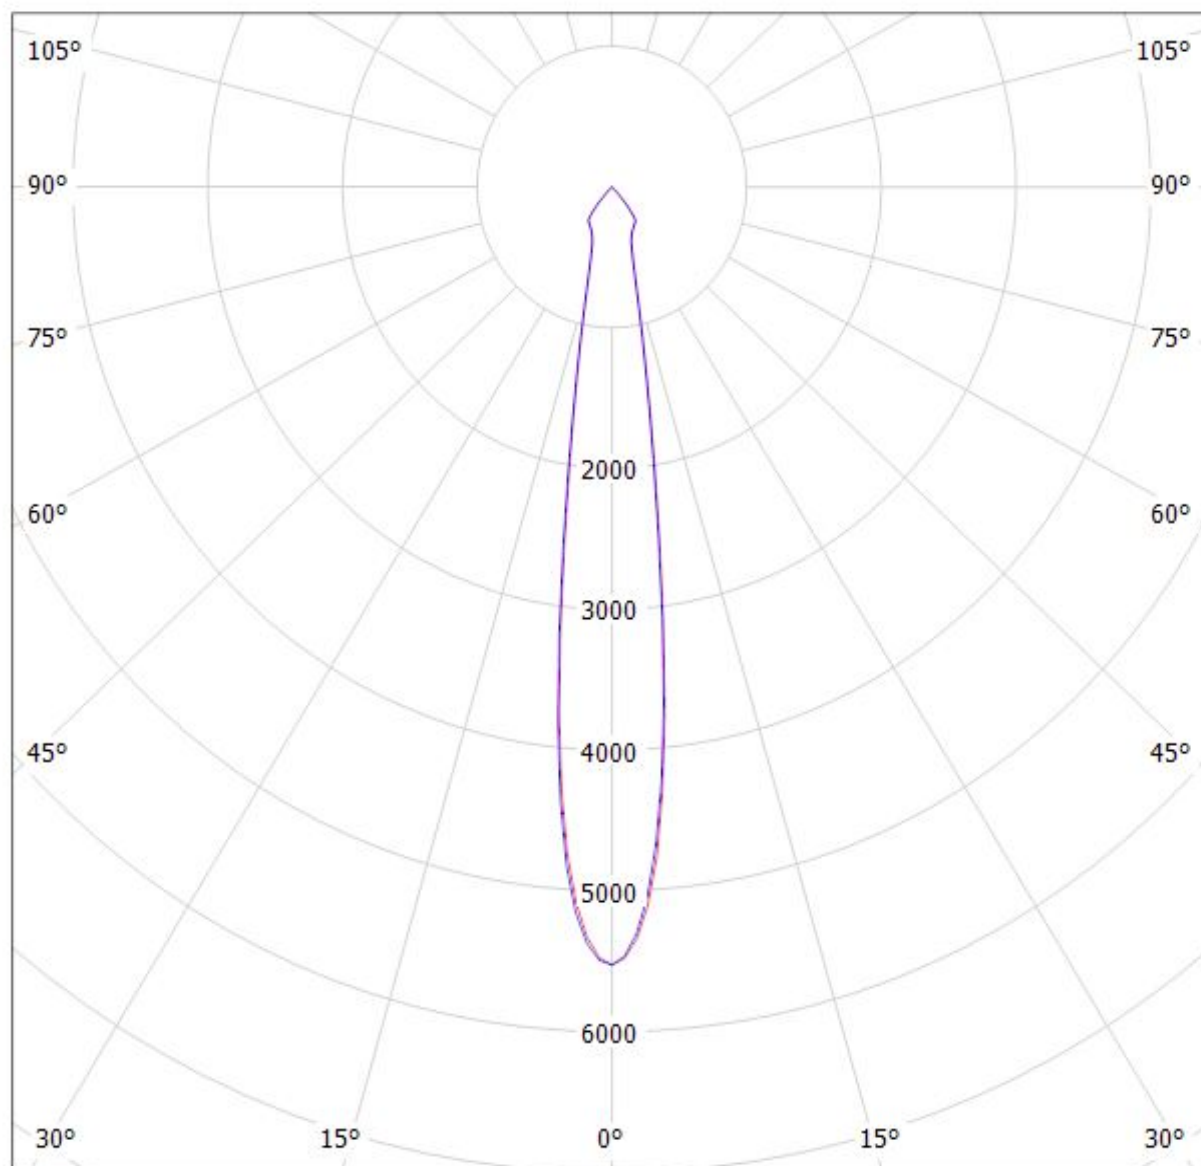

cd/klm


— C0 - C180

— C90 - C270

η = 91%

Luminaire: Ledil F14616_ANGELETTE-S-B-PLAIN_(CXA1850)_C1

Lamps: 1 x Cree_CXA1850_(CXA1850-30F-T4-N0Y-00001)_827.831lm@250mA_P=8.2635W_I=0.25A

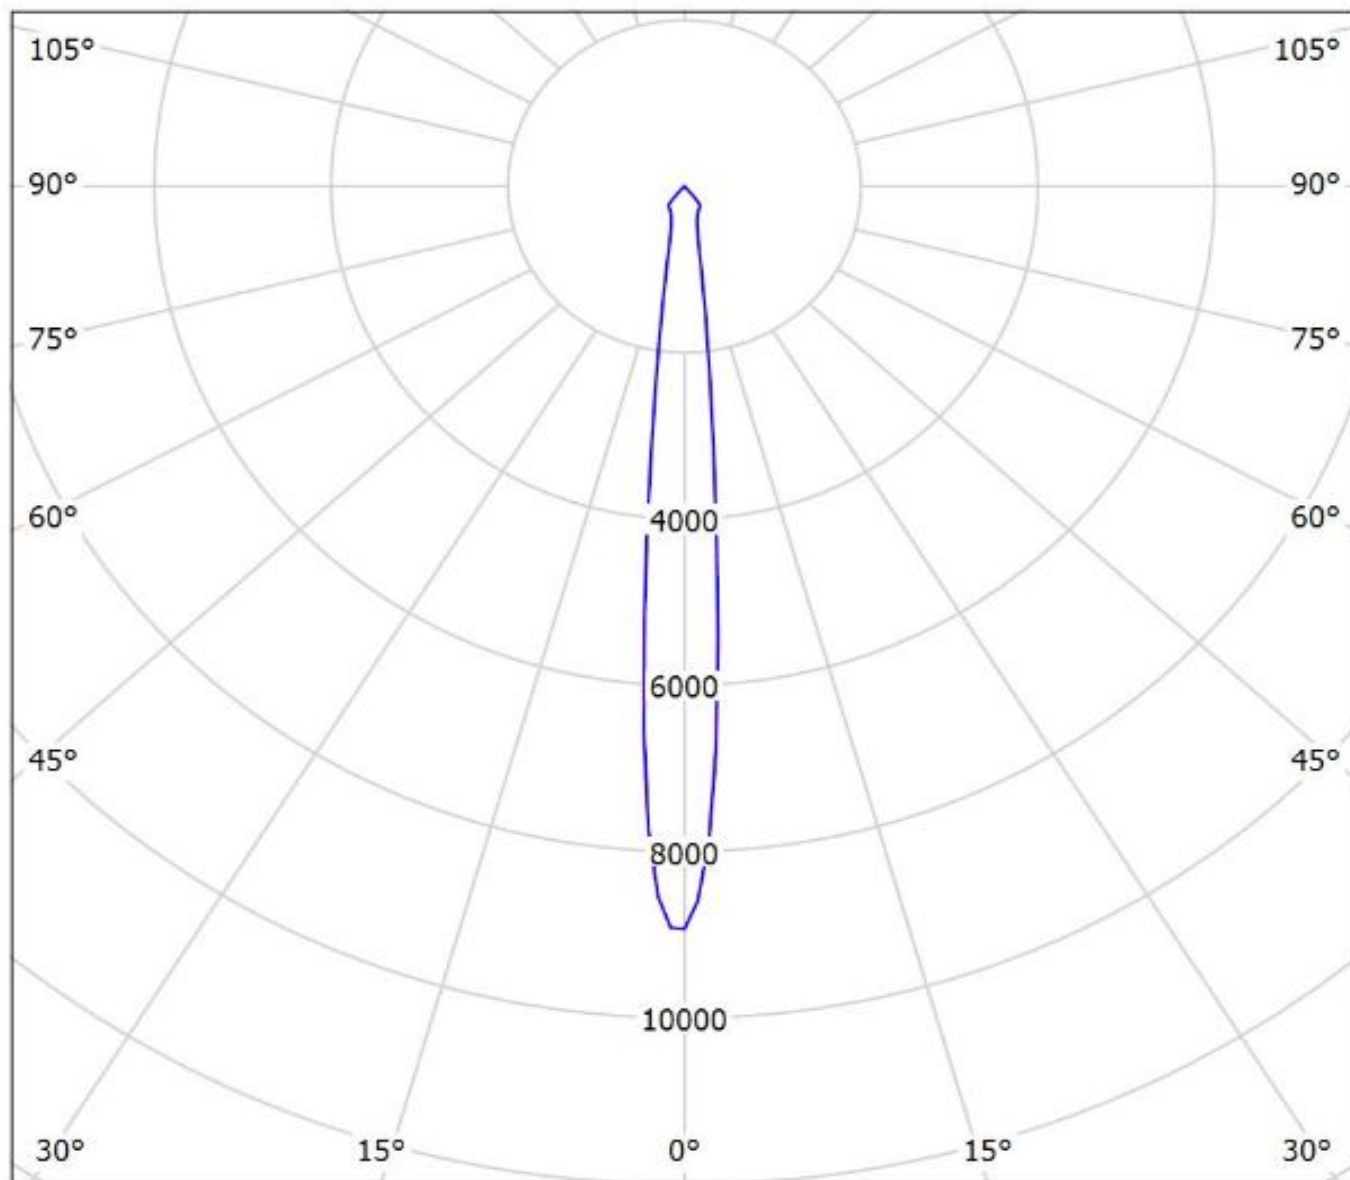

cd/klm


— C0 - C180

— C90 - C270

$\eta = 90\%$

Luminaire: Ledil F14624_ ANGELETTE-S-B-PLAIN_(CoB1208+STUCCHI)

Lamps: 1 x Luxeon_CoB1208_(L2C2-4080)_+_8301/G2_1410.19lm@250mA_P=8.1722W_I=0.25A

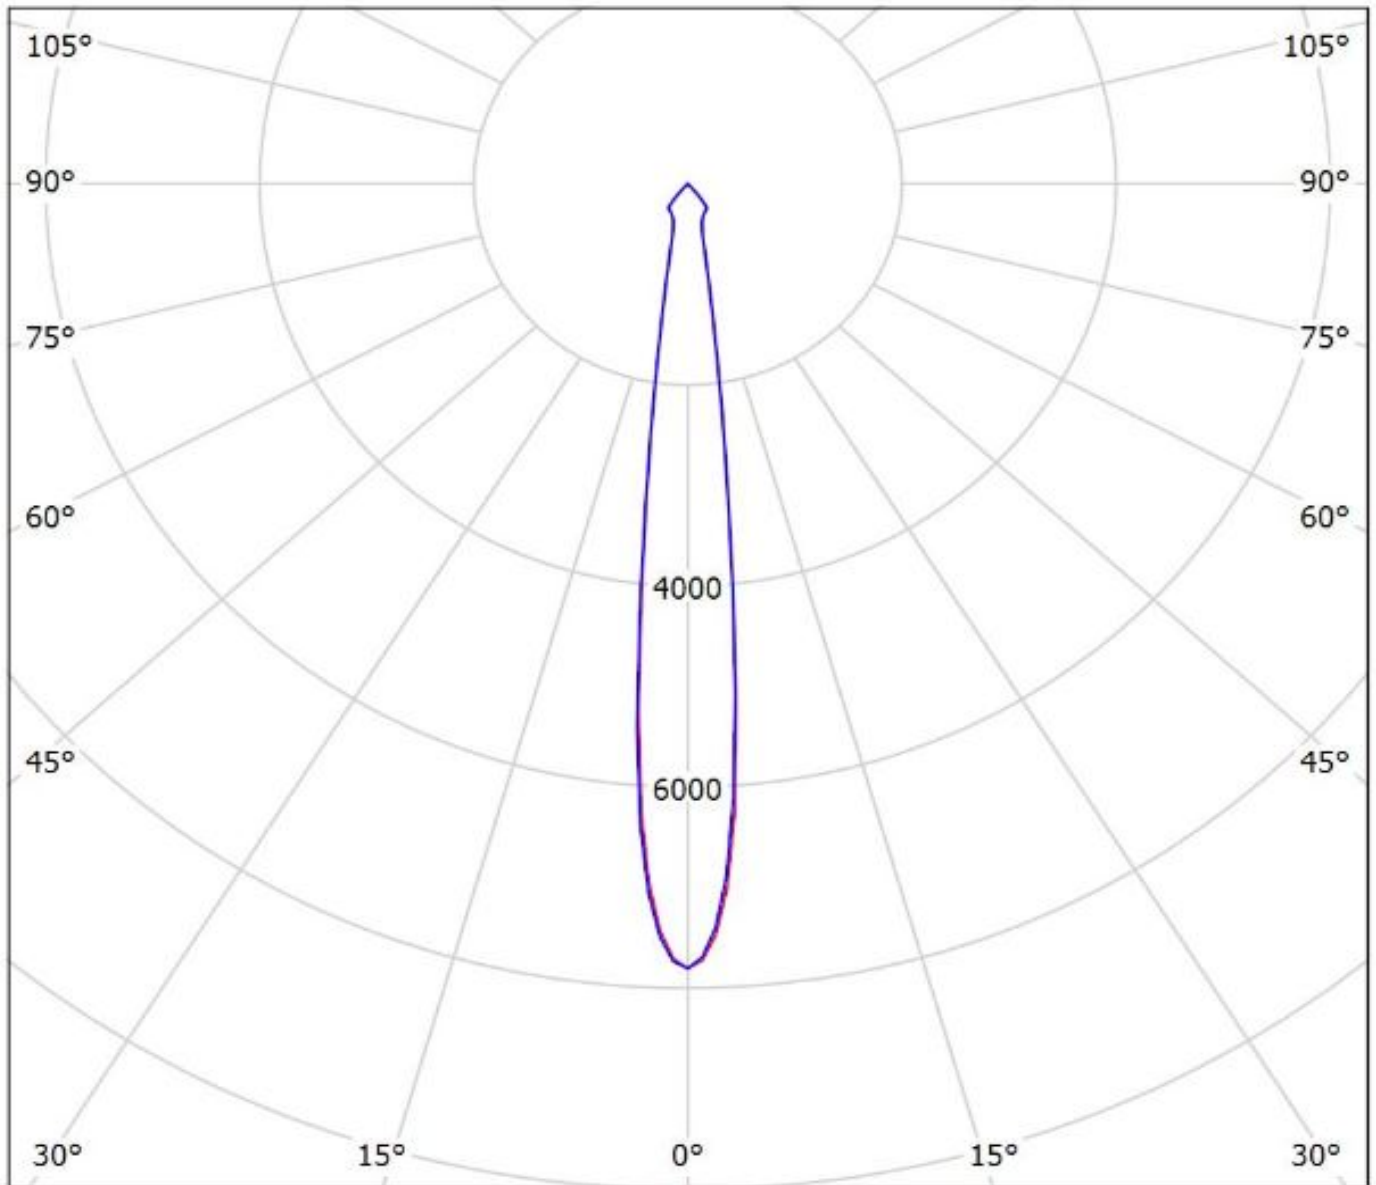


cd/klm

— C0 - C180

— C90 - C270

$\eta = 91\%$

Luminaire: Ledil Oy F14624_ANGELETTE-S-B+_BJB_47.319.2030_SAMSUNG_COB_D_LC040D_SIMULATED
Lamps: 1 x SAMSUNG LC040D

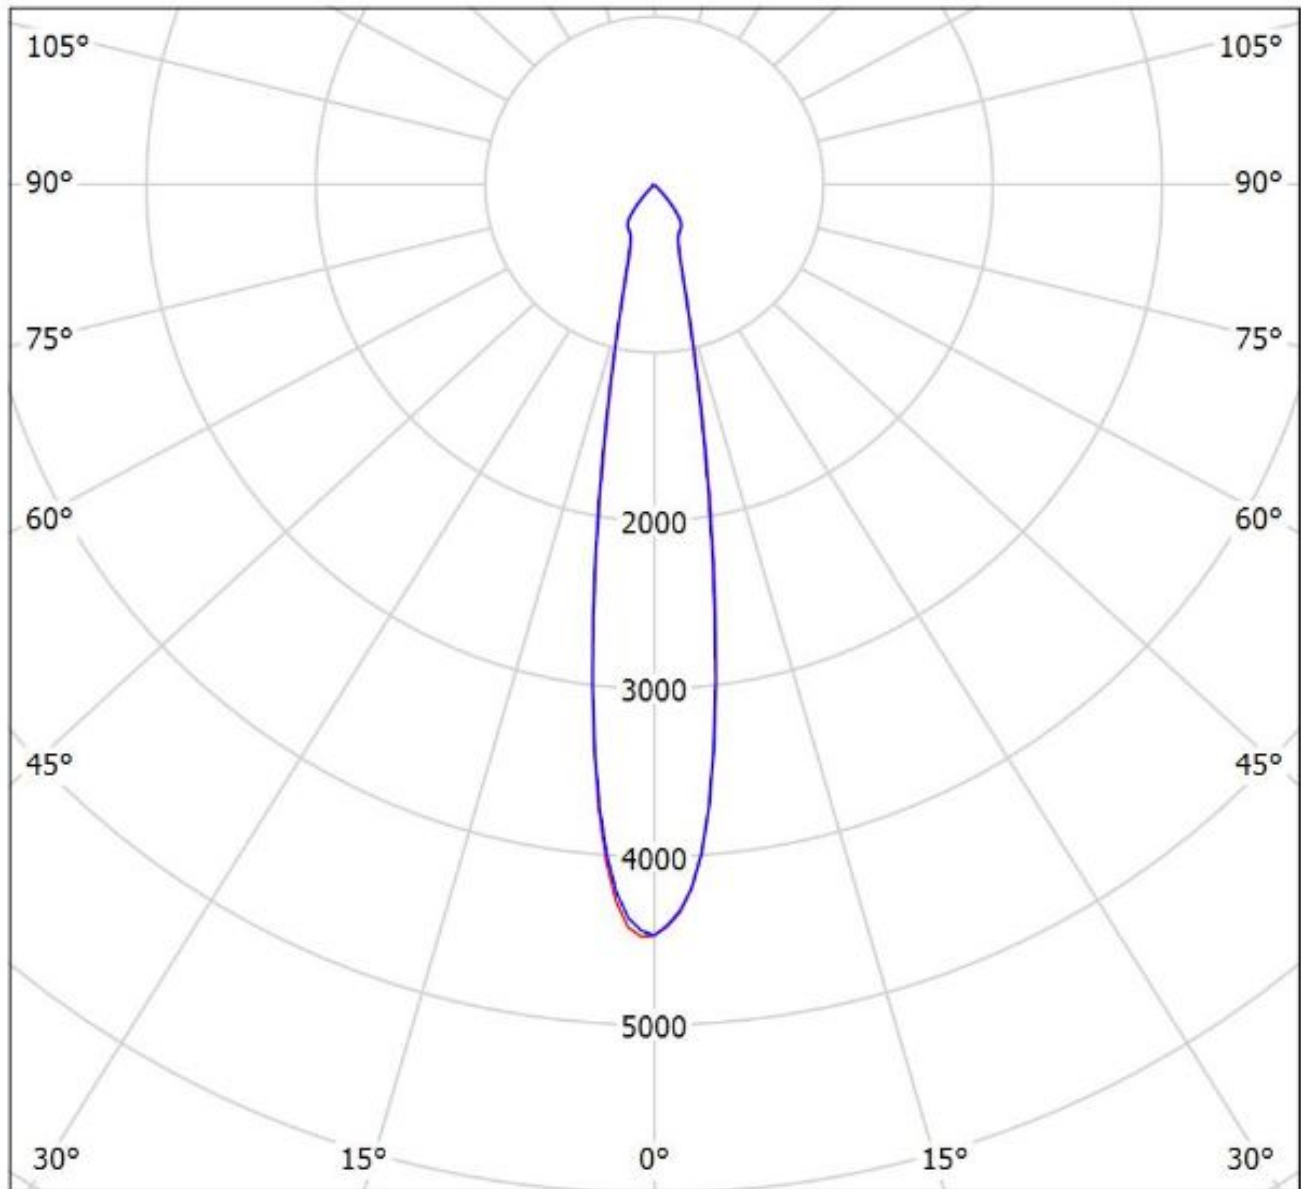


cd/klm
— C0 - C180 — C90 - C270

$\eta = 88\%$

Luminaire: LEDiL Oy F14624_ ANGELETTE-S-B-PLAIN_(COB_D_14,5mm)

Lamps: 1 x Samsung_COB_D_Series-LES-14,5_LC026D_1296.34lm@250mA_CCT=3000K_P=8.1225W_I=0.250A

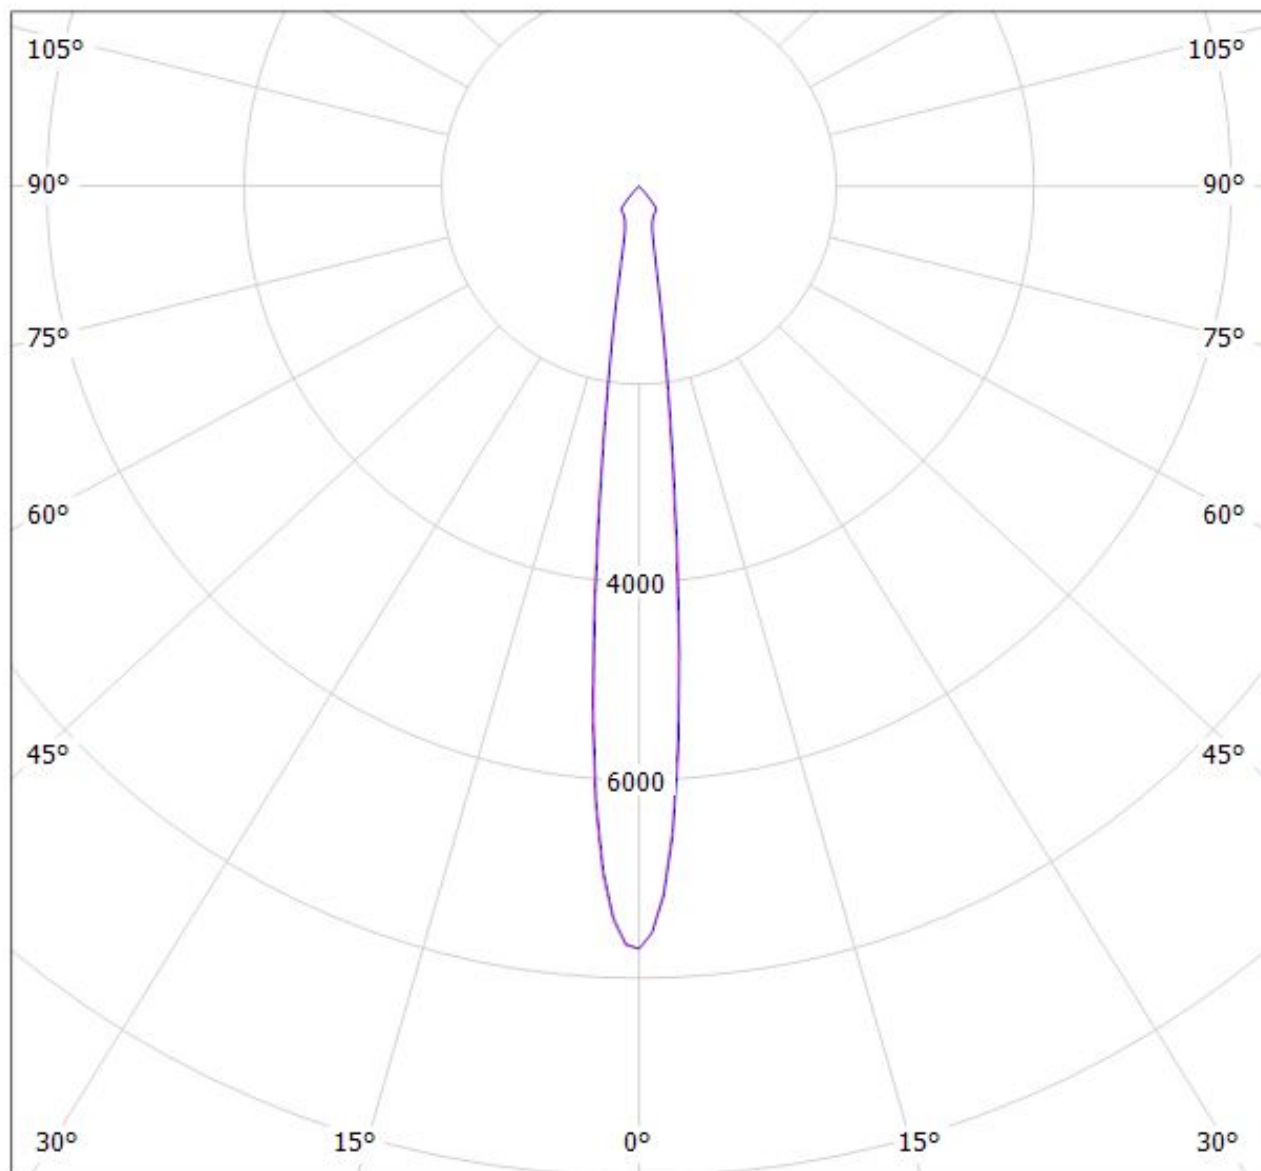

cd/klm


— C0 - C180

— C90 - C270

$\eta = 91\%$

Luminaire: LEDiL Oy F14624_ ANGELETTE-S-B-PLAIN_(COB_D_14,5mm)

Lamps: 1 x Samsung_COB_D_Series-LES-14,5_LC026D_1296.34lm@250mA_CCT=3000K_P=8.1225W_I=0.250A

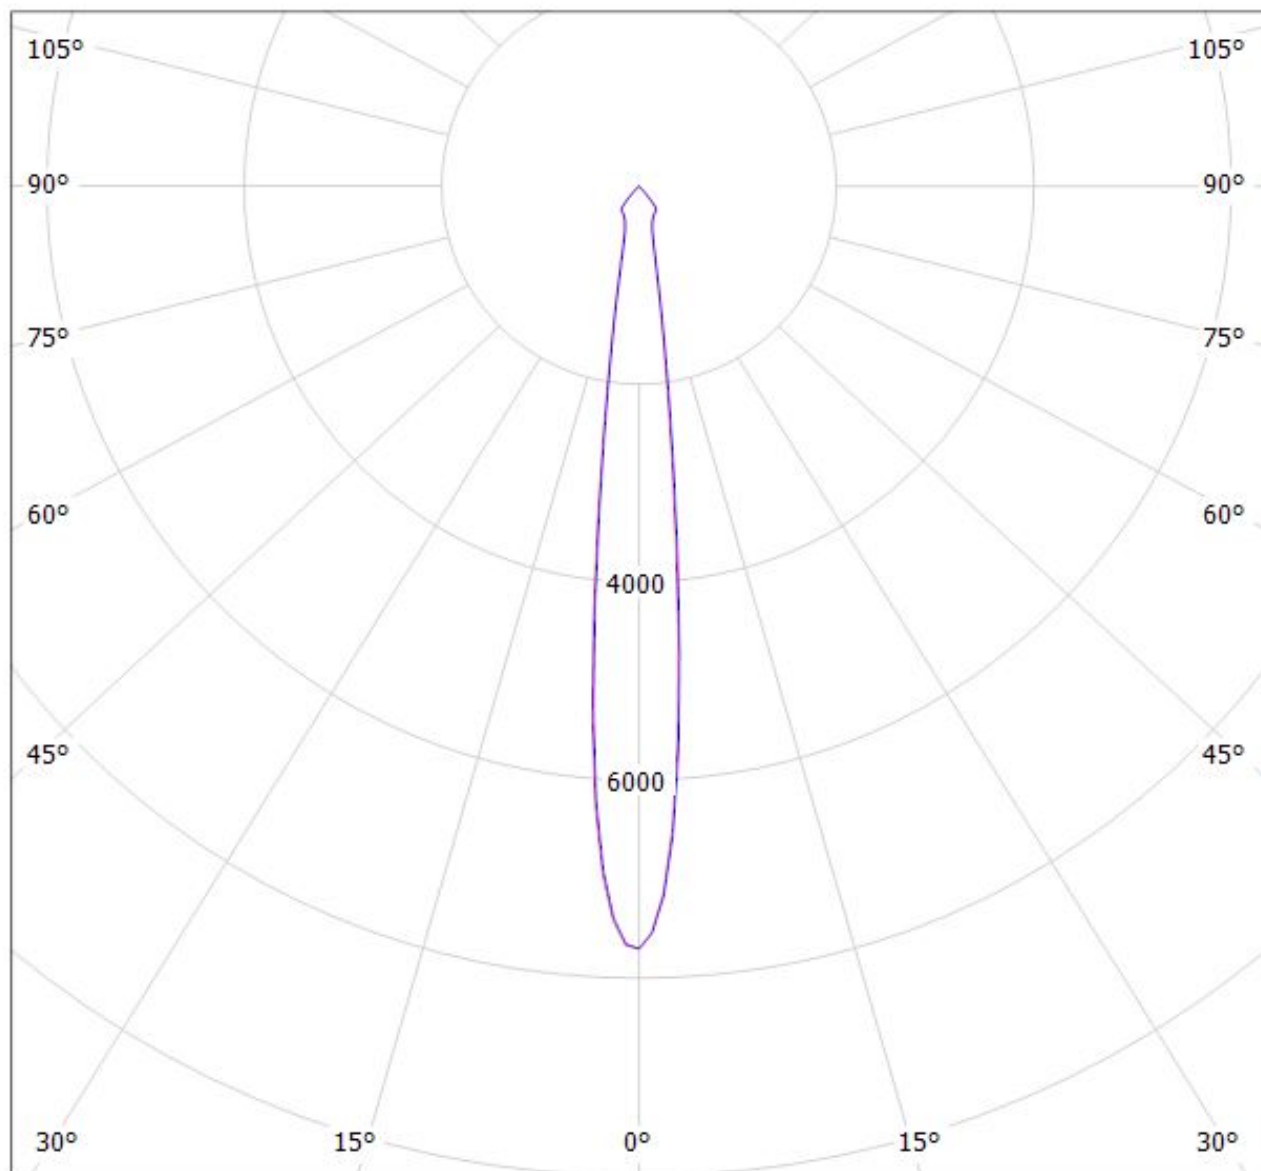

cd/klm

— C0 - C180

— C90 - C270

$\eta = 91\%$

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

GENERAL INFORMATION

- Product series especially designed & optimized for series of LEDs.
- Special care taken to make light distribution as uniform as possible.

Note! Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.