

L272/L272A

Dual Power Operational Amplifier

Features


- Output Current up to 0.7A
- Operates at Low Voltage ($V_{S(MIN)} = 4V$)
- Low Saturation Voltage ($I_p = 0.5A, V_O = 1.5V$)
- Thermal Shutdown ($TSD = 160^\circ C$)
- Ground Compatible Inputs
- Large Common Mode & Differential Mode Range

Applications



- Servo Amplifier
- Power Supply
- Compact Disc
- VCR
- Monitor

Description

The L272 and L272A are high-power dual operational amplifier provided as a 8-DIP and 16-SOP package. The operational amplifier is designed for low impedance loads and will deliver output current up to 0.7A. The L272A offers tighter specifications for input bias current, input offset voltage and input offset currents. The L272 and L272A can be used in a wide range of applications including power supply, VCR, monitor, servo amplifier, compact disc, etc.

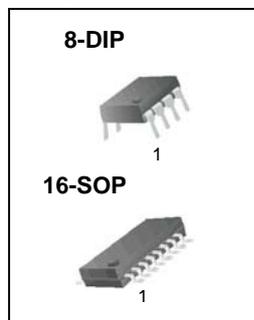

Internal Block Diagram

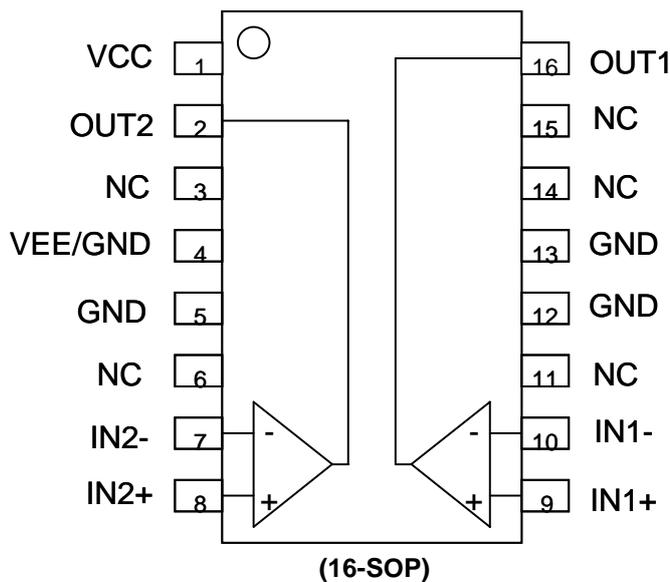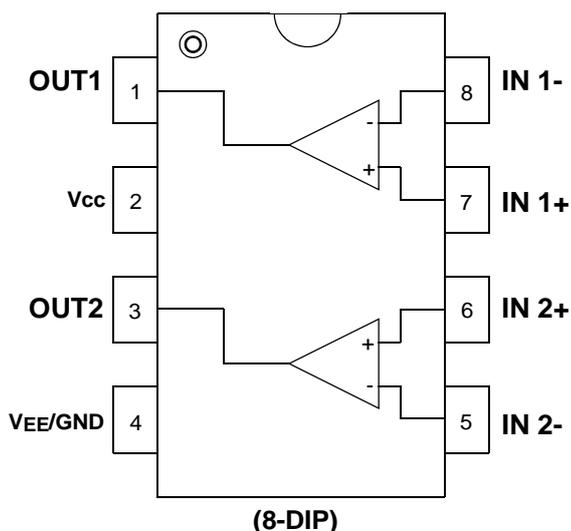

Pin Definitions

| Pin Number | | Pin Name | Pin Function Description |
|------------|-----------|----------|-------------------------------|
| 8-DIP | 16-SOP | | |
| 1 | 16 | OUTPUT1 | Amp Output 1 |
| 2 | 1 | VCC | Positive Supply Voltage |
| 3 | 2 | OUTPUT2 | Amp Output 2 |
| 4 | 4/5/12/13 | VEE/GND | Negative Supply Voltage (GND) |
| 5 | 7 | INPUT-2 | Amp Negative Input 2 |
| 6 | 8 | INPUT+2 | Amp Positive Input 2 |
| 7 | 9 | INPUT+1 | Amp Positive Input 1 |
| 8 | 10 | INPUT-1 | Amp Negative Input 1 |

Absolute Maximum Ratings (Note1)

| Parameter | Symbol | Value | Unit |
|---|-----------------------------------|-----------------|------|
| Supply Voltage | VCC | 40 | V |
| Input Voltage | V _I | V _S | V |
| Differential Input Voltage | V _{I(DIFF)} | ±V _S | V |
| DC Output Current | I _O | 0.7 | A |
| Peak Output Current (Non Repetitive) | I _P | 1 | A |
| Power Dissipation At: T _{amb} = 50°C | P _{tot} | 1 | W |
| Operating Temperature Range | T _{op} | -25 to 85 | °C |
| Storage and Junction Temperature | T _{stg} , T _j | -40 to 150 | °C |

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings.

Thermal Data

| Parameter | Symbol | Value | Unit |
|---|------------------|------------|------|
| Thermal Resistance Junction-Ambient Max. 8-DIP 16-SOP | R _{θja} | 100 190 | °C/W |

Electrical Characteristics (L272)

($V_{CC} = +12V$, $V_{EE} = -12V$, $T_A = 25^{\circ}C$ unless otherwise specified)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|--------------------------------------|------------|--|----------|------------|----------|-------------|
| Supply Voltage ($V_{CC} - V_{EE}$) | V_S | - | 4 | - | 28 | V |
| Supply Current | I_S | $V_O = V_{CC}/2$ $V_{CC} = 24V, V_{EE} = 0V$ $V_{CC} = 12V, V_{EE} = 0V$ | - | 8 7.5 | 12 11 | mA mA |
| Input Bias Current | I_{BIAS} | - | - | 0.3 | 2.5 | μA |
| Input Offset Voltage | V_{IO} | - | - | 15 | 60 | mV |
| Input Offset Current | I_{IO} | - | - | 50 | 250 | nA |
| Slew Rate | SR | $V_{in} = 1V_{pp}$, Unit Gain | - | 1 | - | V/ μs |
| Gain-Bandwidth Product | GBW | - | - | 350 | - | kHz |
| Input Resistance | R_I | - | 500 | - | - | k Ω |
| Large-Signal Voltage Gain | G_V | $V_{O(pp)} = \pm 10V$ | 65 | 75 | - | dB |
| Input Noise Voltage | e_N | $B = 20kHz$ | - | 10 | - | μV |
| Input Noise Current | I_N | $B = 20kHz$ | - | 200 | - | pA |
| Common Mode Rejection Ratio | CMRR | - | 60 | 75 | - | dB |
| Supply Voltage Rejection Ratio | PSRR | $V_{CC} = +15V, V_{EE} = -15V$ $V_{CC} = +5V, V_{EE} = -5V$ | 54 | 62 | - | dB |
| Output Voltage Swing | V_O | $V_{CC} = 24V, V_{EE} = 0V$ $I_p = 0.1A$ $I_p = 0.5A$ | 21 21 | 23 22.5 | - - | V V |
| Channel Separation | C_S | $f = 1kHz, R_L = 10\Omega,$ $G_V = 30dB$ | - | 60 | - | dB |
| Total Harmonic Distortion | THD | $f = 1kHz, G_V = 1dB, R_L = \infty$ | - | 0.5 | - | % |
| Thermal shutdown Temperature (Note2) | TSD | - | - | 160 | - | $^{\circ}C$ |

Note 2: Guaranteed by design. Not 100% tested in production.

Electrical Characteristics (L272A)($V_{CC} = +12V$, $V_{EE} = -12V$, $T_A = 25^\circ C$ unless otherwise specified)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|--------------------------------------|------------|--|----------|------------|----------|------------|
| Supply Voltage ($V_{CC} - V_{EE}$) | V_S | - | 4 | - | 28 | V |
| Supply Current | I_S | $V_O = V_{CC}/2$ $V_{CC} = 24V, V_{EE} = 0V$ $V_{CC} = 12V, V_{EE} = 0V$ | - | 8 7.5 | 12 11 | mA mA |
| Input Bias Current | I_{BIAS} | - | - | 0.1 | 1 | μA |
| Input Offset Voltage | V_{IO} | - | - | 7 | 30 | mV |
| Input Offset Current | I_{IO} | - | - | 20 | 100 | nA |
| Slew Rate | SR | $V_{in} = 1V_{pp}$, Unit Gain | - | 1 | - | $V/\mu s$ |
| Gain-Bandwidth Product | GBW | - | - | 350 | - | kHz |
| Input Resistance | R_I | - | 500 | - | - | $k\Omega$ |
| Large-Signal Voltage Gain | G_V | $V_{O(pp)} = \pm 10V$ | 65 | 75 | - | dB |
| Input Noise Voltage | e_N | $B = 20kHz$ | - | 10 | - | μV |
| Input Noise Current | I_N | $B = 20kHz$ | - | 200 | - | pA |
| Common Mode Rejection Ratio | CMRR | - | 60 | 75 | - | dB |
| Supply Voltage Rejection Ratio | PSRR | $V_{CC} = +15V, V_{EE} = -15V$ $V_{CC} = +5V, V_{EE} = -5V$ | 54 | 62 | - | dB |
| Output Voltage Swing | V_O | $V_{CC} = 24V, V_{EE} = 0V$ $I_p = 0.1A$ $I_p = 0.5A$ | 21 21 | 23 22.5 | - - | V V |
| Channel Separation | C_S | $f = 1kHz, R_L = 10\Omega,$ $G_V = 30dB$ | - | 60 | - | dB |
| Total Harmonic Distortion | THD | $f = 1kHz, G_V = 1dB, R_L = \infty$ | - | 0.5 | - | % |
| Thermal shutdown Temperature (Note3) | TSD | - | - | 160 | - | $^\circ C$ |

Note 3 : Guaranteed by design. Not 100% tested in production.

Typical Performance Characteristics

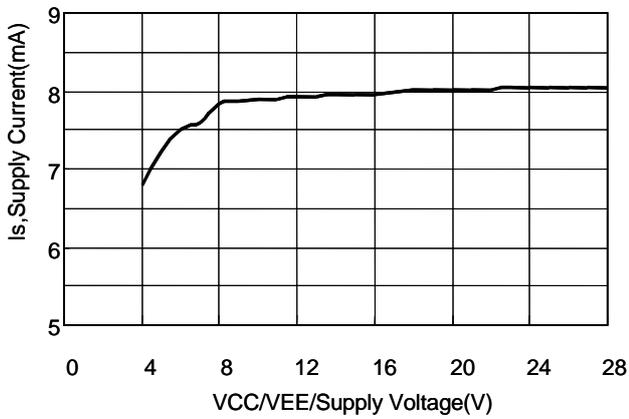


Figure 1. Supply Voltage vs Supply Current with No Load

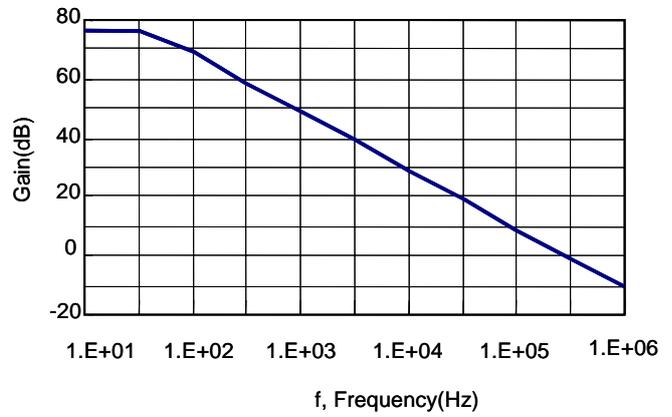


Figure 2. Open Loop Voltage Gain

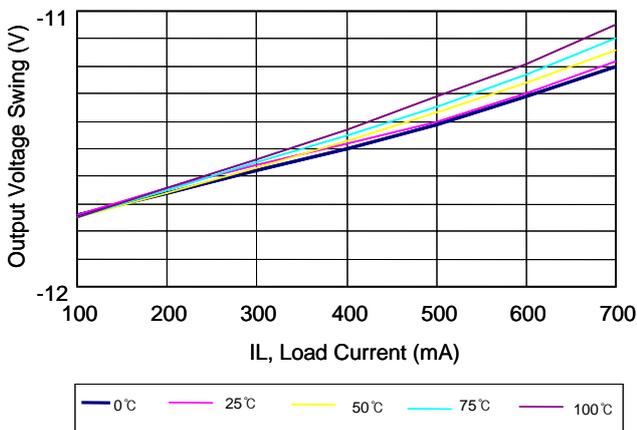


Figure 3-1. Output Voltage Swing vs Load Current

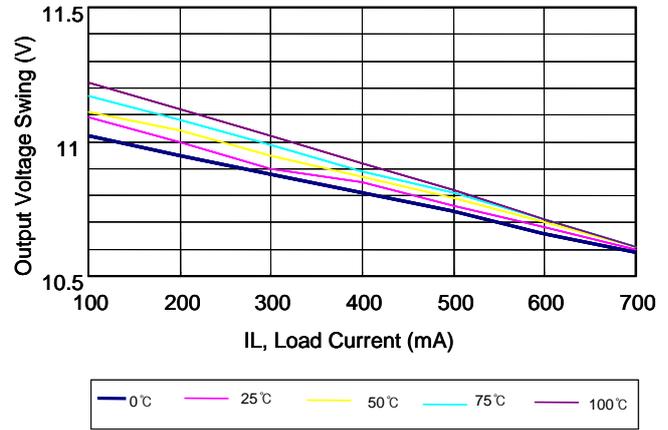


Figure 3-2. Output Voltage Swing vs Load Current


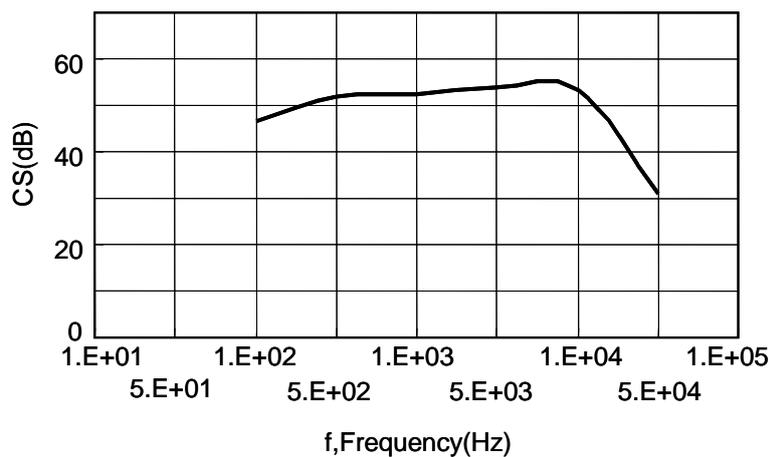


Figure 4. Channel Separation vs Frequency

Applications

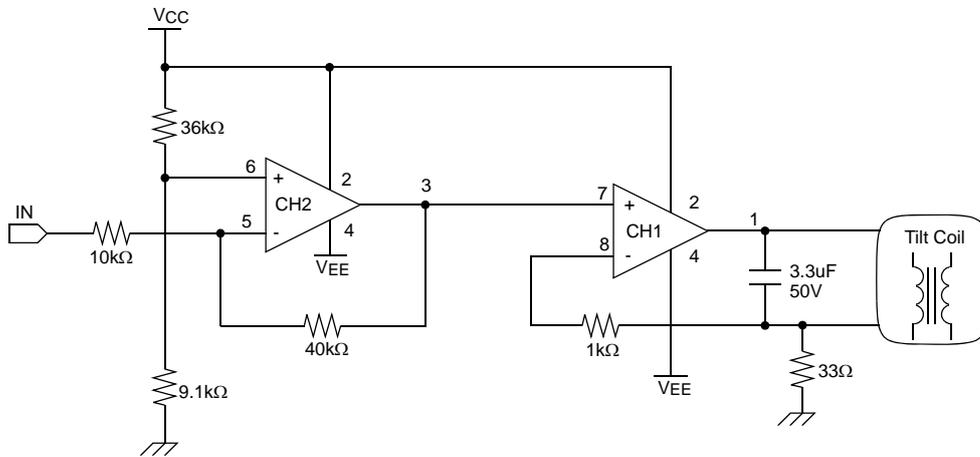


< Tilt Coil Current Control Circuit in Monitor, 8-DIP Package >

Mechanical Dimensions

Package

Dimensions in millimeters

8-DIP

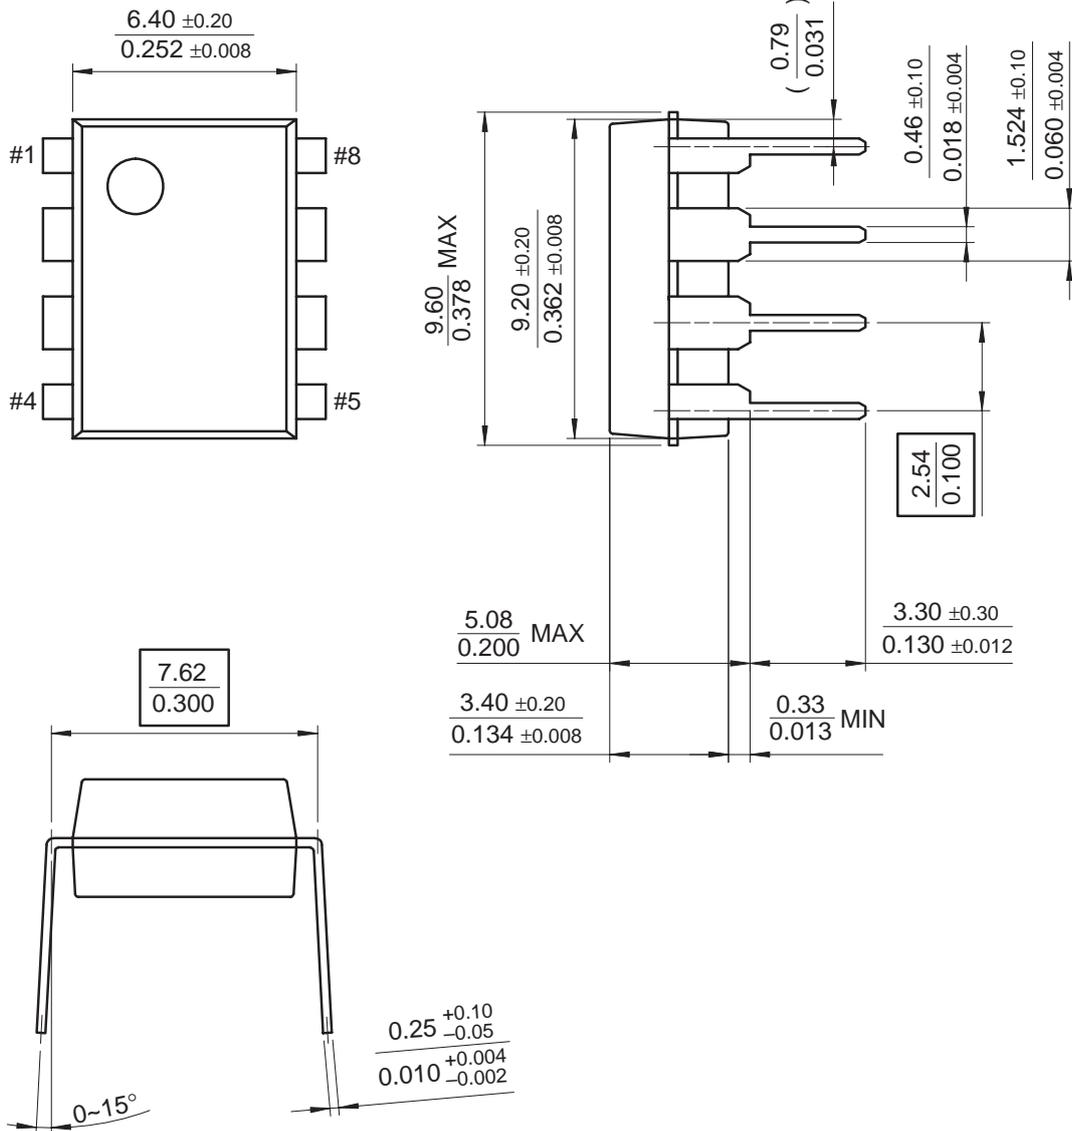


Mechanical Dimensions (Continued)

Package

Dimensions in millimeters

16-SOP

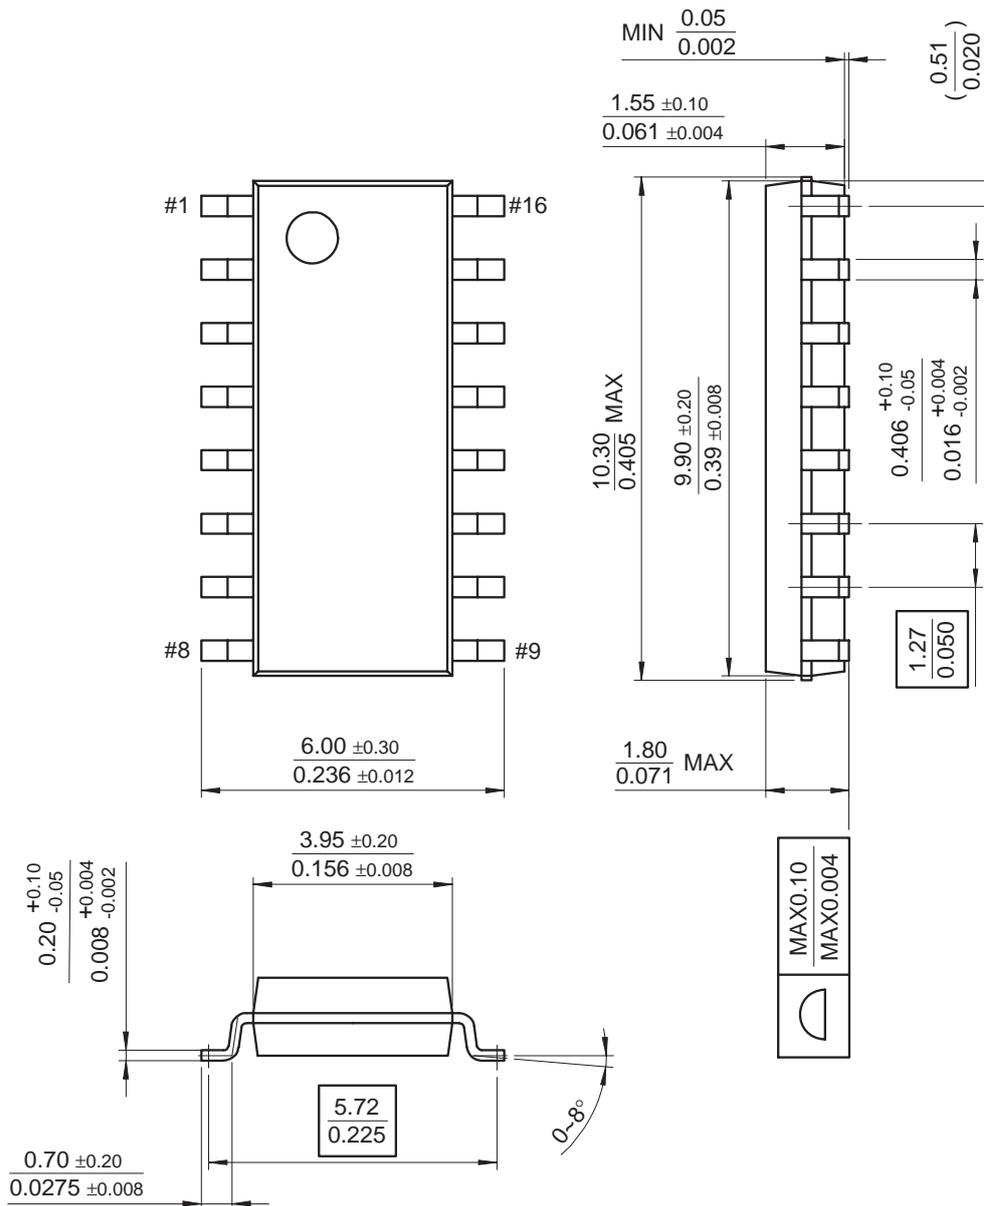

Ordering Information

| Product Number | Package | Packing | Operating Temperature |
|----------------|---------|---------------|-----------------------|
| L272M | 8-DIP | Tube | -25°C ~ +85°C |
| L272D2 | 16-SOP | Tube | |
| L272D2TF | 16-SOP | Tape and Reel | |
| L272AM | 8-DIP | Tube | |
| L272AD2 | 16-SOP | Tube | |
| L272AD2TF | 16-SOP | Tape and Reel | |

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.