Identification	Cable entry	Size	Part number	Drawing Dimensions in mm
Han® HPR, Hoods, top entry, screw locking, enlarged 	4xM25		19 40 024 0478	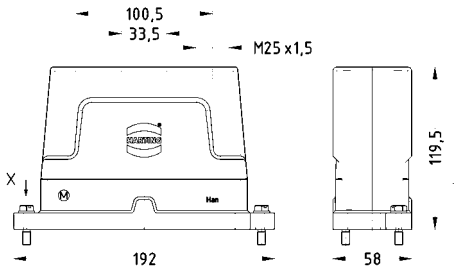
Hexagonal adapter, with O-ring to reach the electrical data up to 350 A 4000 V 18 kV 3		M25	19 36 000 5134	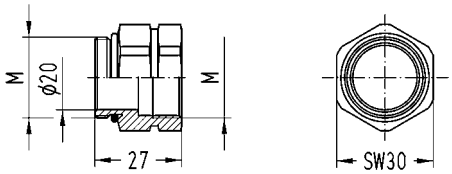
Frame, for male inserts, Han® HC Modular 350, 4 pins Range of delivery: 4 x M4 screw, 4 x washer SK S4, 4 x washer SK S6, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 35, 4 x heat shrink tube 			09 11 000 9964	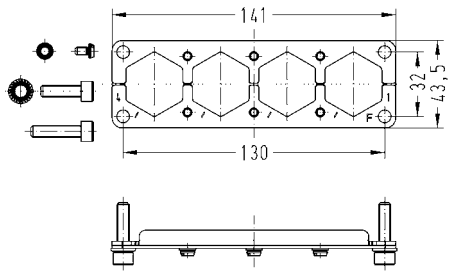 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm

HC-Modular