

# International IR Rectifier

322CNQ030

SCHOTTKY RECTIFIER

300 Amp


**Major Ratings and Characteristics**

Characteristics	322CNQ030	Units
I <sub>F(AV)</sub> Rectangular waveform	300	A
V <sub>RRM</sub>	30	V
I <sub>FSM</sub> @ tp = 5 µs sine	10000	A
V <sub>F</sub> @ 150 Apk, T <sub>J</sub> = 125°C (per leg)	0.49	V
T <sub>J</sub> range	-55 to 150	°C

**Description/ Features**

The 322CNQ030 center tap Schottky rectifier module series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150 °C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150 °C T<sub>J</sub> operation
- High Surge Capability
- Center tap module
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Low profile, high current package

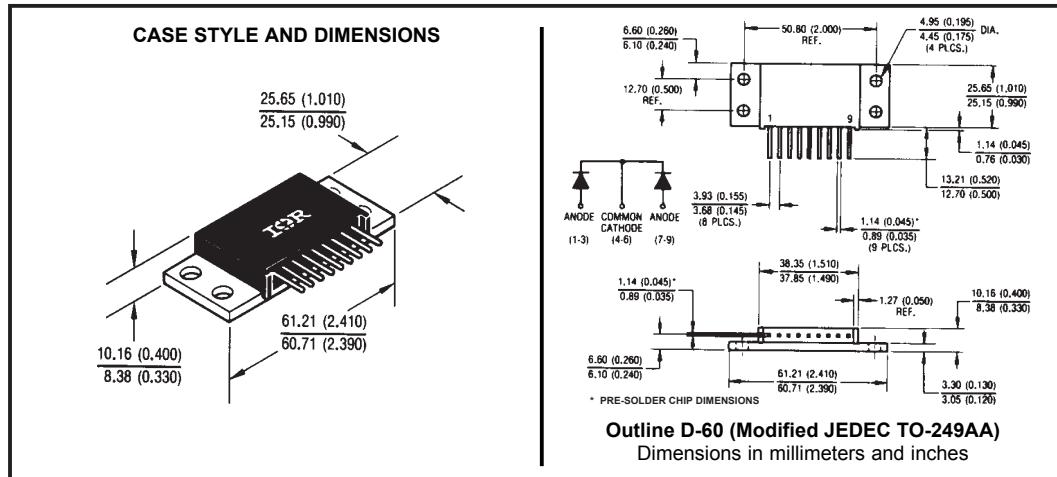

### Voltage Ratings

Part number	322CNQ030	
$V_R$ Max. DC Reverse Voltage (V)		30
$V_{RWM}$ Max. Working Peak Reverse Voltage (V)		

### Absolute Maximum Ratings

Parameters	322CNQ	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current (Per Leg)	300	A	50% duty cycle @ $T_J = 87^\circ\text{C}$ , rectangular wave form
	150	A	
$I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg)	10000	A	5μs Sine or 3μs Rect. pulse Following any rated load condition and with 10ms Sine or 6ms Rect. pulse applied
	1500		
$E_{AS}$ Non-Repetitive Avalanche Energy (Per Leg)	15	mJ	$T_J = 25^\circ\text{C}$ , $I_{AS} = 1$ Amps, $L = 30$ mH
$I_{AR}$ Repetitive Avalanche Current (Per Leg)	1	A	Current decaying linearly to zero in 1 μsec Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical


### Electrical Specifications

Parameters	322CNQ	Units	Conditions
$V_{FM}$ Max. Forward Voltage Drop (Per Leg)	0.56	V	@ 150A
	0.70	V	
	0.49	V	@ 150A
	0.68	V	@ 300A
$I_{RM}$ Max. Reverse Leakage Current (Per Leg)	10	mA	$T_J = 25^\circ\text{C}$
	650	mA	$T_J = 125^\circ\text{C}$
$C_T$ Max. Junction Capacitance (Per Leg)	5500	pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$
$L_S$ Typical Series Inductance (Per Leg)	8.0	nH	Measured from terminal hole to terminal hole
$dv/dt$ Max. Voltage Rate of Change (Rated $V_R$ )	10000	V/ μs	


(1) Pulse Width < 300μs, Duty Cycle <2%

### Thermal-Mechanical Specifications


Parameters	322CNQ	Units	Conditions
$T_J$ Max. Junction Temperature Range	-55 to 150	°C	
$T_{stg}$ Max. Storage Temperature Range	-55 to 150	°C	
$R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Leg)	0.50	°C/W	DC operation
$R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Package)	0.25	°C/W	DC operation
$R_{thCS}$ Typical Thermal Resistance, Case to Heatsink	0.10	°C/W	Mounting surface, smooth and greased
wt Approximate Weight	58 (2.0)	g(oz.)	
T Mounting Torque	Min.	40 (35)	Kg-cm (lbf-in)
	Max.	58 (50)	
Case Style	TO - 249AA		JEDEC

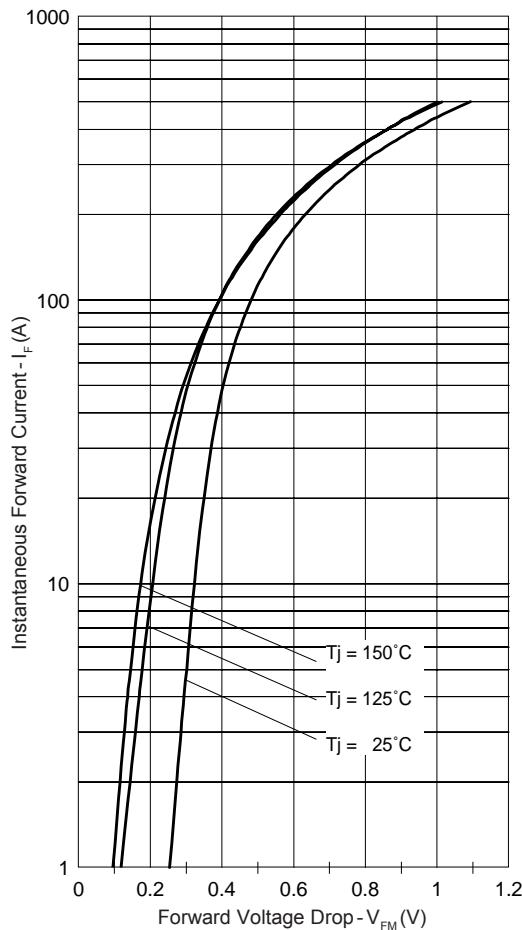


**Fig. 1 - Max. Forward Voltage Drop Characteristics**

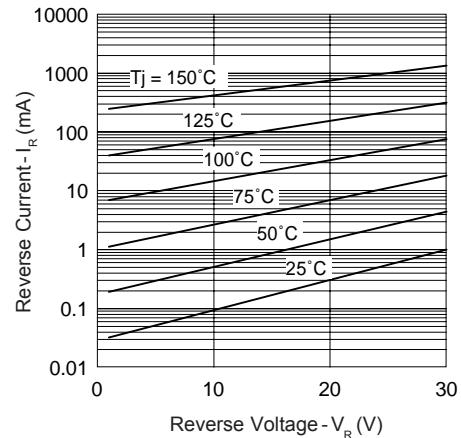


**Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage**

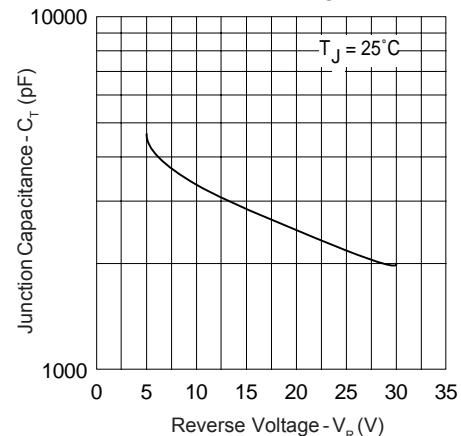


**Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage**

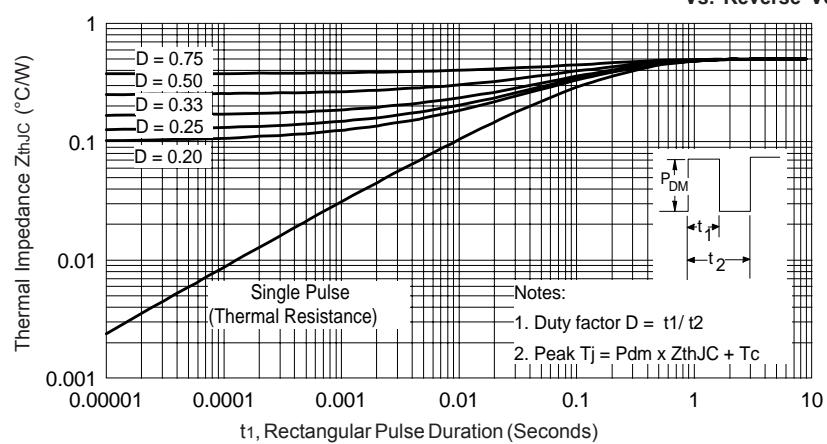


**Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics**

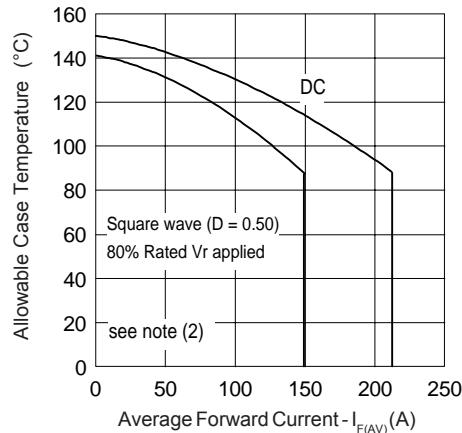


**Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current**

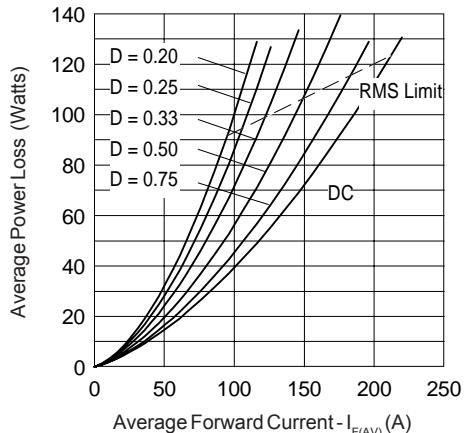

**Fig. 6 - Forward Power Loss Characteristics**

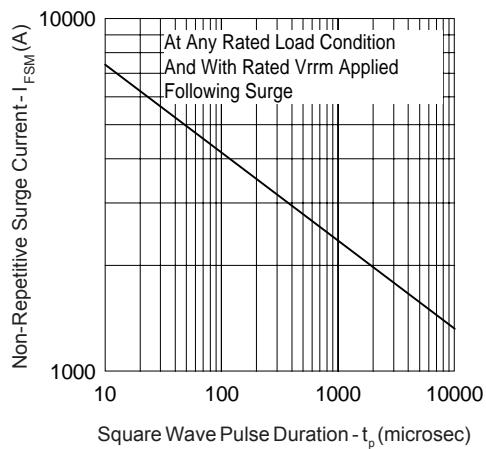

**Fig. 7 - Max. Non-Repetitive Surge Current**

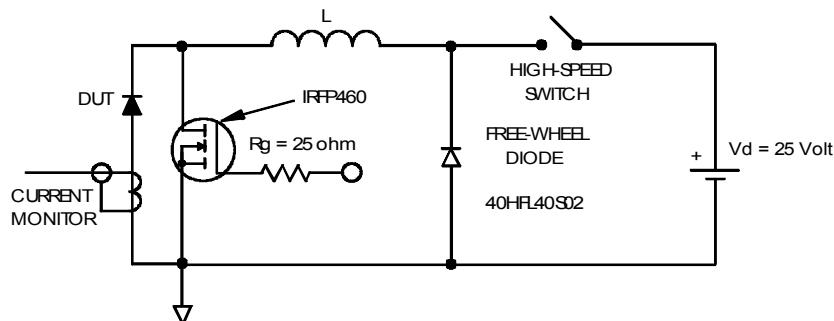

**Fig. 8 - Unclamped Inductive Test Circuit**

- (2) Formula used:  $T_c = T_j - (P_d + P_{d_{REV}}) \times R_{thJC}$ ;  
 $P_d = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);  
 $P_{d_{REV}} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D)$ ;  $I_R @ V_{R1} = 80\%$  rated  $V_R$

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level.  
Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 08/03