





Miniature Sized, Low Impedance,
High Reliability For
Switching Power Supplies

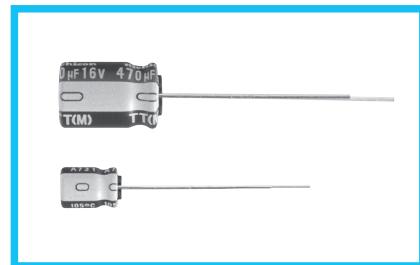


- Smaller case size and Long Life product.
- Compliant to the RoHS directive (2011/65/EU).



■ Specifications

Item	Performance Characteristics																											
Category Temperature Range	-40 to +105°C																											
Rated Voltage Range	6.3 to 50V																											
Rated Capacitance Range	1 to 470μF																											
Capacitance Tolerance	±20% at 120Hz, 20°C																											
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is less than 0.03CV or 3 (μA), whichever is greater.																											
Tangent of loss angle (tan δ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>tan δ (MAX.)</td> <td>0.30</td> <td>0.28</td> <td>0.24</td> <td>0.18</td> <td>0.16</td> <td>0.14</td> </tr> </tbody> </table>							Rated voltage (V)	6.3	10	16	25	35	50	tan δ (MAX.)	0.30	0.28	0.24	0.18	0.16	0.14							
Rated voltage (V)	6.3	10	16	25	35	50																						
tan δ (MAX.)	0.30	0.28	0.24	0.18	0.16	0.14																						
Stability at Low Temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Impedance ratio Z-25°C / Z+20°C</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> <tr> <td>ZT / Z20 (MAX.) Z-40°C / Z+20°C</td> <td>10</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> </tr> </tbody> </table>							Rated voltage (V)	6.3	10	16	25	35	50	Impedance ratio Z-25°C / Z+20°C	5	4	3	3	3	3	ZT / Z20 (MAX.) Z-40°C / Z+20°C	10	10	8	6	4	4
Rated voltage (V)	6.3	10	16	25	35	50																						
Impedance ratio Z-25°C / Z+20°C	5	4	3	3	3	3																						
ZT / Z20 (MAX.) Z-40°C / Z+20°C	10	10	8	6	4	4																						
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 5000 hours at 105°C.				Capacitance change	Within ±30% of the initial capacitance value																						
					tan δ	300% or less than the initial specified value																						
					Leakage current	Less than or equal to the initial specified value																						
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																											
Marking	Printed with white color letter on dark blown sleeve.																											


■ Radial Lead Type

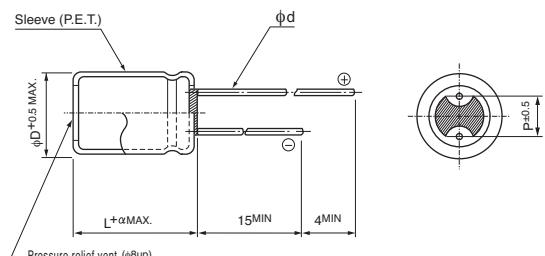

(mm)					
α	(L = 7) 1.0	(L ≥ 9) 1.5	φD	4	5
			P	1.5	2.0
			φd	0.45	0.45

() : Applied to 7mmL products

Type numbering system (Example : 25V 100μF)

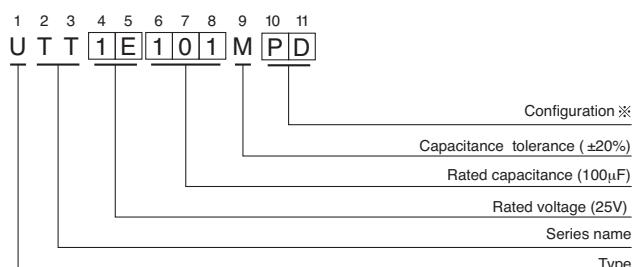

※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
4 to 6.3	DD
8	PD

- Please refer to page 20 about the end seal configuration.

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

- Dimension table in next page.

UTT

■ Standard Ratings

Cap.(μF)	V (Code)	6.3 (0J)			10 (1A)			16 (1C)			
		Item Code	Case size φD × L (mm)	Impedance (Ω) MAX. 20°C / 100kHz	Rated ripple (mA rms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (Ω) MAX. 20°C / 100kHz	Rated ripple (mA rms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (Ω) MAX. 20°C / 100kHz	Rated ripple (mA rms) 105°C / 100kHz
10	100								4 × 7	7.4	46
22	220	4 × 7	7.4	46				5 × 7	4.0	74	
33	330				5 × 7	4.0	74				
47	470	5 × 7	4.0	74				6.3 × 7	2.1	120	
100	101	6.3 × 7	2.1	120				6.3 × 9	1.1	163	
150	151				6.3 × 9	1.1	163	8 × 9	0.68	230	
220	221	6.3 × 9	1.1	163	8 × 9	0.68	230	8 × 9	0.68	230	
330	331	8 × 9	0.68	230				8 × 9	0.68	230	
470	471	8 × 9	0.68	230				8 × 11.5	0.40	298	

Cap.(μF)	V (Code)	25 (1E)			35 (1V)			50 (1H)			
		Item Code	Case size φD × L (mm)	Impedance (Ω) MAX. 20°C / 100kHz	Rated ripple (mA rms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (Ω) MAX. 20°C / 100kHz	Rated ripple (mA rms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (Ω) MAX. 20°C / 100kHz	Rated ripple (mA rms) 105°C / 100kHz
1	010								4 × 7	30	23
2.2	2R2								4 × 7	23	26
3.3	3R3								4 × 7	20	29
4.7	4R7				4 × 7	7.4	37	5 × 7	14	37	
10	100				5 × 7	4.0	74	6.3 × 7	4.4	84	
22	220	5 × 7	4.0	74	6.3 × 7	2.1	120	6.3 × 9	2.4	112	
33	330	6.3 × 7	2.1	120	6.3 × 9	1.1	163				
47	470	6.3 × 9	1.1	163	6.3 × 9	1.1	163	8 × 9	1.4	162	
100	101	8 × 9	0.68	230							
150	151										
220	221	8 × 11.5	0.40	298							
330	331	8 × 11.5	0.40	298							

● Frequency coefficient of rated ripple current

Cap.(μF)	Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	100kHz or more
1 to 4.7		0.25	0.30	0.50	0.70	0.90	1.00
10 to 47		0.30	0.40	0.60	0.75	0.90	1.00
100 to 470		0.60	0.60	0.70	0.80	0.90	1.00