


SAC-5P-M12MS CAN TR

Order No.: 1507816

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507816>

Terminating resistor CANopen/DeviceNet™ M12

Commercial data

GTIN (EAN)	 4 017918 900410
sales group	D199
Pack	5 pcs.
Customs tariff	85366990
Catalog page information	Page 296 (PC-2009)

Product notesWEEE/RoHS-compliant since:
11/16/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**General data**

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	5
Ambient temperature (operation)	-25 °C ... 90 °C (connector)

General characteristics

Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/IP67/IP69K
Insertion/withdrawal cycles	≥ 100
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, (nickel-plated)
Status display	No

Certificates / Approvals




Certification

GOST


Diagrams/Drawings

Dimensioned drawing

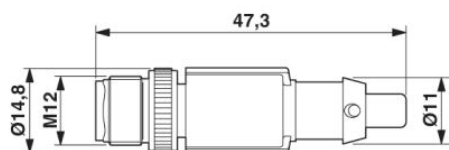


M12 x 1 male connector, straight

Circuit diagram

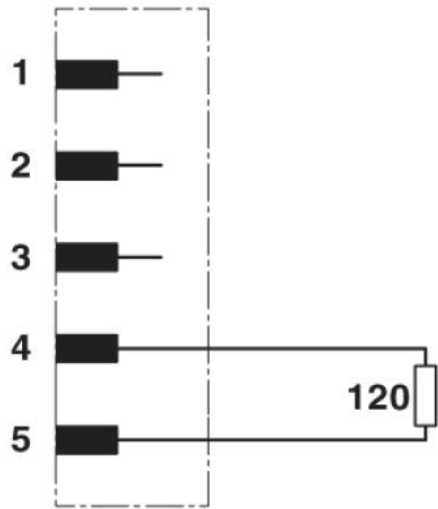

Internal wiring of connections

Schematic diagram

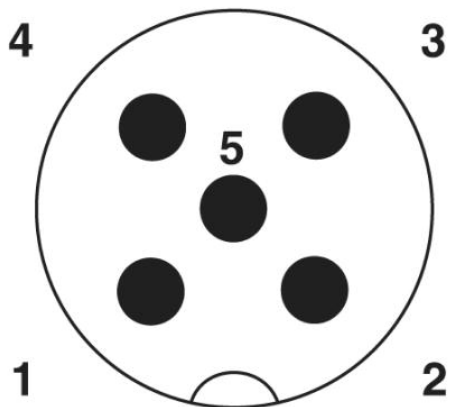

Pin assignment M12 male connector, 5-pos., A-coded, male side

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;