

REFERENCE STANDARD IEC60169-16

1.ELECTRIC PERFORMANCE:  
 NOMINAL IMPEDANCE( $\Omega$ ) : 50  
 FREQUENCY RANGE : DC-6 GHz  
 VSWR :  $\leq 1.10$   
 PIM(dBc) :  $\leq -160$  (2X43dBm)  
 INSERT LOSS :  $\leq 0.05$   
 INSULATION RESISTANCE ( $M\Omega$ ) :  $\geq 5000$   
 PROOF VOLTAGE (V) : 1500  
 CONDUCTOR RESISTANCE ( $m\Omega$ ) : OUTER CONDUCTOR<0.4  
 INNER CONDUCTOR<0.8

2.MECHANICAL PERFORMANCE:  
 NUT TORQUE : 5N.m  
 (NUT WHORL) PULL : 500N  
 TENSILE FORCE (CABLE-CONNECTOR) : 150N  
 TORSION(CABLE-CONNECTOR) : 0.3N.m


3.MATERIAL AND PLATING:  
 INNER CONDUCTOR : BRASS PLATING Ag5um  
 OUTER CONDUCTOR : BRASS PLATING COPPER-TIN-ZINC 2um  
 NUT : BRASS PLATING Ni5um  
 GASKET : SILICONE RUBBER  
 INSULATOR : PTFE

4.ENVIRONMENT:  
 TEMP.RANGE : -55°C TO +155°C  
 WEATHER STANDARD : IEC 60068 40/085/21  
 THERMAL SHOCK : US MIL-STD 202.Meth.107, COND.B  
 VIBRATION : US MIL-STD 202 Meth.204, COND.B  
 SHOCK : US MIL-STD 202.Meth.213, COND.I


5.ASSEMBLY: INNER AND OUTER CONDUCTOR SOLDERED

6.ROHS COMPLIANT.

172133-16		REVISIONS			
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ.	A	RELEASE TO MFG.	11-Oct-12	--	MG



SCALE 1.000

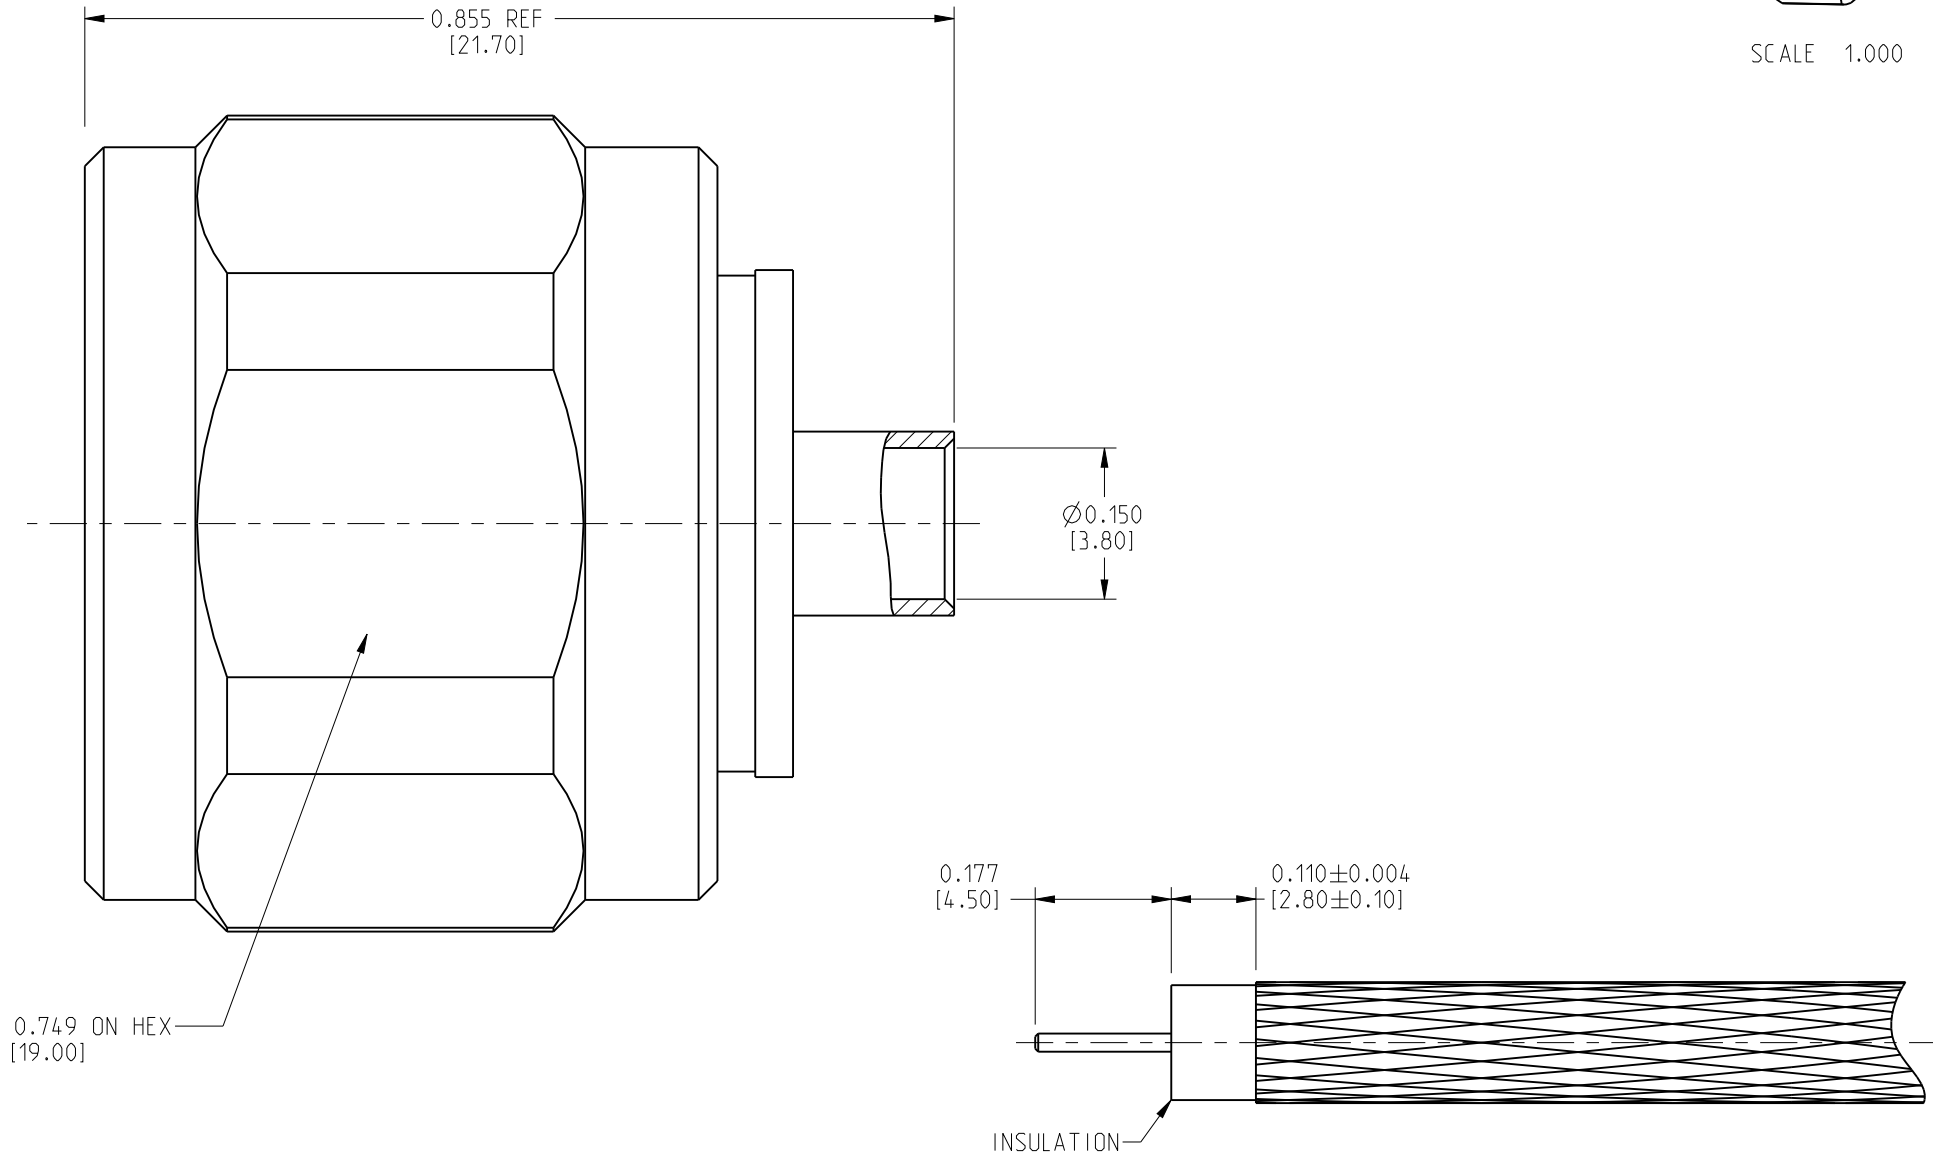

RECOMMENDED CABLE STRIPPING DIMENSIONS

5	NUT	BRASS	NICKEL	1
4	GASKET	SILICONE RUBBER		1
3	INSULATOR	PTFE	NATURAL	1
2	CONTACT PIN	BRASS	SILVER	1
1	BODY	BRASS	WHITE BRONZE	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:  
 2 PLACE DECIMAL ±.015 (0,381 mm)  
 3 PLACE DECIMAL ±.005 (0,127 mm)  
 ANGLES ± 1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL	SEE NOTES	DRAWN	GOPI M	DATE	11-Oct-12	TITLE N STRAIGHT PLUG FOR 0.141" SEMI-RIGID CABLE	Amphenol Connex
REFERENCE		ENGINEER	GOPI M	DATE	11-Oct-12		
		APPROVED		DATE			
		CAD FILE					
		DWG SIZE	B	DRAWING NO.	172133-16	SCALE: 5.0:1	SHEET 1 OF 1
							REV A