

3.3V/ 300mA Output


# Step-down DC/DC Converter(Non-isolated)

BP5224-33

## Absolute Maximum Ratings

Parameter	Symbol	Limits	Unit
Input voltage	Vi	24	V
Operating temperature	Topr	-20 to +80	°C
Storage temperature	Tstg	-25 to +105	°C
Maximum surface temperature	Tcmax	105	°C
Maximum output current	Iopeak	300	mA

## Dimensions (Unit : mm)

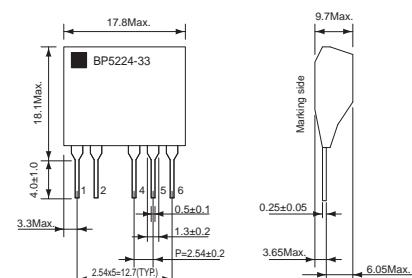

## Electrical Characteristics


Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input voltage	Vi	7.0	16.0	18.0	V	DC
Output voltage	Vo	3.14	3.3	3.46	V	
Output current	Io	—	—	300	mA	
Line regulation	Vr	—	0.03	0.10	V	Vi=7 to 18V
Load regulation	VI	—	0.07	0.15	V	Io=0 to 300mA
Output ripple voltage	Vp	—	0.06	0.15	Vp-p	
Power conversion efficiency	η	68	71	—	%	

\*1 Maximum output current varies depending on ambient temperature : please refer to derating curve.

\*2 The output ripple voltage may vary depending on the capacitance, environment, and location of peripheral components. Especially right attention has to be paid to aluminum electrolytic capacitor, because ESR changes greatly at the time of the low temperature and output ripple voltages increase.

## Application Circuit

BP5224-33

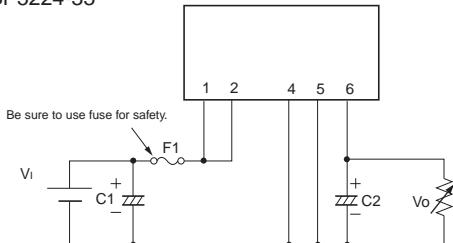

Pin No	Function
1	Input terminal Vi
2	Input terminal Vi
3	Skip
4	GND
5	GND
6	Output terminal Vo

Please verify operation and characteristics in the customer's circuit before actual usage.  
Ensure that the load current does not exceed the maximum rating.

### External Component Specifications

F1: FUSE

Be sure to use a fuse for safety.

C1: Input capacitor


Rated voltage : More than 50V  
Capacitance : more than 100μF, low impedance type  
Rated ripple current : More than 0.2Arms

C2: Output capacitor

Rated voltage : More than 10V  
Capacitance : 220 to 680μF, low impedance type  
Rated ripple current : More than 0.2Arms  
Evaluate under actual operating conditions since it affects the output ripple voltage.



## Conversion Efficiency

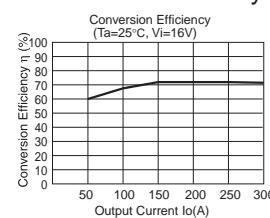

## Load Regulation

