

10/100/1000 Mbps Optical Ethernet Demarcation Unit

IE-Multiway



PRODUCT FEATURES

- Versatile 4 port device
- SNMP Manageable
- Supports SFP fibers
- Extended Temperature
- Supports OAM, VLAN, 1+1 Revertive
- RS-232 CLI (Command Line Interface) Console Port

The IE-MultiWay is a value-based, Carrier-class managed Gigabit Ethernet solution that is ideal for use as a CPE device at the customer's network edge as well as in a fiber infrastructure. The IE-MultiWay comes standard with two SFP uplink ports for the providers' network connection and two 10/100/1000Base-T copper ports.

There are four distinct DIP Switch selectable configurations that the IE-MultiWay supports. Among them are a 1+1 Uplink Protection revertive mode, 1+1 Uplink Protection non-revertive mode, a 4-port Gigabit Switch, and a Dual Copper to Fiber SFP Media/Mode Converter (two gigabit fiber media converters in one).

The IE-MultiWay is an ideal solution for service providers' fiber networks because it combines media conversion with an advanced features set for network management and trouble shooting, including port based VLAN and VLAN trunks, IEEE 802.1ad (Q-in-Q) and a user definable EtherType. Information such as interface statistics, RMON1 statistics, and OAM status and control are a few of the many accessible features from the Serial CLI, Telnet CLI and SNMP Management Software.

ACCESSORIES

- 806-39105 - DIN Rail Clip
- 806-39638 - Double-USB Power Cable, 36"/.9m
- 825-39951 - Serial Cable, MiniJack to DB9 (female)
- 895-39229 - Wall Mount Bracket

ORDERING INFORMATION

| MODEL NUMBER | FIBER | FIBER PORTS | ETHERNET PORTS | ETHERNET CONNECTOR |
|--|-------|-------------|----------------|--------------------|
| IE-Multiway With AC to DC Power Adapter | | | | |
| 858-11121 | *SFP | 2 | 2 | RJ45 |
| IE-Multiway With Out AC to DC Power Adapter | | | | |
| 854-11121 | *SFP | 2 | 2 | RJ45 |

* SFP modules are sold separately. Two (2) SFP transceivers are needed for full device functionality.

IE-SFP MODULES: 100 TO 155 MBPS

| MODEL NUMBER | DESCRIPTION | FIBER TYPE | RANGE | POWER BUDGET |
|--------------|-------------|------------|-------|--------------|
| 808-38101 | MM850 | LC | 2 km | 14.5 (db) |
| 808-38103 | SM1310 | LC | 15 km | 13 (db) |
| 808-38104 | SM1310/PLUS | LC | 40 km | 31 (db) |
| 808-38105 | SM1550/LONG | LC | 80 km | 31 (db) |

IE-SFP MODULES: 1 GBPS GIGABIT ETHERNET

| MODEL NUMBER | DESCRIPTION | FIBER TYPE | RANGE | POWER BUDGET |
|--------------|--------------|------------|-------|--------------|
| 808-38201 | MM850 | LC | 550 m | 7.5 (db) |
| 808-38202 | SM1310 | LC | 10 km | 13 (db) |
| 808-38203 | SM1310/PLUS | LC | 30 km | 17 (db) |
| 808-38204 | SM1550/LONG | LC | 40 km | 17 (db) |
| 808-38205 | SM1550/XLONG | LC | 70 km | 23 (db) |



IN THE FIELD
Intelligent Facilities:
Controlling Access & Security
 Industry: Security
 Product: IE-MultiWay Ethernet
 Media Converter



[www.bb-elec.com/
Access](http://www.bb-elec.com/Access)

Carrier data charges may apply.



iView: Windows 2000/XP/Vista/Win7

10/100/1000 Mbps Optical Ethernet Demarcation Unit

IE-Multiway



SPECIFICATIONS

TECHNICAL




- Plug-and-Play Operation
- 2 x RJ-45 and 2 x SFP ports (SFPs sold separately)
- IEEE 802.3i 10Base-T over twisted pair
- IEEE 802.3u 100Base-TX over twisted pair
- IEEE 802.3u 1000Base-T over twisted pair
- IEEE 802.3u 100Base-FX
- IEEE 802.3u 1000Base-X
- Jumbo Frames support (up to 10240 bytes)
- Auto Negotiation, Auto-Cross for MDI/MDIX
- Includes diagnostic LEDs
- 1+1 uplink protection (< 50 mSecs)
- Extended temperature range from -40° to +85° C
- 48 VDC terminal for Telco applications
- Compatible with all standard MSA compliant SFP transceivers

STANDARDS COMPLIANCE

- IEEE 802.3ah
- IEEE 802.1ag
- Y.1731
- SFP-MSA SFP standard (September 14, 2000)
- SFF-8472 DDMI standard (Revision 1.0)

MECHANICAL DIAGRAM

(dimensions in inches & millimeters)

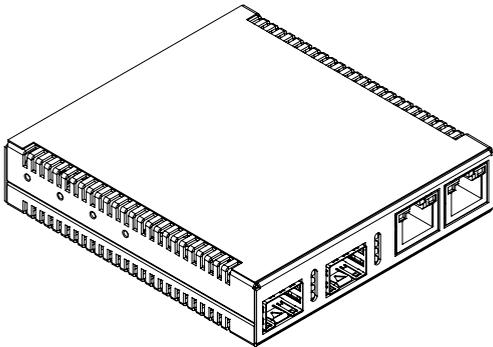

MECHANICAL

- Dimensions 0.86" H x 3.66" W x 3.88" D (2.2 x 9.38 x 9.94 cm)
- Enclosure Metal
- Shipping Weight 1.0 lbs (0.45 kg)

POWER

- 5 to 24 VDC (Barrel)
- 48 VDC Telco (Terminal)

POWER INFORMATION

- Min: 3.15W (1 optic SFP [1 Gbps], 1 Tx [100 Mbps])
- Max: 7.0W (2 Cu SFP [1 Gbps], 2 Tx [1 Gbps])

* Power consumption is based on SFP types

ENVIRONMENTAL

- Operating Temperature w/ Franmar AC Wall Adapter +14° to +122° F (-10° to +50° C)
- Operating Temperature w/DC Configuration -40° to +185° F (-40° to +85° C)
- Storage Temperature -49° to +185° F (-45° to +85° C)
- Operating Humidity 10 to 95% Non-condensing

REGULATORY APPROVALS

- FCC Class A (Using 48V Telco-type power)
- FCC Class B (Using all other power options)
- UL/cUL, CE

