

SUMMARY

Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series	3Y
Termination type	HV contact
IP rating	50
Cable Ø	0.00 - 6.00 mm
Matching parts	ERA.3Y.425.CLL
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FFR*: Straight plug for cable crimping with bend relief and safety ring
Keying	Circular (can rotate)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	∅ 0 - 6 mm
Variant	

Performance

Configuration	3Y.425 : 1 High Voltage
Insulator	F: Silicon (LSR)/ Y series
Rated Current	8 Amps


Specifications

Contact Type:	Solder
Test voltage (kV DC)	52
Test voltage (kV AC)	37
Creepage dist. (mm):	25.5

Others

DRAWINGS

Draws

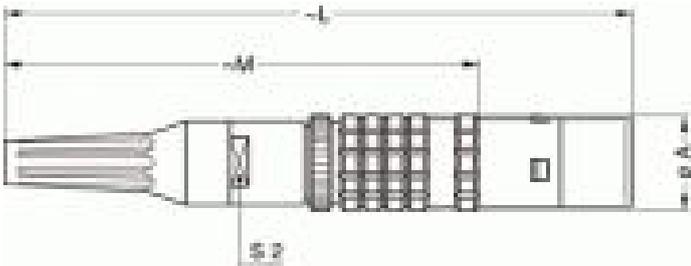

Dimensions

	A	L	M
mm.	19	120	92
in.	0,75	4,72	3,62

RECOMMENDED BY LEMO

Tools

None

Cables