Part Curves Page 1 of 2




Advanced Ferrite Materials, EMI Suppression, and Inductive Products

Home • Ferrite Product Lines • New Products • Technical • General • Contact • Steward Sales

LI0805H750R-00



Ambient Operating Temperature Range: -55°C to + 125°C




Electrical Characteristics

NET Z @ 100 MHz	DCR Max	Rated Current mA
75	0.15	800

Physical Dimensions

A	В	С	D	A	В	С	D
mm	mm	mm	mm	in	in	in	in
2.00	1.25	0.90	0.51	0.079	0.049	0.035	0.020

Part Curves Page 2 of 2

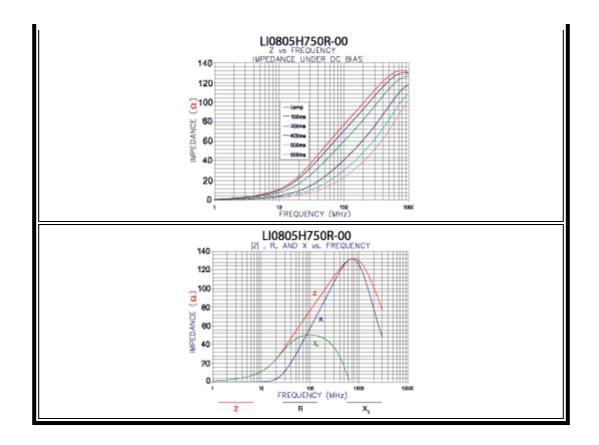

Specifications, which provide more details for the correct use of the described products, are available upon request. All specifications are subject to change without notice. For more information on any of the products listed above, please contact Steward customer service department at (800) 634-2673.

americas@steward.com	mexico@steward.com	europe@s teward.com	asia@stewa
amonoa o con ana coom	manage ata mara.com	coropo@storiala.com	aoia@otom

Last Updated: 2/19/2004

Copyright© 2004 Steward, Inc.