




# CT124/CS124

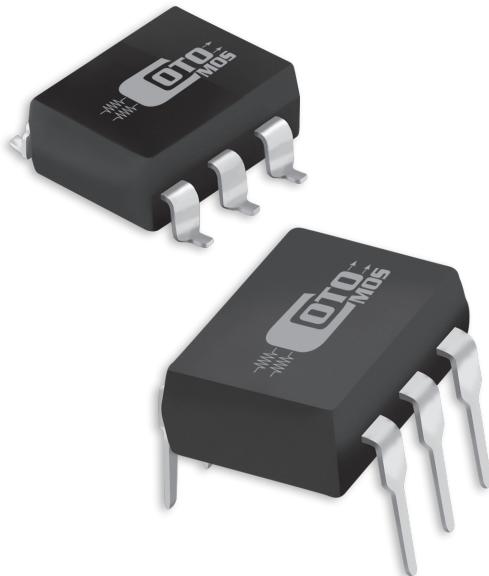

## CotoMOS® CT124/CS124

The CT124 and CS124 feature high current switching capability to 3.5A with a low on resistance of 0.07Ω Maximum. Designed for ATE, Controls, or Measurement and Instrumentation applications the CotoMOS® relay is capable of handling 40V load conditions. If your requirements are different please contact your Coto Applications Engineer for assistance through [www.cotorelay.com](http://www.cotorelay.com) or email us at [cotomas@cotorelay.com](mailto:cotomas@cotorelay.com).


## CT124/CS124 Features

- ▶ Contact Form: 1A
- ▶ Load Voltage: 40V Maximum
- ▶ Operation LED Current: 3.0mA Maximum
- ▶ Load Current: 3.5A Maximum
- ▶ On-Resistance: 0.07Ω Maximum
- ▶ Low Off-State Leakage Current: 10µA Maximum
- ▶ I/O Breakdown Voltage: 1500Vrms Minimum
- ▶ Suffix - H for I/O Breakdown Voltage: 5000Vrms Minimum


## DIMENSIONS

*in Inches (Millimeters)*


CT124

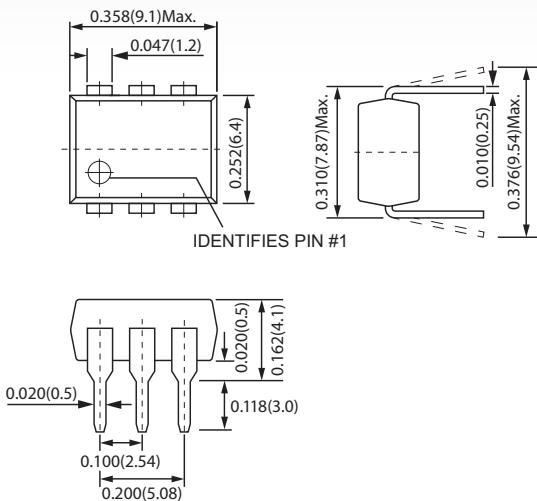

CS124

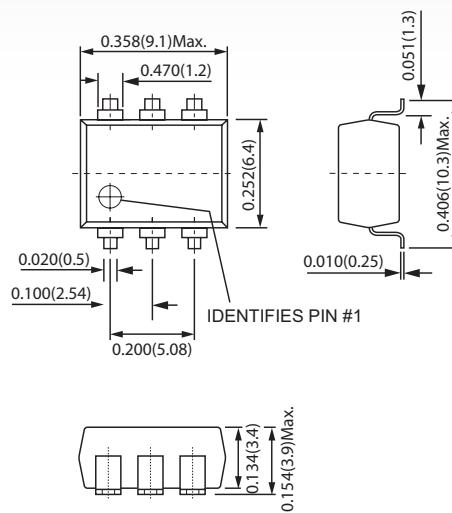

## TERMINAL IDENTIFICATION



1: Anode (LED) 2: Cathode (LED) 3: NC	4,6: Drain (MOS FET) 5: Source (MOS FET)
---	---

## CT124/CS124 MAXIMUM RATINGS (Ambient Temperature: 25°C)

Parameters	Symbol	Units	Value
<b>INPUT SPECIFICATIONS</b>			
Continuous LED Current	I <sub>F</sub>	mA	50
Peak LED Current	I <sub>FP</sub>	mA	500
LED Reverse Voltage	V <sub>R</sub>	V	5
Input Power Dissipation	P <sub>in</sub>	mW	75
<b>OUTPUT SPECIFICATIONS</b>			
Load Voltage	V <sub>L</sub>	V (AC peak or DC)	40
Load Current	I <sub>L</sub>	A	3.5
Peak Load Current	I <sub>Peak</sub>	A	8.0
Output Power Dissipation	P <sub>out</sub>	mW	500
<b>RELAY SPECIFICATIONS</b>			
Total Power Dissipation	P <sub>T</sub>	mW	550
I/O Breakdown Voltage	V <sub>I/O</sub>	V <sub>rms</sub>	1500
Operating Temperature	T <sub>opr</sub>	°C	-40 ~ +85
Storage Temperature	T <sub>Stg</sub>	°C	-40 ~ +100

## CT124/CS124 ELECTRICAL SPECIFICATIONS (Ambient Temperature: 25°C)

Parameters	Symbol	Test Conditions	Units	Min	Typ	Max
<b>INPUT</b>						
LED Forward Voltage	V <sub>F</sub>	I=10mA	V	1.0	1.37	1.5
Operation LED Current	I <sub>F On</sub>		mA		1.5	3.0
Recovery LED Voltage	V <sub>F Off</sub>		V	0.5	1.2	
<b>OUTPUT</b>						
On-Resistance Drain to Drain	R <sub>on</sub>	I <sub>F</sub> =5mA, I <sub>L</sub> =Rating Time to flow is within 1 sec.	Ω		0.045	0.07
Off-State Leakage Current	I <sub>Leak</sub>	I <sub>F</sub> =0mA, V <sub>L</sub> =40V	μA			1.0
Output Capacitance	C <sub>out</sub>	V <sub>L</sub> =0V, f=1MHz	pF		810	
<b>TRANSMISSION</b>						
Turn-On Time	T <sub>On</sub>		ms		1.8	5.0
Turn-Off Time	T <sub>off</sub>	I <sub>F</sub> =10mA, I <sub>L</sub> =Rating	ms		0.03	2.0
<b>COUPLED</b>						
I/O Insulation Resistance	R <sub>I/O</sub>		Ω	5*10 <sup>9</sup>		
I/O Capacitance	C <sub>I/O</sub>	f=1MHz	pF		1.0	

### Environmental Ratings:

Operating Temp: -40°C to +85°C; Storage Temp: -40 to +100 C.  
All electrical parameters measured at 25°C unless otherwise specified.

