
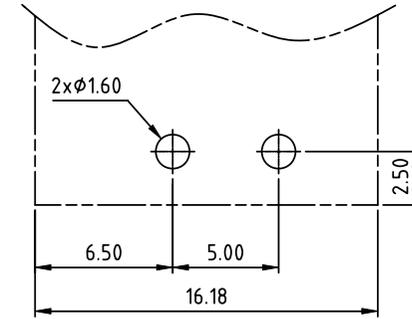
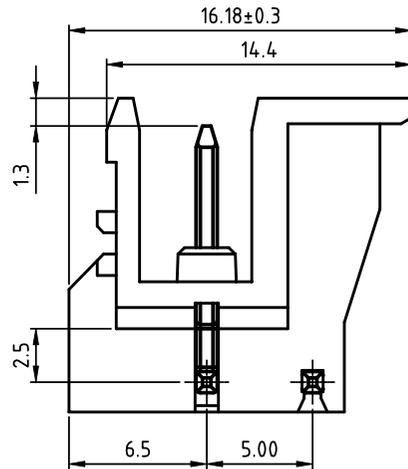
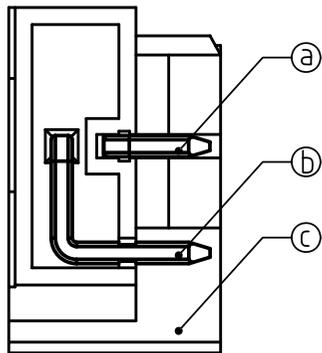
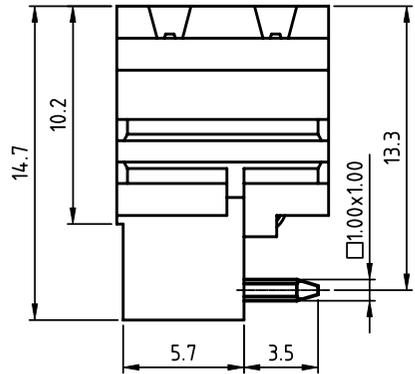


PRODUCT NUMBER	PITCH
EU0270x000J0G	5.00 mm

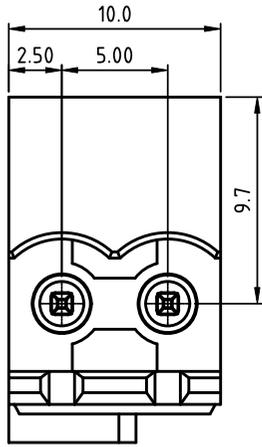

RECOMMENDED P.C.B LAYOUT
TOP VIEW

Material:

- Item (a) Pin-01: Copper, Tin plated
- Item (b) Pin-02: Copper, Tin plated
- Item (c) Terminal(housing): Thermoplastic (UL94V-0)

Electrical:

- Voltage rating: 300V
- Current rating: 20A
- Withstanding Voltage: 1.6 KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:

PART NO.: EU 02 70 x 0 00J0 G

- | | | |
|---|-------------------|-----------------|
| | Color | RoHS compliant |
| 0 | Black (RAL9005) | (lead<4%) |
| 2 | Red (RAL3001/D) | In copper Alloy |
| 3 | Orange(RAL2011/P) | |
| 4 | Yellow(RAL1018/A) | |
| 5 | Green(RAL6018/T) | |
| 6 | Blue (RAL5015/A) | |
| 8 | Grey(RAL7035/D) | |
| 9 | White(RAL1102) | |
| C | Green(RAL6018/U) | |

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection 	product family TERMINAL BLOCK
ltr	ecn no	dr	date	tolerances unless otherwise specified	title
				angles 	TERMINAL BLOCK
				MM	PLUGGABLE SOCKET, RIGHT TYPE
				scale	dwg no
				dr	sheet 1 of 1
				enr	size
				chr	EU0270x000J0G
				appd	A4
					type
					CUSTOMER Drawing
sheet index	revision	A			
	sheet	1			