

## 150mA 3-Terminal Positive Regulator


### General Description

The RT9165 is a positive low dropout regulator designed for applications requiring low dropout performance at full rated current. The device is available in fixed output voltage of 5.0V or 8.0V. The RT9165 provides excellent regulation over line, load, and temperature variations.

The other features include low dropout performance at a maximum of 1.3V at 150mA, fast transient response, internal current limiting, and thermal shutdown protection of the output devices. The RT9165 is a three-terminal regulator compatible with industrial LM78L05/L08 and available in surface mount SOT-89 package.

### Ordering Information

RT9165-□□□□

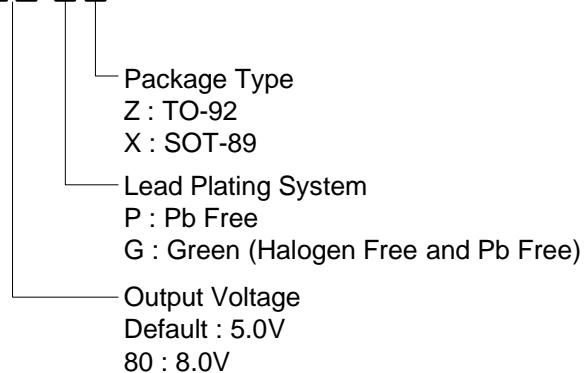

Note :

Richtek products are :

- ▶ RoHS compliant and compatible with the current requirements of IPC/JEDEC J-STD-020.
- ▶ Suitable for use in SnPb or Pb-free soldering processes.

### Marking Information

For marking information, contact our sales representative directly or through a Richtek distributor located in your area.

### Features


- Low Dropout, Maximum 1.3V at 150mA
- Fast Transient Response
- ±3% Total Output Regulation
- 0.5% Line Regulation
- 0.5% Load Regulation
- SOT-89 and TO-92 Packages
- RoHS Compliant and 100% Lead (Pb)-Free

### Applications


- 5V or 8V Output Linear Regulator
- Consumer Equipment Power Supply

### Pin Configurations

(TOP VIEW)




RT9165-xZ  
TO-92




RT9165-□□xX  
SOT-89

## Typical Application Circuit

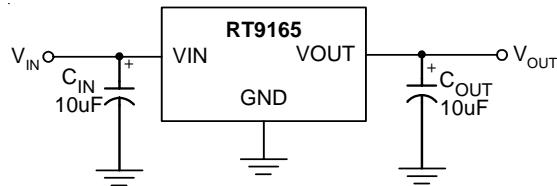

## Function Block Diagram

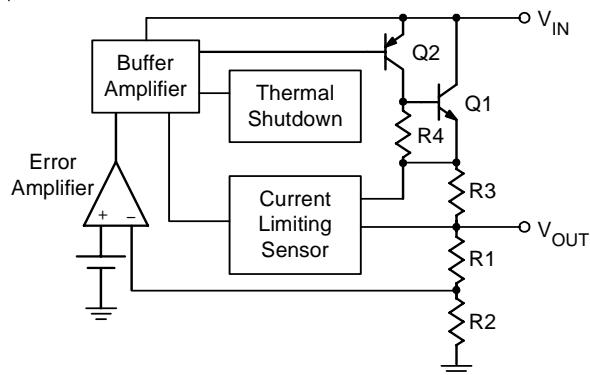

## Functional Pin Description

Pin Name	Pin Function
VOUT	Output Voltage
GND	Ground
VIN	Power Input

## Absolute Maximum Ratings

• Input Voltage -----	16V
• Power Dissipation, $P_D$ @ $T_A = 25^\circ C$	
TO-92 -----	0.625W
SOT-89 -----	0.571W
• Package Thermal Resistance (Note 1)	
TO-92, $\theta_{JA}$ -----	160°C/W
SOT-89, $\theta_{JA}$ -----	175°C/W
• Operating Junction Temperature Range -----	-40°C to 125°C
• Storage Temperature Range -----	-65°C to 150°C

## Electrical Characteristics

( $V_{IN} = 7.0V$ ,  $T_A = 25^\circ C$ , unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage (Note 2)	RT9165	$V_{OUT}$	$V_{IN} = V_{OUT} + 2V$	4.900	5.000	5.100
	RT9165-80			7.840	8.000	8.160
Line Regulation (Note 2)	$\Delta V_{LINE}$	$V_{IN} = V_{OUT} + 2V \sim 16V$	--	0.1	0.5	%
Load Regulation (Note 2)	$\Delta V_{LOAD}$	$I_L = 0\sim 150mA$	--	0.2	0.5	%
Dropout Voltage (Note 3)	$V_{DROP}$	$\Delta V_{OUT} = 1\%$	--	1.2	1.3	V
Current Limit	$I_{LIM}$		300	--	--	mA
Quiescent Current	$I_Q$		--	4.5	8	mA
Temperature Coefficient	$T_C$		--	0.005	--	%/°C
Temperature Stability	$T_S$		--	0.5	--	%
RMS Output Noise (Note 4)			--	0.003	--	%/ $V_{OUT}$







**Note 1.**  $\theta_{JA}$  is measured in the natural convection at  $T_A = 25^\circ C$  on a low effective thermal conductivity test board of JEDEC 51-3 thermal measurement standard.



**Note 2.** Low duty cycle pulse testing with Kelvin connections required.

**Note 3.** The dropout voltage is defined as  $V_{IN} - V_{OUT}$ , which is measured when  $V_{OUT}$  is  $V_{OUT(NORMAL)} - 100mV$ .


**Note 4.** Bandwidth of 10Hz to 10kHz.

## Typical Operating Characteristics

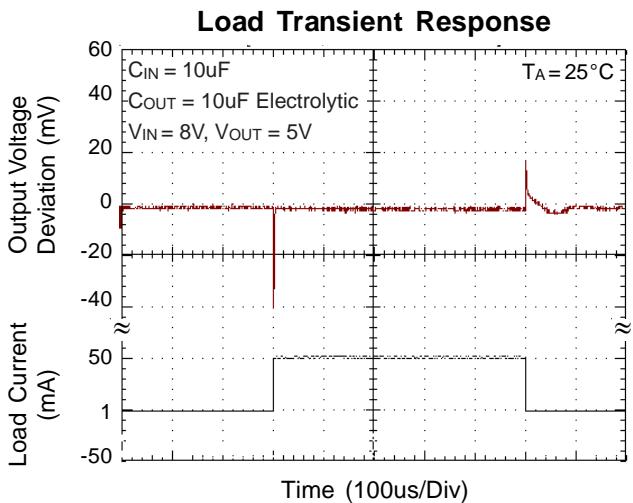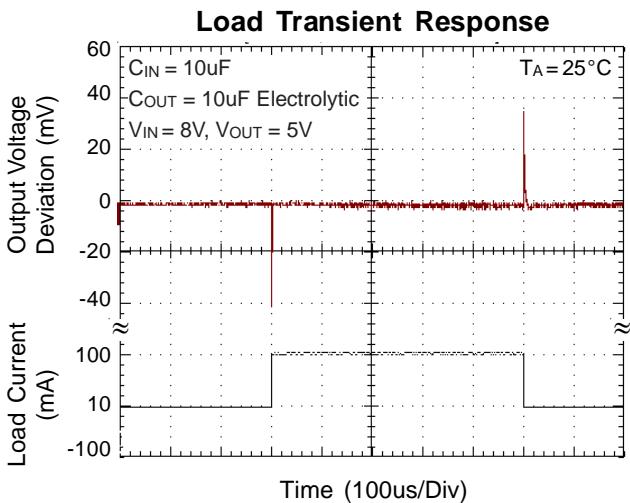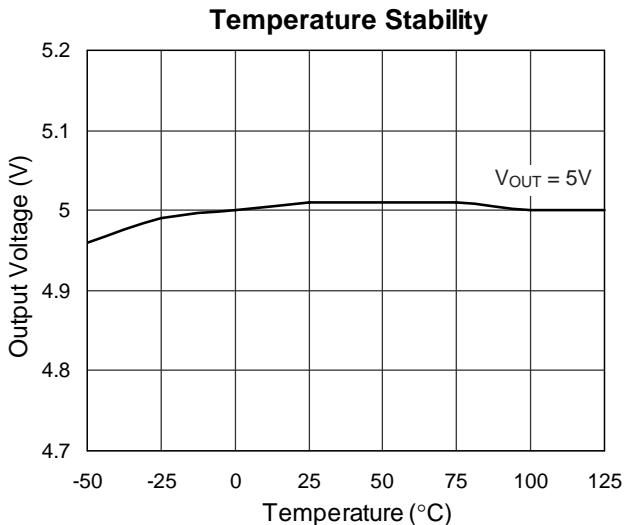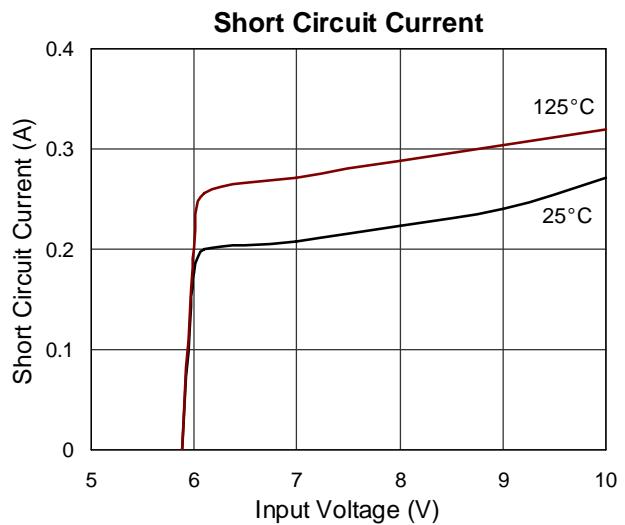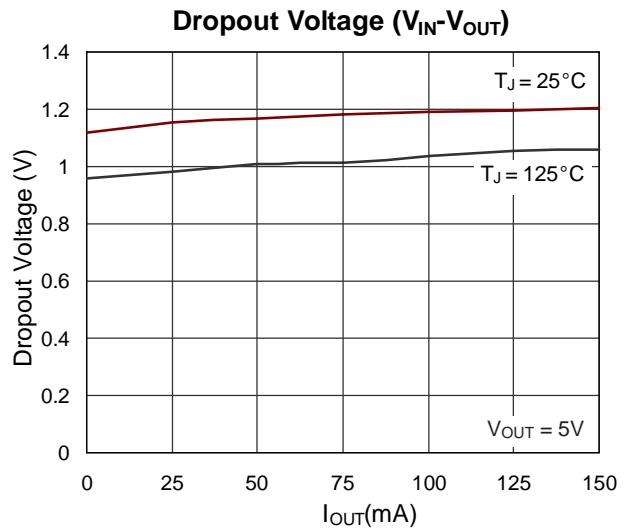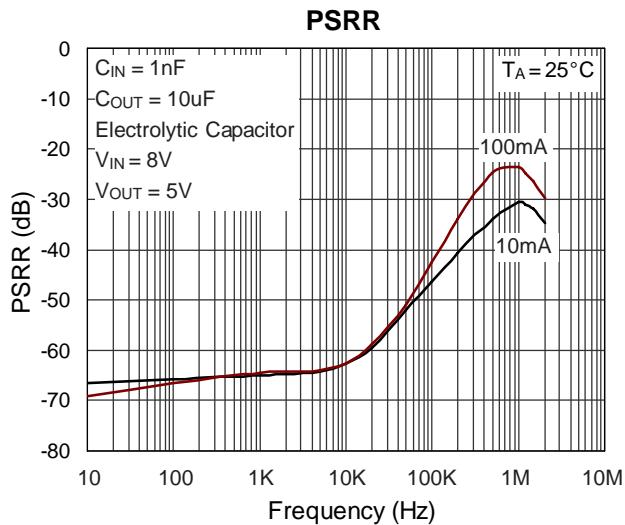

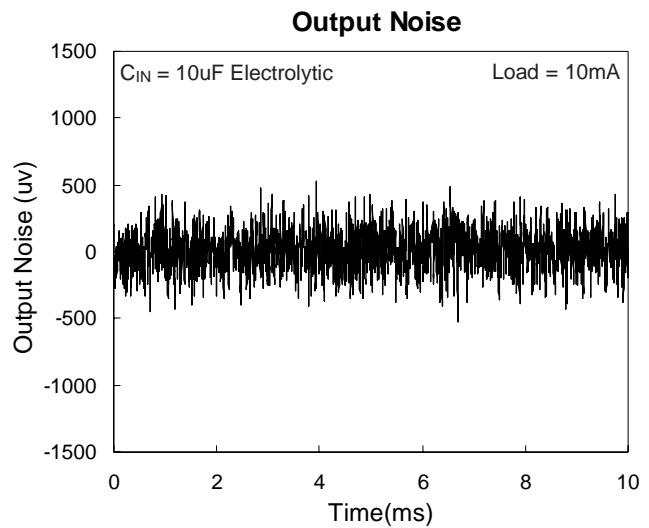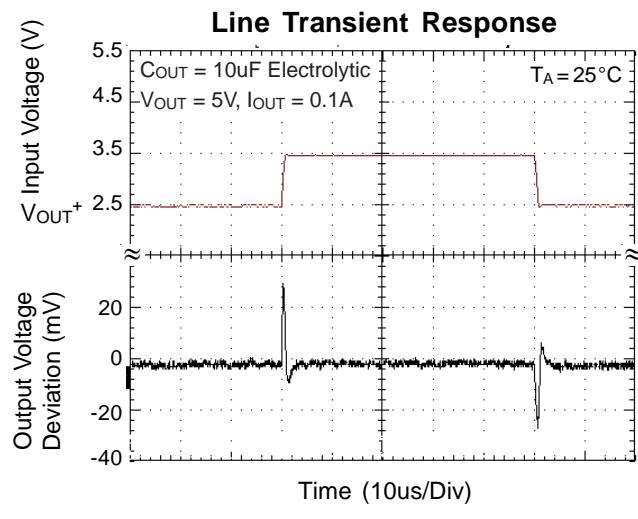


## Outline Dimension

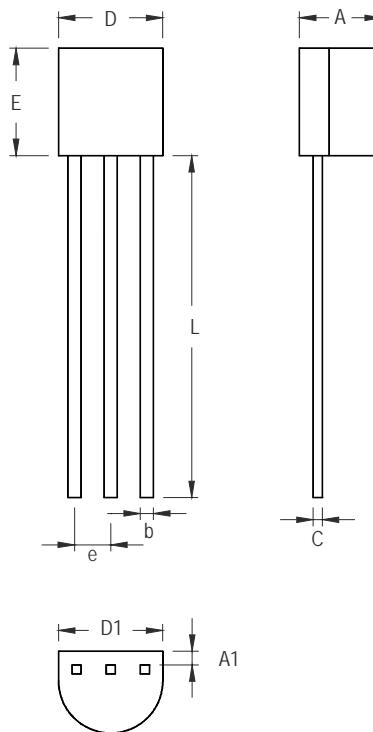

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.175	4.191	0.125	0.165
A1	1.143	1.372	0.045	0.054
b	0.406	0.533	0.016	0.021
C	0.406	0.533	0.016	0.021
D	4.445	5.207	0.175	0.205
D1	3.429	5.029	0.135	0.198
E	4.318	5.334	0.170	0.210
e	1.143	1.397	0.045	0.055
L	12.700		0.500	

3-Lead TO-92 Plastic Package

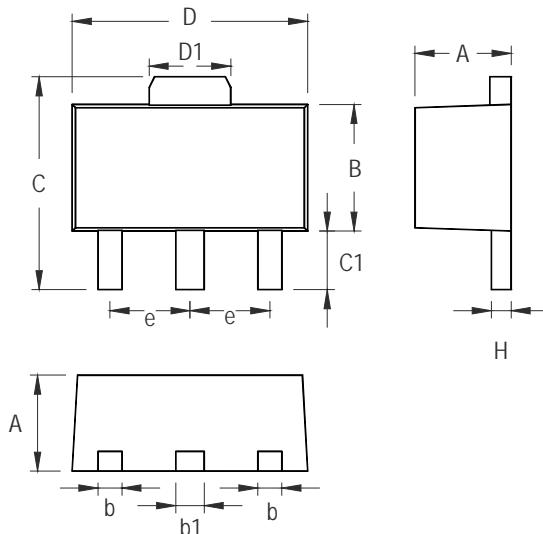

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.397	1.600	0.055	0.063
b	0.356	0.483	0.014	0.019
B	2.388	2.591	0.094	0.102
b1	0.406	0.533	0.016	0.021
C	3.937	4.242	0.155	0.167
C1	0.787	1.194	0.031	0.047
D	4.394	4.597	0.173	0.181
D1	1.397	1.753	0.055	0.069
e	1.448	1.549	0.057	0.061
H	0.356	0.432	0.014	0.017

### 3-Lead SOT-89 Surface Mount Package

#### Richtek Technology Corporation

Headquarter  
5F, No. 20, Taiyuen Street, Chupei City  
Hsinchu, Taiwan, R.O.C.  
Tel: (8863)5526789 Fax: (8863)5526611

#### Richtek Technology Corporation

Taipei Office (Marketing)  
5F, No. 95, Minchuan Road, Hsintien City  
Taipei County, Taiwan, R.O.C.  
Tel: (8862)86672399 Fax: (8862)86672377  
Email: marketing@richtek.com

Information that is provided by Richtek Technology Corporation is believed to be accurate and reliable. Richtek reserves the right to make any change in circuit design, specification or other related things if necessary without notice at any time. No third party intellectual property infringement of the applications should be guaranteed by users when integrating Richtek products into any application. No legal responsibility for any said applications is assumed by Richtek.