
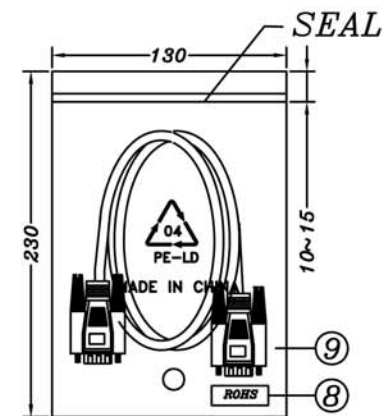


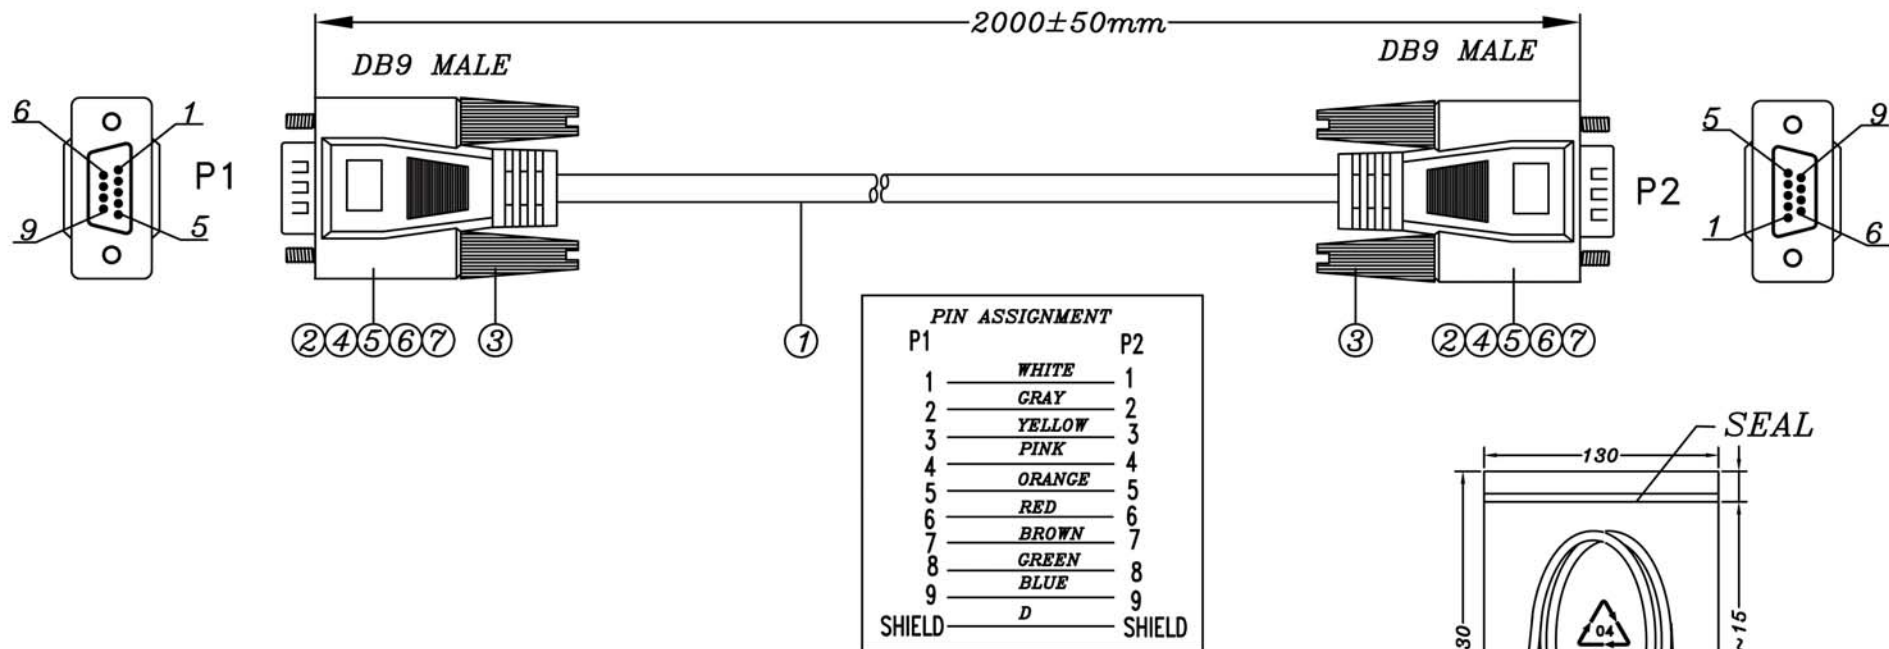

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 5Mohm(min)
 4. dielectric test: DC 300V

14		PACKING TAPE COLOR YELLOW L=2400mm			1/100
13		TRANSPARENT ADHESIVE TAPE L=2600mm			1/100
12		CARTON 5 LAYER 40*30*25CM K=K GLUE TYPE			1/100
11		WATERPROOF BAG (15+16)*29" T=0.04mm			1/100
10		PE BAG 280*330*0.05mm PRINT BLACK"MADE IN CHINA"			1/10
9		PE BAG 130*230*0.05mm PRINT BLACK"MADE IN CHINA"		1	PCS
8		ROHS LABEL 35*22mm WHITE/BOTTOM TEXT/BLACK			112/100
7		OUTER MODEL PVC 45P COLOR BEIGE(CS-B02)		35.3	g
6		INNER MODEL PVC 65P COLOR BLACK		8.4	g
5		ROUND TIN OD1.0mm		0.54	g
4		HEAT SHINK TUBE OD1.5mm		2	15mm
3		THUMB SCERW #4-40UNC E32 BEIGE(CS-B02)		4	PCS
2		DB9/M SOLDER TYPE PLASTIC BLUE		2	P1,P2
1		NOUL 28AWG(7/0.10)*9C+D+AL OD5.0mm COLOR BEIGE(CS-B02)	01	1	2000mm
NO.	PART NO.	DESCRIPTION	VENDER	QTY	UNIT/REF

RoHS
Compliant

ITEM NO

AK129-2-R

TITLE

Connection Cable for 9-Pin Interface
Serial, Molded Hoods

ASSMANN
Electronics, Inc

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
 © Copyright 2008 by Assmann Electronic Components
 All International Rights Reserved