
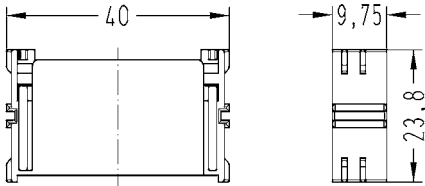






Number of contacts

# 5

500 V  
20 A

Identification	Wire cross section (mm <sup>2</sup> )	Part number	Drawing Dimensions in mm																											
Han-Yellock®, Crimp terminal, silver plated contacts, contact resistance ≤2 mOhm  		11 05 105 3001 11 05 105 3011 11 05 105 3012	   11 05 105 3001 grey 11 05 105 3011 blue 11 05 105 3012 red																											
Han-Yellock®, Crimp contact, gold plated contacts, contact resistance ≤2 mOhm  	0.14–0.37 0.5 0.75 1 1.5 2.5 3 4	11 05 000 6121 11 05 000 6122 11 05 000 6123 11 05 000 6124 11 05 000 6125 11 05 000 6126 11 05 000 6127 11 05 000 6128																												
Han-Yellock®, Crimp contact, silver plated contacts, contact resistance ≤2 mOhm  	0.14–0.37 0.5 0.75 1 1.5 2.5 3 4	11 05 000 6101 11 05 000 6102 11 05 000 6103 11 05 000 6104 11 05 000 6105 11 05 000 6106 11 05 000 6107 11 05 000 6108	<table border="1"> <thead> <tr> <th colspan="2">Wire gauge</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm<sup>2</sup></td> <td>AWG 26-22</td> <td>6.5 mm</td> </tr> <tr> <td>0.5 mm<sup>2</sup></td> <td>AWG 20</td> <td>6.5 mm</td> </tr> <tr> <td>0.75 mm<sup>2</sup></td> <td>AWG 18</td> <td>6.5 mm</td> </tr> <tr> <td>1 mm<sup>2</sup></td> <td>AWG 18</td> <td>6.5 mm</td> </tr> <tr> <td>1.5 mm<sup>2</sup></td> <td>AWG 16</td> <td>6.5 mm</td> </tr> <tr> <td>2.5 mm<sup>2</sup></td> <td>AWG 14</td> <td>6.5 mm</td> </tr> <tr> <td>3 mm<sup>2</sup></td> <td>AWG 12</td> <td>6.5 mm</td> </tr> <tr> <td>4 mm<sup>2</sup></td> <td>AWG 12</td> <td>6.5 mm</td> </tr> </tbody> </table> <p>Removal tool 09 99 000 0319 see chapter 90</p>	Wire gauge		Stripping length	0.14-0.37 mm <sup>2</sup>	AWG 26-22	6.5 mm	0.5 mm <sup>2</sup>	AWG 20	6.5 mm	0.75 mm <sup>2</sup>	AWG 18	6.5 mm	1 mm <sup>2</sup>	AWG 18	6.5 mm	1.5 mm <sup>2</sup>	AWG 16	6.5 mm	2.5 mm <sup>2</sup>	AWG 14	6.5 mm	3 mm <sup>2</sup>	AWG 12	6.5 mm	4 mm <sup>2</sup>	AWG 12	6.5 mm
Wire gauge		Stripping length																												
0.14-0.37 mm <sup>2</sup>	AWG 26-22	6.5 mm																												
0.5 mm <sup>2</sup>	AWG 20	6.5 mm																												
0.75 mm <sup>2</sup>	AWG 18	6.5 mm																												
1 mm <sup>2</sup>	AWG 18	6.5 mm																												
1.5 mm <sup>2</sup>	AWG 16	6.5 mm																												
2.5 mm <sup>2</sup>	AWG 14	6.5 mm																												
3 mm <sup>2</sup>	AWG 12	6.5 mm																												
4 mm <sup>2</sup>	AWG 12	6.5 mm																												

Han-Yellock