

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://download.phoenixcontact.com)



Lower part of housing closed, fully assembled, with metal foot catch.

Product Features

- ▼ Tool-free mounting
- ✓ Large assembly area
- ✓ Recessed labeling areas
- ✓ Inflammability class V0 according to UL 94
- Fast mounting on DIN rails according to EN 60715
- Material and part identification embossed on the housing (recyclability)
- Cost savings thanks to easy device production
- Metal foot catch
- ☑ Electronic components can be partially removed.
- Functional earth ground contact (EMC) integrated in the housing base
- optional BUS connection integrated in the housing, for either parallel or serial contacting



Key commercial data

Packing unit	11
Minimum order quantity	10 1
Weight per Piece (excluding packing)	66.11 GRM
Custom tariff number	85472000
Country of origin	Germany

Technical data

General

Housing type	Component housing



Technical data

General

Housing material	Polyamide
Color	green

Ambient conditions

Ambient temperature (operation)	-40 °C 105 °C
---------------------------------	---------------

Dimensions

Length	99 mm
Constructional height	114.5 mm
Width	45 mm

Technical data

Inflammability class according to UL 94	V0
Power dissipation at 20°C in the horizontal mounting position	7.6 W 14.1 W
Number of positions	32
	8

Classifications

eCl@ss

eCl@ss 4.0	27180401
eCl@ss 4.1	27180401
eCl@ss 5.0	27180506
eCl@ss 5.1	27180506
eCl@ss 6.0	27180802
eCl@ss 7.0	27182702
eCl@ss 8.0	27182702

ETIM

ETIM 2.0	EC001031
ETIM 3.0	EC001031
ETIM 4.0	EC001031
ETIM 5.0	EC001031

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501



Classifications

UNSPSC

UNSPSC 13.2	31261501
Approvals	
Approvals	
Approvals	
UL Recognized	
Ex Approvals	
Approvals submitted	
Approval details	
UL Recognized \$\)	

Accessories

Accessories

Coding element

Coding star - CR-MSTB - 1734401



Coding section, inserted into the recess in the header or the inverted plug, red insulating material

Coding profile - CP-MSTB - 1734634



Coding profile, is inserted into the slot on the plug or inverted header, red insulating material



Accessories

Component housing center part

Electronic housing - ME 45 UTM GN - 2853404



Intermediate element for modular extension of the volume of the housing in the pitch. The open intermediate element is 22.5 mm wide.

Electronic housing - ME 45 UTM G GN - 2853417



Intermediate element for modular extension of the volume of the housing in the pitch. The closed intermediate element is 22.5 mm wide.

Electronic housing - ME 45 UTM G GN - 2853417



Intermediate element for modular extension of the volume of the housing in the pitch. The closed intermediate element is 22.5 mm wide.

Filler plug

Electronic housing - ME B-22,5 MKDSO GN - 2907143



Filler plugs, for unoccupied terminal points



Accessories

Electronic housing - ME B-22,5 MSTBO GN - 2907156



Filler plugs, for unoccupied terminal points

Ground contact

Electronic housing - ME FE-CONTACT - 2908294



Functional earth ground contact, for intermediate elements.

Electronic housing - ME FE-CONTACT - 2908294



Functional earth ground contact, for intermediate elements.

Mounting material

Components of electronic housing - ME-SAS - 2853899



Shield connection clamp for printed circuit terminal block

Electronic housing - ME LPZS - 2906911



PCB stop, for soldering onto PCB



Accessories

Electronic housing - ME MF 17,5 - 2908281






Electronic housing - ME LPZS - 2906911



PCB stop, for soldering onto PCB


Electronic housing - ME MF 17,5 - 2908281





PCB

Electronic housing - ME LP - 2906908





Required add-on products



Accessories

Electronic housing - ME 45 OT-1MSTBO GN - 2709192



Upper part of housing, for COMBICON connection, single-level

Electronic housing - ME 45 OT-MSTBO GN - 2909743



Upper part of housing, double-level, for COMBICON connection, housing width: 45 mm

Electronic housing - ME 45 OT-MKDSO GN - 2909390



Housing upper part, for printed circuit terminal block connection

Electronic housing - ME 45 OT-MKDSO SET - 2909345



Housing upper part, complete with PCB termination blocks for full equipping. 32-pos., housing width: 45 mm

Upper part of housing - ME 45 OT-MSTBO SET - 2909905


Housing upper part, complete with COMBICON headers and screw plugs for full equipping. 32-pos., housing width: 45 mm



Drawings




Dimensioned drawing




Dimensions of the electronic housing ME... with double-level upper part

Dimensioned drawing




Dimensions of the electronic housing ME... with single-level upper part

Dimensioned drawing




Dimensions of the electronic housing ME... with double-level upper part

Dimensioned drawing




Dimensional drawing of the ME... printed circuit board if the triple-level upper part is used

Dimensioned drawing



Inner housing dimensions, electronic housing ME 45 ...


Schematic diagram




Pin assignment left




Schematic diagram





Pin assignment right


Dimensioned drawing

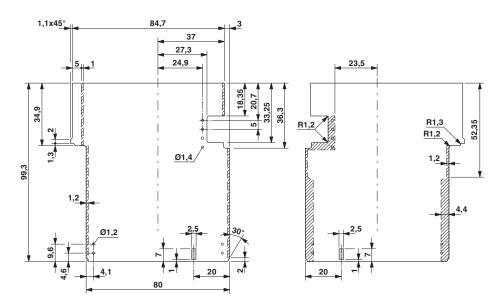

Dimensional drawing of the ME... printed circuit board if the single level upper part is used




Dimensioned drawing

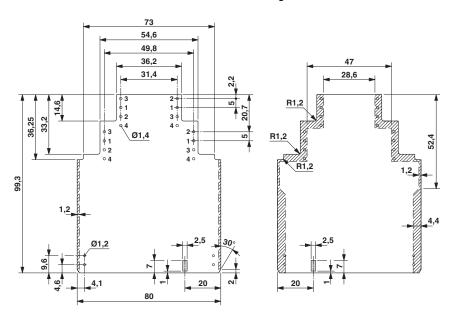

Dimensional drawing of the ME... printed circuit board if the double level upper part is used

Dimensioned drawing

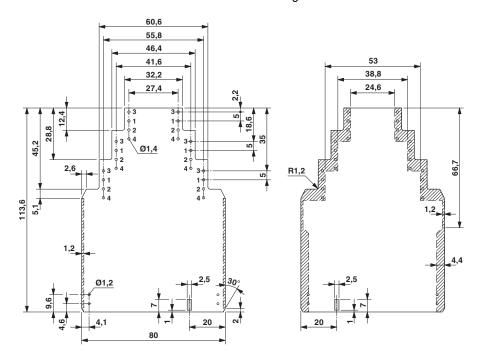

Dimensional drawing of the ME... printed circuit board if the triple-level upper part is used



© Phoenix Contact 2013 - all rights reserved http://www.phoenixcontact.com