
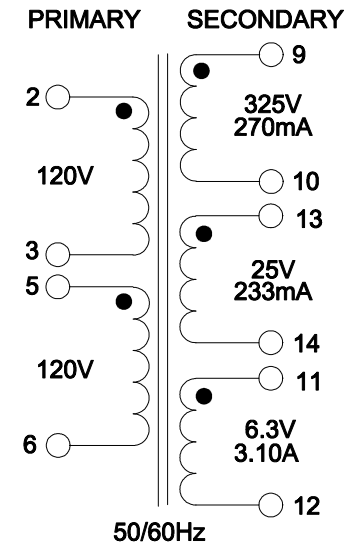


DIMENSIONS:	
A	3.375" ±0.063
B	2.813" ±0.063
C	2.385" ±0.063
D	1.820" ±0.030
E	0.400" ±0.030
G	0.219" ±0.010

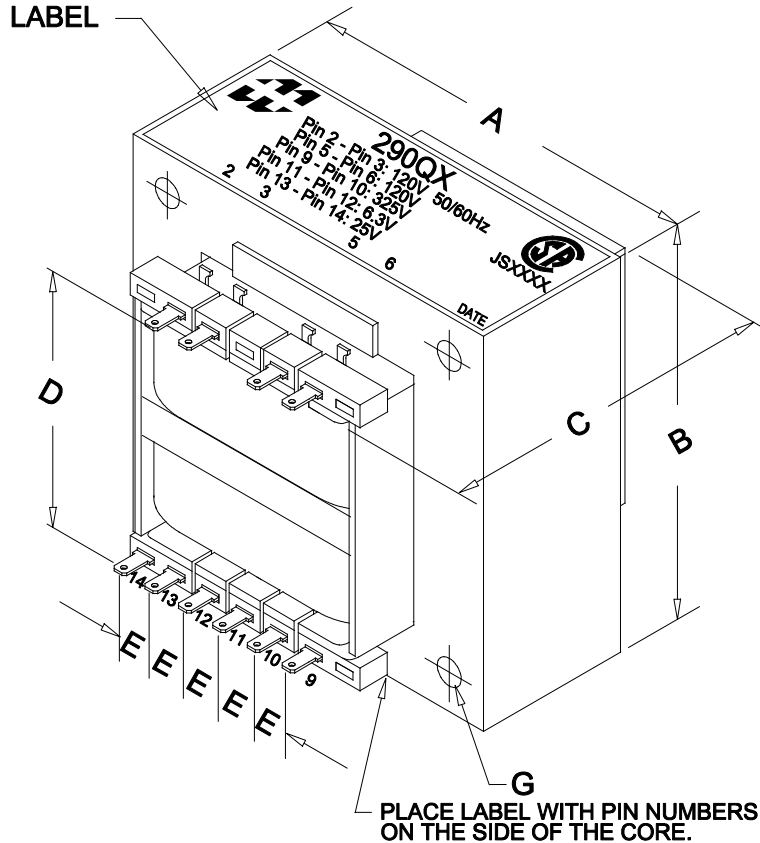

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 120V, 60Hz, Pin 2 - Pin 3	198mA Max.
Sec. N.L.V	@ 120V, 60Hz, Pin 2 - Pin 3	
	Pin 5 - Pin 6 =	120.0V ±2%
	Pin 9 - Pin 10 =	366.8V ±2%
	Pin 11 - Pin 12 =	7.606V ±2%
	Pin 13 - Pin 14 =	28.45V ±2%
DCR	@ 20°C, Pin 2 - Pin 3 =	8.054 Ω ±20%
	@ 20°C, Pin 5 - Pin 6 =	9.752 Ω ±20%
	@ 20°C, Pin 9 - Pin 10 =	52.25 Ω ±20%
	@ 20°C, Pin 11 - Pin 12 =	0.166 Ω ±20%
	@ 20°C, Pin 13 - Pin 14 =	4.776 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION		PH # (519) 886-6181 FAX # (519) 886-9540
0	Released	03/10/11	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		
1	Corrected sec. current ratings	26/03/12			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: 290QX
			DATE: 03/10/11	APP'D. BY:	TRANSFORMER
				DIMENSIONS: IN(X) MM()	DWG. NO. 290QX