

NOTES:


1. MATERIALS AND FINISHES:
 BODY, BARREL, SHELL, WASHER, & FERRULE - BRASS, NICKEL PLATING
 CONTACT - BRASS, GOLD PLATING
 OUTER CONTACT - BeCu, NICKEL PLATING
 SPRING - STAINLESS STEEL, NICKEL PLATING
 INSULATOR - PTFE, NATURAL
 GASKET - SILICONE RUBBER, RED
2. ELECTRICAL:
 A. IMPEDANCE: 75 OHM
 B. FREQUENCY RANGE: DC - 12 GHz
 C. RETURN LOSS: 23 dB MIN @ DC - 6 GHz
 19 dB MIN @ 6 - 12 GHz
3. MECHANICAL:
 A. DURABILITY: 500 CYCLES MIN.
 B. TEMPERATURE RANGE: -65°C TO +165°C

4. PACKAGING:
 A. QUANTITY: SINGLE PACK
 B. MARKING: BAG TO BE MARKED "AMPHENOL RF, 31-70534, AND DATE CODE"
 5. CABLE ASSEMBLY INSTRUCTIONS:
 A. TRIM CABLE AS SHOWN.
 B. SLIDE FERRULE ONTO CABLE.
 C. CRIMP CONTACT TO CABLE CENTER CONDUCTOR WITH 0.068" HEX DIE
 D. CRIMP FERRULE WITH 0.324" HEX DIE.
- 6 SHOWS CABLE ENTRY DIMENSIONS.


THIRD ANGLE PROJ.

REVISIONS




REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	18-Nov-16	2446	VK

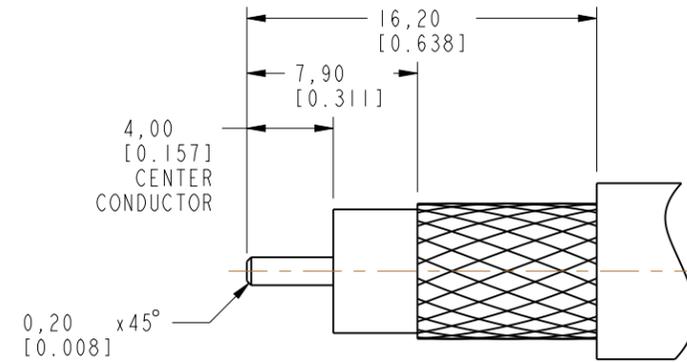

RECOMMENDED CABLE STRIPPING DIMENSIONS

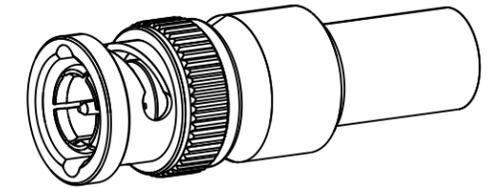

SCALE 1.500

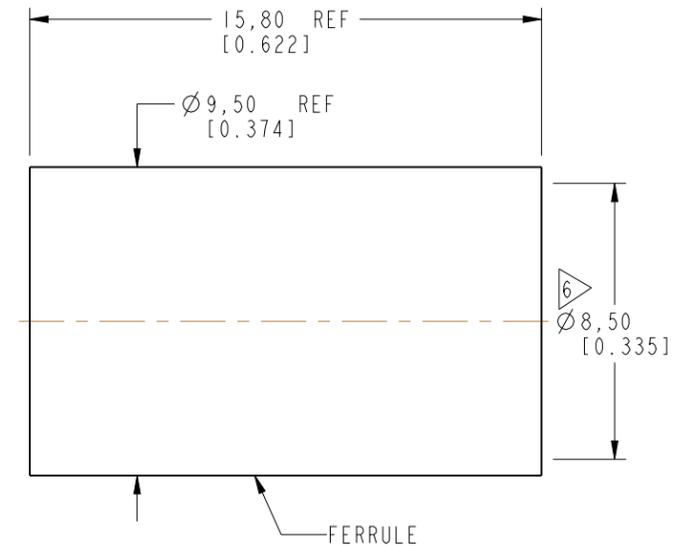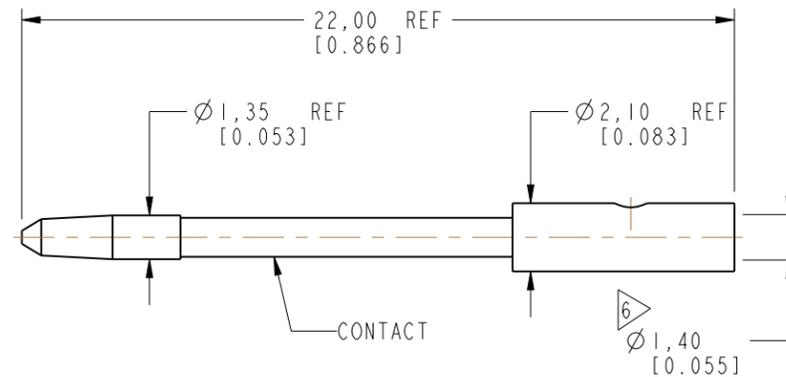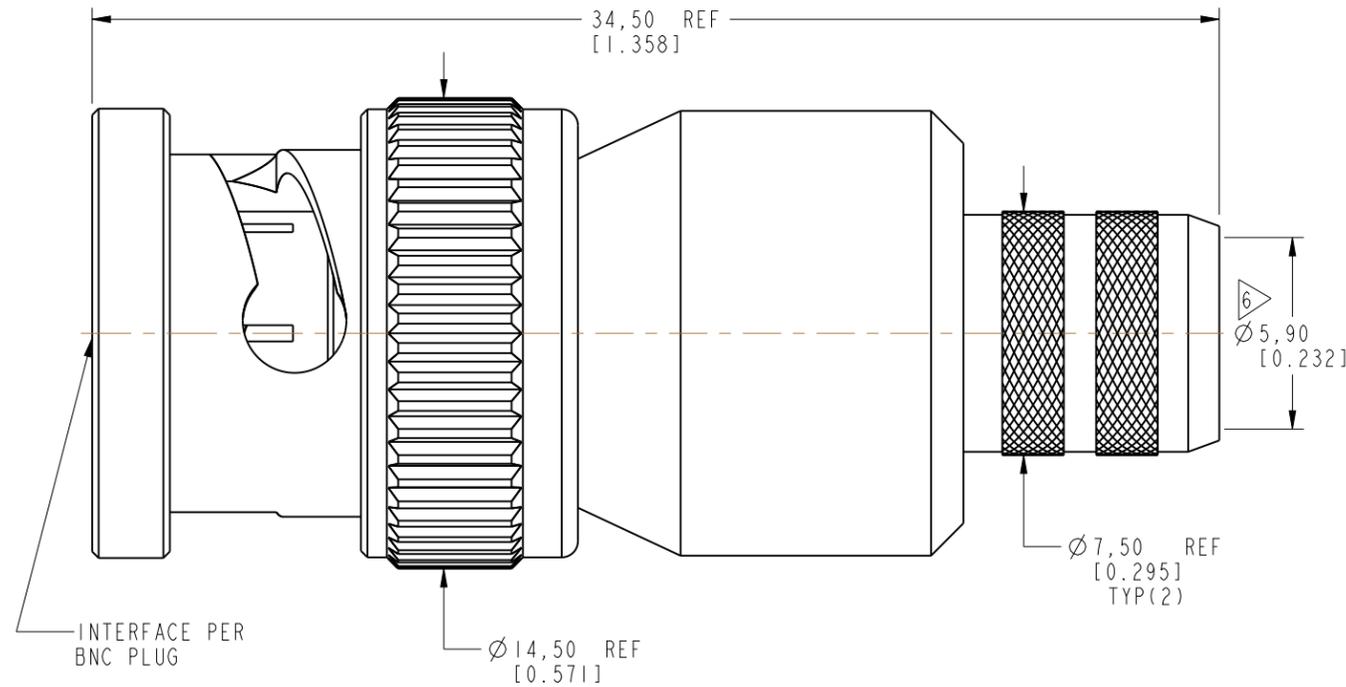

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
 <0.5mm ±0.05mm 0.5 - 6mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ±0.3mm ANGLES ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL SEE NOTES	DRAWN RAJAGOPAL N	DATE 27-Oct-16	TITLE BNC STR CRIMP PLUG FOR BELDEN 4794R CABLE		Amphenol RF www.amphenolrf.com
REFERENCE EAR #	ENGINEER RAJAGOPAL N	DATE 27-Oct-16	DRAWING NO. 31-70534		
CONFIGURATION LEVEL: In Work	APPROVED K.CAPOZZI	DATE 18-Nov-16	SCALE: 4.5:1.0	SHEET 2 OF 2	ITEM NO. 31-70534
FINISH	CAD FILE	DWG SIZE B	REV A	PART NO. 31-70534	