

1


2

3

4

Configuration: Twisted Pair and One by One
HPDB50M HPDB50M

A

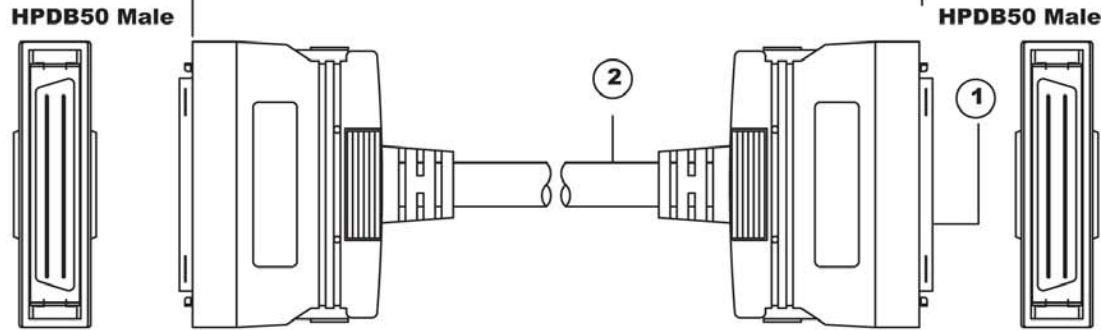

Material:

- 1.Cable:#28,UL2919,25P+1+AL/MY+B,O.D:9.5
Insulation of Conductor with P.P(ε0.75)
- 2.Connector:HPDB50M, I.D.C.
- 3.Copper Tape Size:(10X105)+(25X85)

Note:

- 1.Total Length:2000±50mm
- 2.Color: Beige
- 3.Molded Type
- 4.360° Solder

B


C

Description

Name :

AK579_F-2

HPDB50 Male-HPDB50 Male

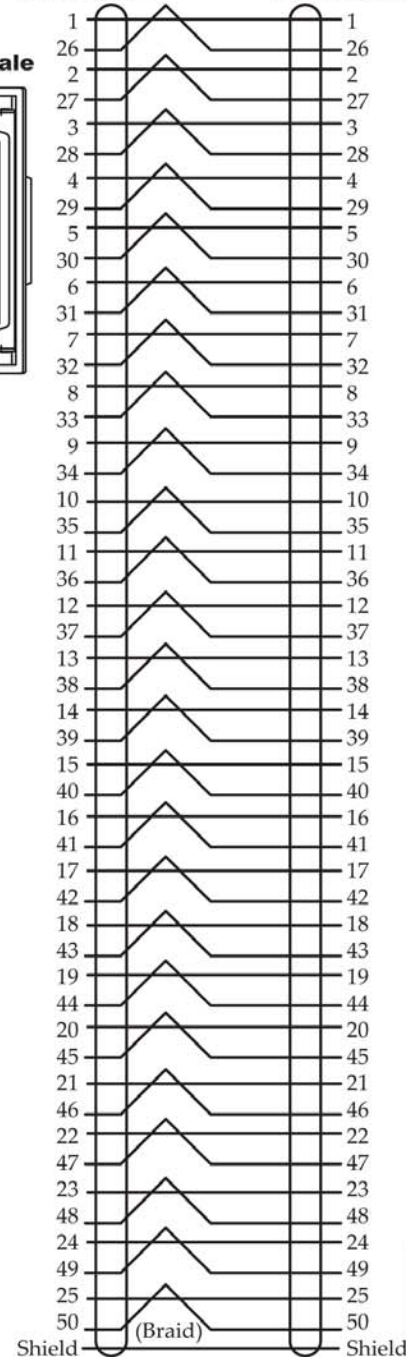

A

B

C

D

THIS DRAWING IS UNPUBLISHED

© Copyright 2005 by Assmann Electronic Components All International Rights Reserved

This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.

1

2

3

4