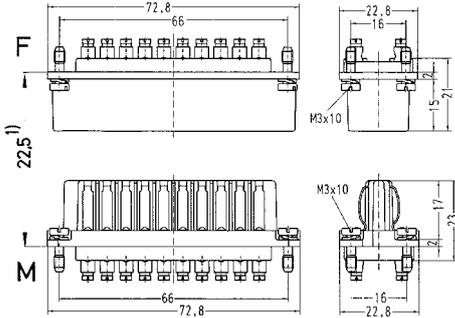

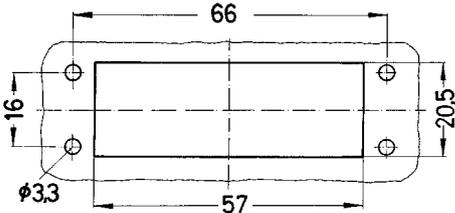


Number of contacts

20

~ 25 V  
 - 60 V  
 10 A

Identification	Wire cross section (mm <sup>2</sup> )	Part number	Drawing Dimensions in mm
Staf®, Screw terminal, Male insert (F), silver plated contacts, contact resistance ≤2 mOhm 	1.5	09 70 020 2622	 <p>1) Distance for contact max. 24 mm</p>
Staf®, Screw terminal, Female Insert (M), silver plated contacts, contact resistance ≤2 mOhm 	1.5	09 70 020 2817	 <p>Contact arrangement (view from termination side)</p>
Staf®, Solder terminal, Male insert (F), silver plated contacts, contact resistance ≤2 mOhm 	2.5	09 70 020 2621	 <p>Panel cut out for inserts for use without hoods/housings</p>
Staf®, Solder terminal, Female Insert (M), silver plated contacts, contact resistance ≤2 mOhm 	2.5	09 70 020 2816	

Staf