


Dimensions (in millimetres)

Part No.	H		Ĵ		Р	R	S	Т	HW	JW
	min a	max b	min a	max b	<u>+</u> 10% b	<u>+</u> 10% b	+10% b	<u>+2</u> 0% b	+20% b	<u>+</u> 20% b
222W163	28	13,6	15	5,8	53	38	3,0	1,0	2,8	1,5





Ordering Information

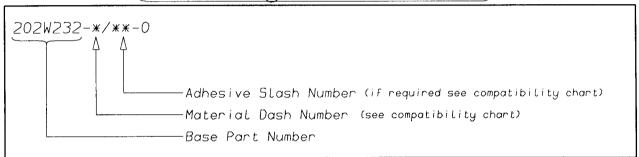

(COMPATIBILITY CHART)

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42 ,/86
-4	POLYOLEFIN, FLEXIBLE	/42 ,/86
-25	ELASTOMER, FLUID RESISTANT	/86,/225
		· · · · · · · · · · · · · · · · · · ·

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS, WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

POTTING PORTS ARE OPTIONAL WHEN SPECIFIED BY SUFFIX "-00" THEY WILL BE LOCATED AS SHOWN

Raychem Electronics OEM Division Europe Swindon, Wiltshire, England. Telephone: (01793) 528171 Fax: 573923