



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14	A1	REVISED PER ECO-10-026026	23DEC10	HMR DR

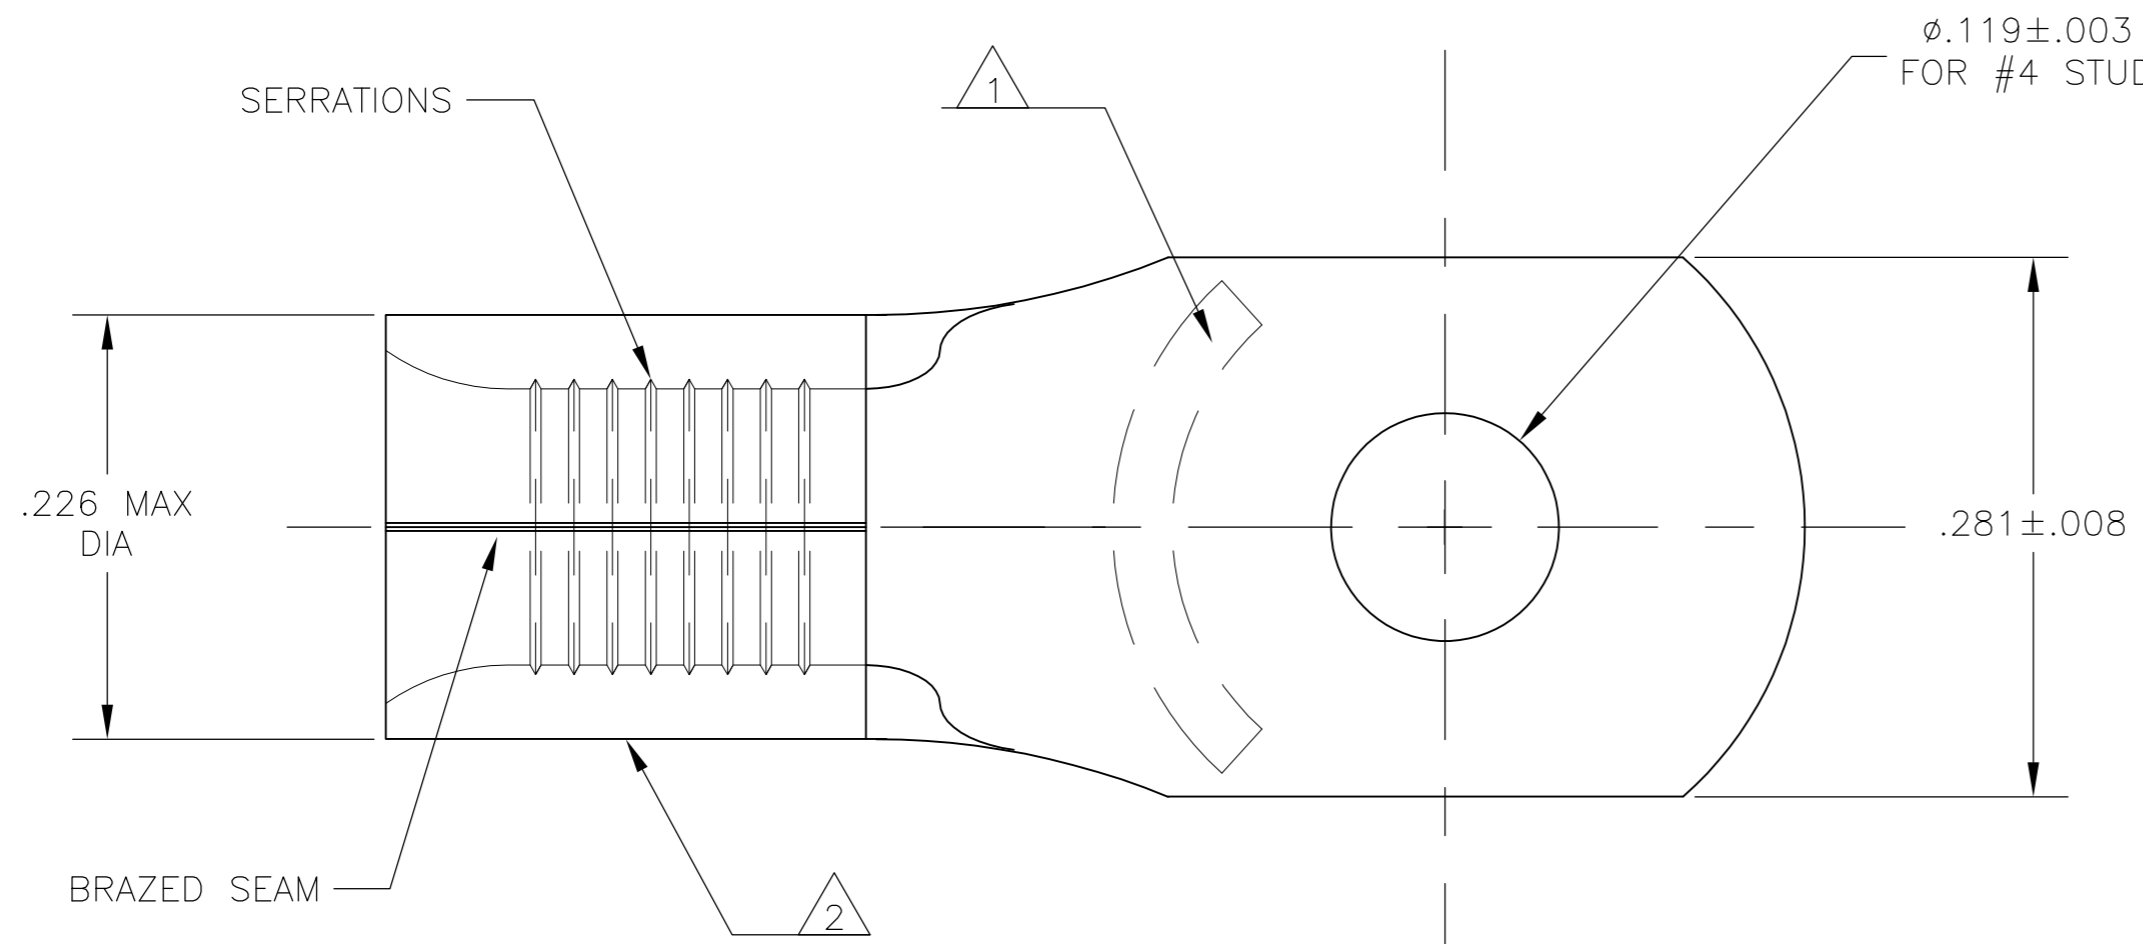

AMP WIRE RANGE	UL Listed FILE E13288	SIB LR7189 Certified
12-10 AWG SOLID OR STRANDED	NOT APPLICABLE	NOT APPLICABLE

- 1 STAMP AMP 12-10 APPROX AS SHOWN
- 2 WIRE BARREL COLOR CODED ORANGE TO DENOTE NICKEL MATERIAL.
- 3 MATERIAL: NICKEL PER ASTM B-162, ANNEALED.
- 4 MAX RECOMMENDED OPERATING TEMP, 649°C MAX
- 5 WIRE CROSS SECTIONAL AREA RANGE:
2.62-6.64mm² [5,180-13,100] CIR MILS
SOLID OR STRANDED
- 6 NOTE DELETED.

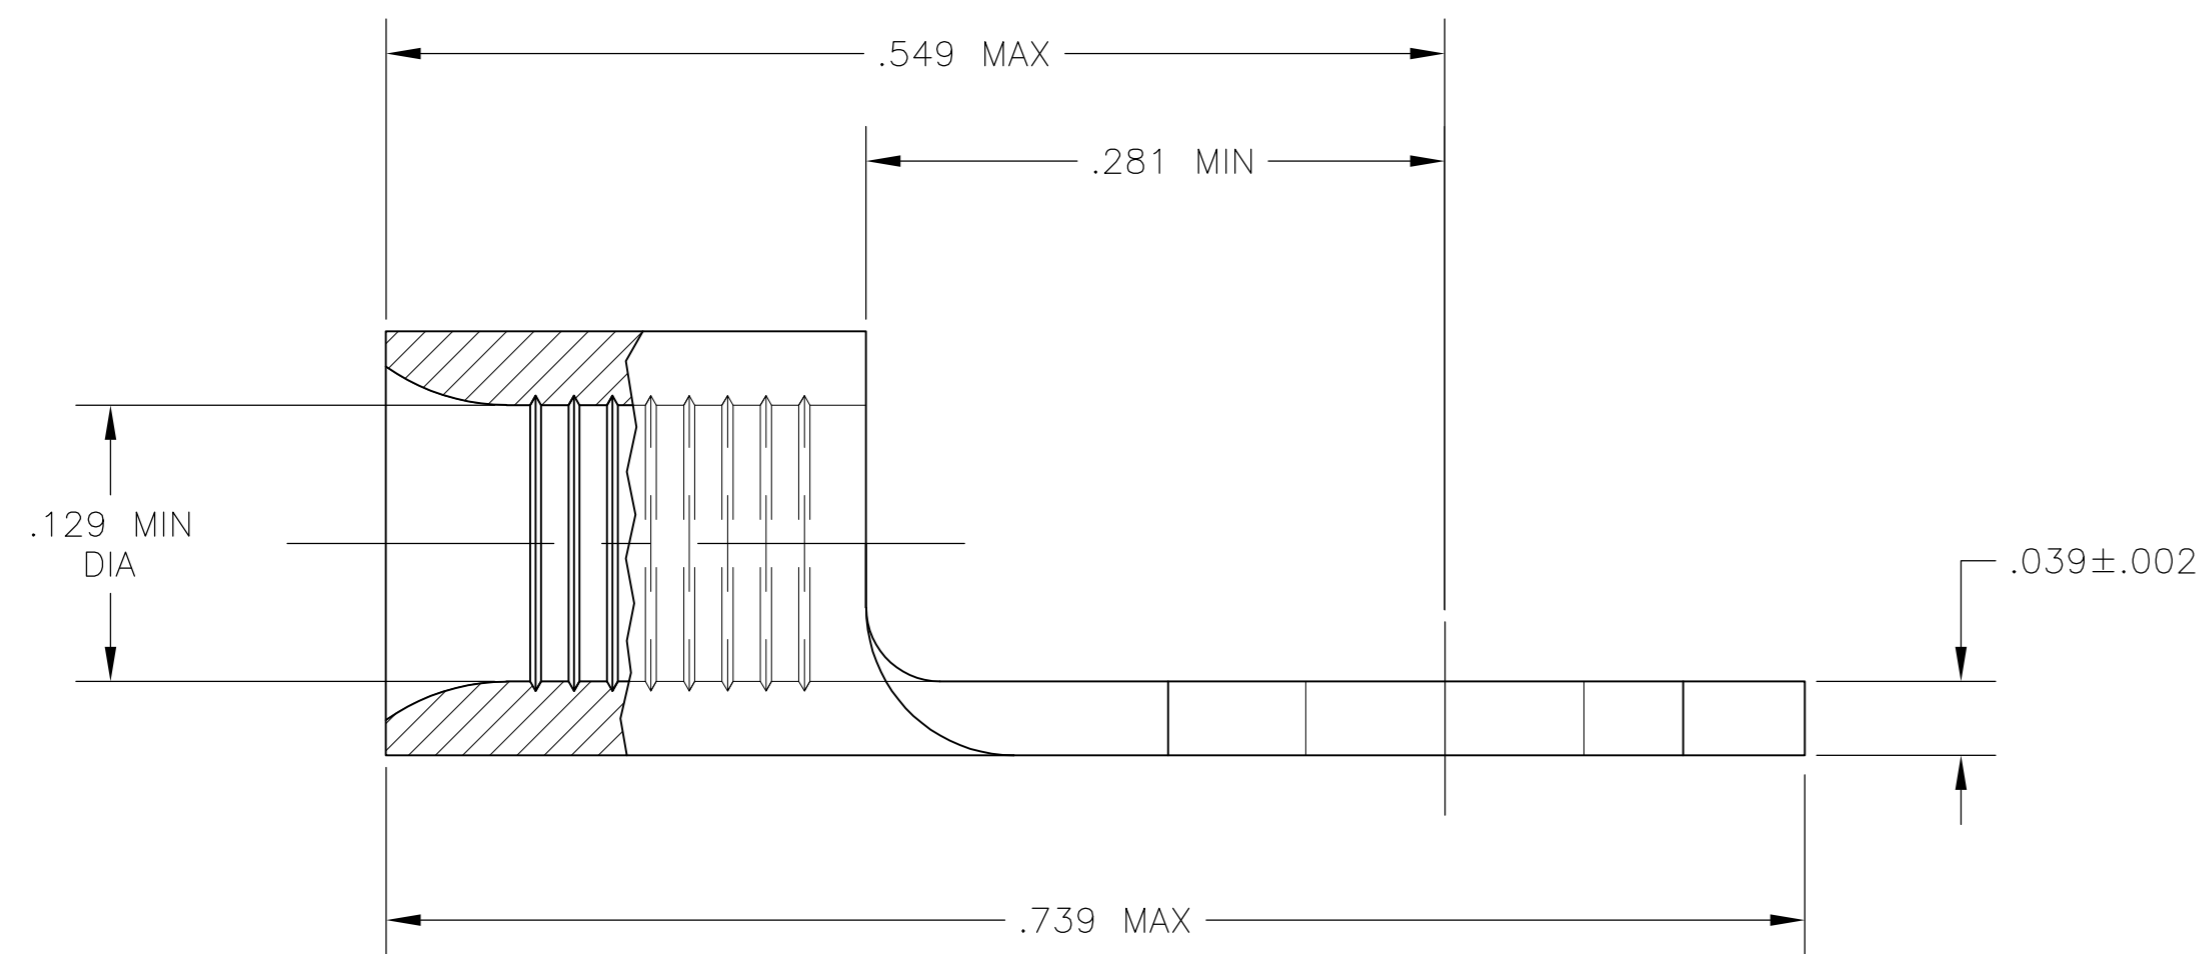

696810-1
PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 24AUG05	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK MJ SPICER 24AUG05		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD MJ SPICER 24AUG05	NAME TERMINAL, RING TONGUE, HIGH TEMPERATURE, STRATO-THERM	
0 PLC ± -		PRODUCT SPEC	SIZE A2	CAGE CODE 00779
1 PLC ± -		APPLICATION SPEC	DRAWING NO C=696810	RESTRICTED TO
2 PLC ± -		WEIGHT	SCALE 10:1	SHEET 1 of 1
3 PLC ± -		MATERIAL	REV A1	
4 PLC ± -		FINISH		
ANGLES ± -		CUSTOMER DRAWING		

696810