

1 2 3 4 5 6 7

A

B

C

D

E

F

G

H

A

B

C




D

E

F

G

H

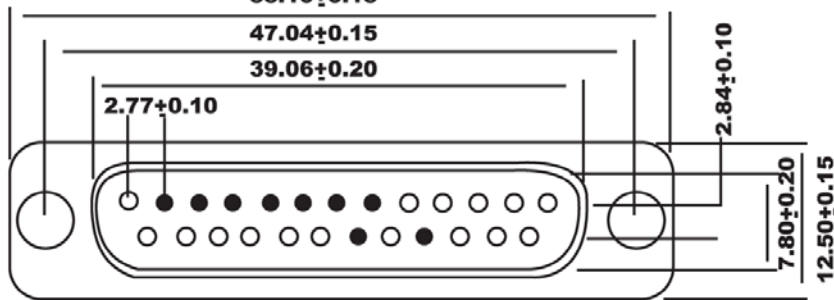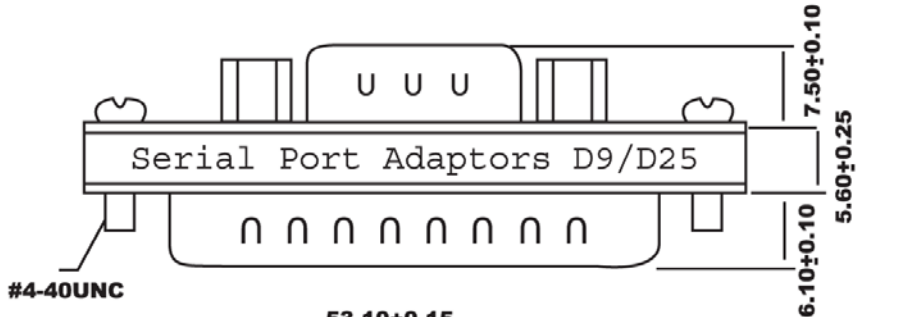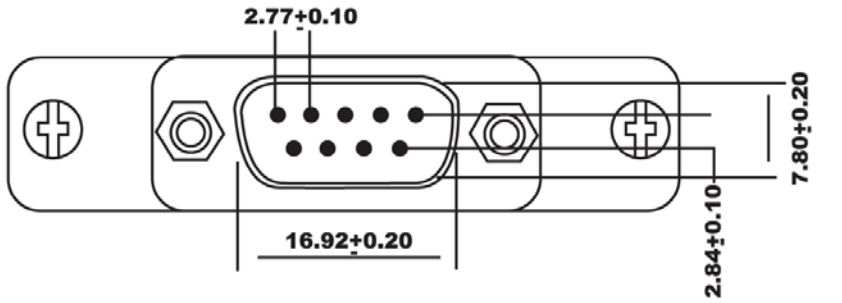

MA 001C (DB9M/25M Adaptor)

PIN OUT: 09Male 25Male

- 1 ——— 8
- 2 ——— 3
- 3 ——— 2
- 4 ——— 20
- 5 ——— 7
- 6 ——— 6
- 7 ——— 4
- 8 ——— 5
- 9 ——— 22
- G ——— G

- 1.Label: Orange color with White character
- 2.One Side: Serial Port Adaptors D9/D25
- 3.The Other Side: MINI Adaptor

**Specification:**

- 1.Insulator: PBT Glass Fiber reinforced UL 94VO
- 2.Contact:Brass
- 3.Contact Plating: Gold plated over Nickel
- 4.Shell: Tin Plated Shell
- 5.Current Rating: 3 AMP
- 6.Dielectric Strength: 500V AC for one minute
- 7.Insulator Resistance: 500M min at 500V DC
- 8.Temperature:-25° C ----+105° C



Scale	1:1					Name	Item No. <b>AB467</b>
TOLERANCE					Drawn	11.22.11	
X.X	±0.40				Approved		Title D-Sub RS 232 Adapter, 9 Pin - Male / 25 Pin - Male
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						Drawing No.
							<b>rev00</b>
							Replace
							Sheet



1 2 3 4 5 6 7