

STR730-EVAL evaluation board for STR73xF

Introduction


The STR730-EVAL board is a complete development platform for the STR73x series. It is a cost effective, flexible and open design to demonstrate the capability of the STR730 series of flash micro-controllers and to enable rapid evaluation of the STR73x devices and available peripherals.

It includes the high performance STR730F ARM7TDMITM processor running at up to 36 MHz, that features a rich set of peripherals and serial communication interfaces, including CAN (controller area network), STR730F, SPI EEPROM, I2C EEPROM and an LCD display.

The board can be used as a versatile stand-alone test platform, supporting a CAN interface and a UART RS232 interface, LED displays, 2 x 16 LCDs, piezo buzzer, test buttons, a JTAG connector and an analog channel.

A wide choice of third party development tools are readily available in addition to the those available from STMicroelectronics.

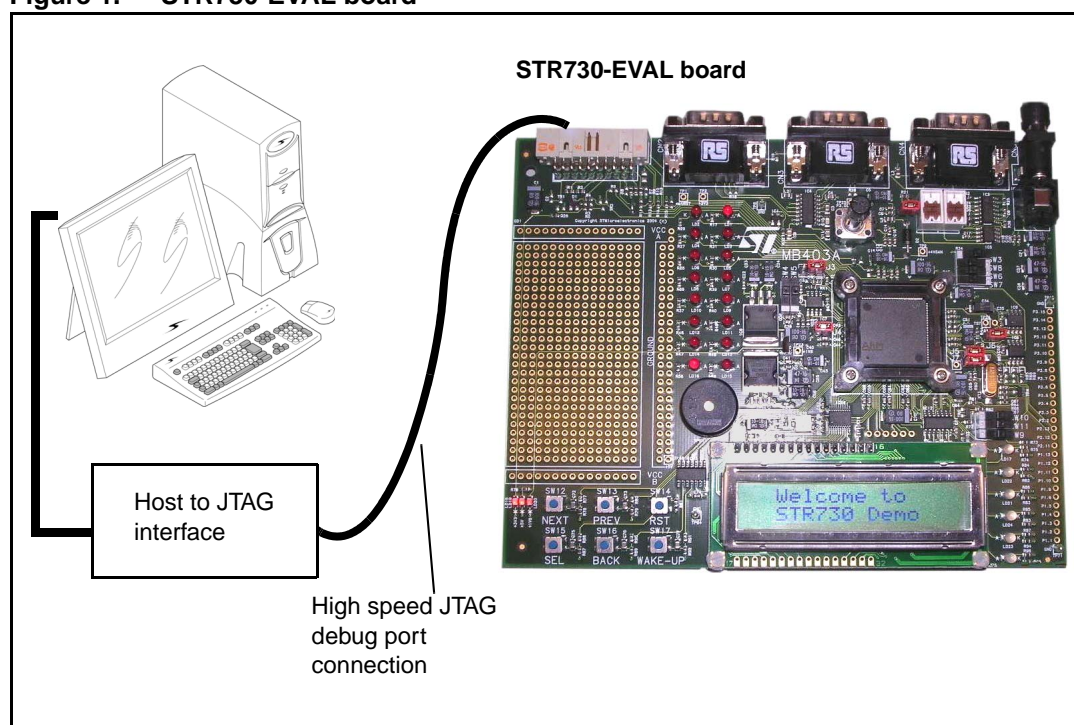Figure 1. STR730-EVAL board



Contents

1	Introduction	3
1.1	Processor and memory devices on this board	3
1.2	Board interface connections	4
1.3	Push buttons	4
1.4	Displays	4
2	Hardware	5
2.1	Overview	7
2.2	Processor	7
2.3	Debug	7
2.4	Prototype area	7
2.5	Reset	7
2.6	Power supplies	7
2.7	CAN interface	7
2.8	RS232 serial interfaces	8
2.9	Analog input	8
2.10	LEDs	8
2.11	Push buttons	9
2.12	Option jumper placement	10
2.13	Option switch settings	11
3	Connectors	14
3.1	CAN bus connector	14
3.2	RS232 serial data connector	14
3.3	Debug	15
3.4	Input/output summary	15
4	Schematics	19
5	Revision history	28

1 Introduction

STMicroelectronics is a global independent semiconductor company that designs, develops, manufactures and markets a broad range of semiconductor integrated circuits and discrete devices used in a wide variety of applications.

The STR730-EVAL board is based on the STR730FZ2T7, a highly integrated microcontroller, running at up to 36 MHz that uses the popular ARM7TDMI™ 32-bit RISC CPU featuring on-chip high speed single voltage flash memory and high-speed RAM, clock generation via PLL, and numerous on-chip peripherals.

This board is intended as low cost development platform to demonstrate the capability of the STR730 series of flash micro-controllers and to enable rapid evaluation of the STR730 devices and available peripherals.

The STR730-EVAL board has 8-Kbit SPI EEPROM and 8-Kbit I²C EEPROM and supports CAN and RS232 interfaces. It includes a 2 x 16 programmable LCD display supported by select, next, back, previous and wake-up push buttons.

The hardware platform of the STR730F series is supported by an extensive software support package, including device drivers in ANSI C source form and demonstration software. It is flashed with a demonstration application that shows the basic features of the device. Development tools are readily available. This is complemented by a range of third party real-time OS and middleware.

Design schematics can also be supplied in electronic format to those customers with compatible design environments.

Note: ARM® and ARM7TDMI™ are registered trademarks of ARM Limited in the EU and other countries.

1.1 Processor and memory devices on this board

- STR730F ARM7TDMI™ processor running at up to 36 MHz, IC11:
 - 144-pin TQFP version,
 - 256 Kbytes flash program memory,
 - 16 Kbytes RAM,
 - embedded 1.8 V voltage regulator for core supply,
 - nested interrupt controller.
- Clocking is performed by a surface mounted 8 MHz quartz.
- Serial ROMs:
 - 8-Kbit SPI EEPROM connected to the buffered serial peripheral interface (BSPi2): IC7,
 - I²C EEPROM: 8-Kbit EEPROM connected to the I²C0 interface: IC8.

1.2 Board interface connections

Diagrams and wiring descriptions for these connectors are provided in [Chapter 4: Schematics on page 19](#). The following connections are supported by the board:

- CAN uses a single 9 D-type connector with microswitch selectable low or high speed transceiver: CN4
- UART0 (Rx and Tx only) connected to a 9-way male D-type RS232 connector: CN2
- UART1 (Rx and Tx only) connected to a 9-way male D-type RS232 connector: CN3
- JTAG, 20 pin IDC connector: CN1
- variable resistor, voltage range 0 to 4.5 V: R33
- LM35 temperature sensor: IC9
- prototype area: GD1
- test points, various test points are located throughout the board, for details see [Chapter 4: Schematics on page 19](#)
- main power supply: CN5

1.3 Push buttons

The following push buttons are provided:

- next (NEXT), programmable switch: SW12
- previous (PREV), programmable switch: SW13
- reset (RST), board reset: SW14
- select (SEL), programmable switch: SW15
- back (BACK), programmable switch: SW16
- wakeup (WAKE-UP), push button to bring processor out of low power mode: SW17

1.4 Displays

The following LCD and LEDs are provided:

- LCD display, 2x16 LCD display connected to a general purpose input/output LCD interface; green back light display: LCD1
- surface mount red, +5 V power indicator: LD19
- bi-color red/green: LD17, LD21, LD22, LD23, LD24, LD25
- low consumption LEDs red: LD1, LD2, LD3, LD4, LD5, LD6, LD7, LD8, LD9, LD10, LD11, LD12, LD13, LD14, LD15, LD16

2 Hardware

Figure 2. STR730-EVAL board layout block diagram

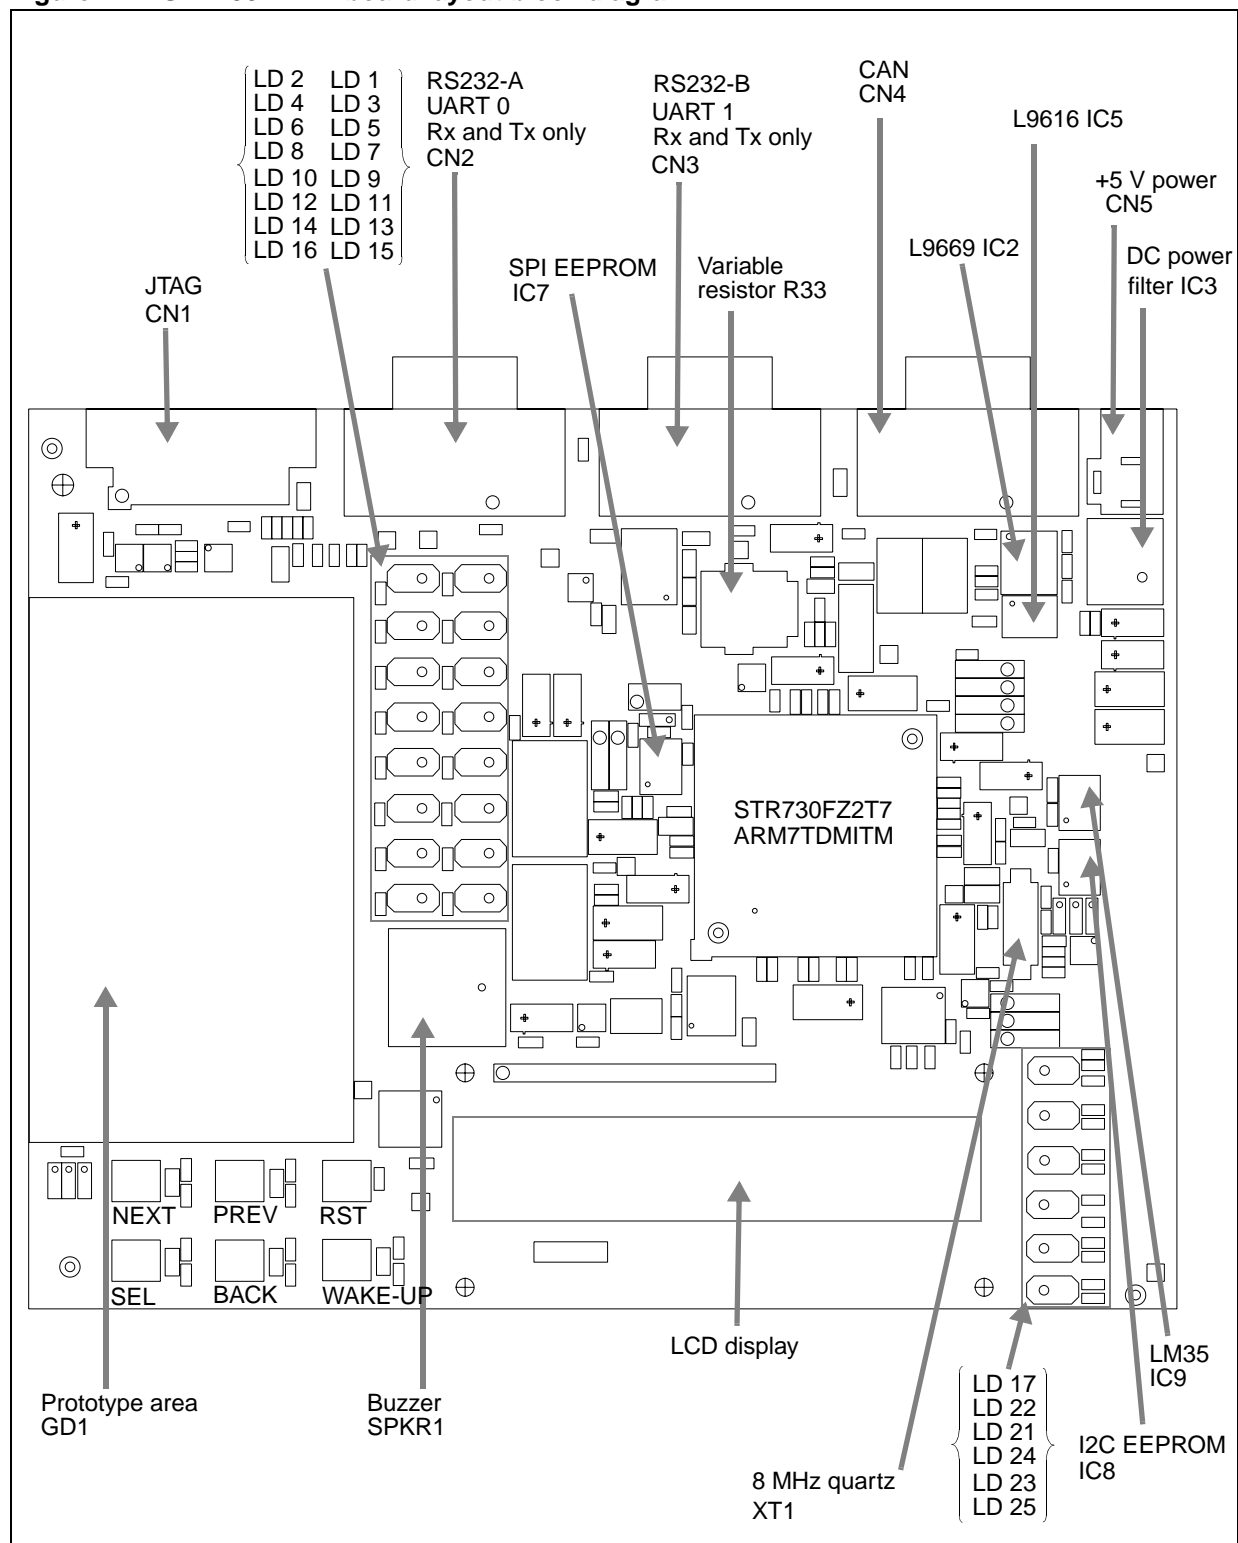
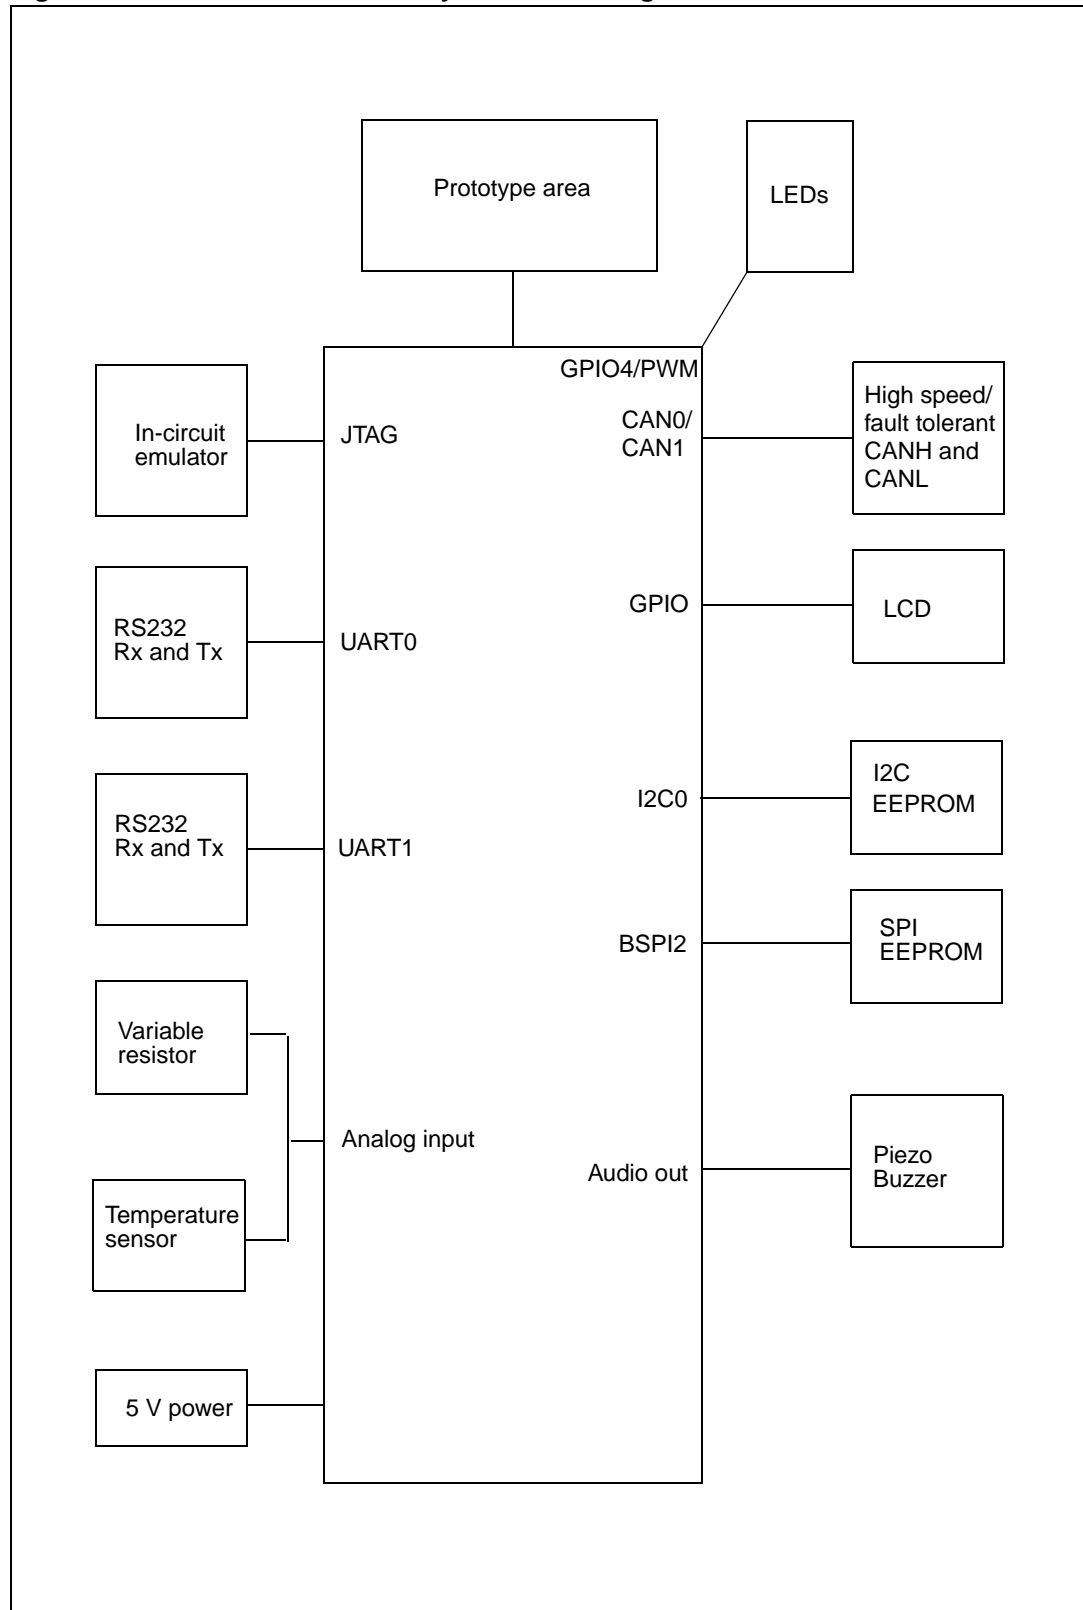


Figure 3. STR730-EVAL board system block diagram

2.1 Overview

The STR730-EVAL board is a general purpose evaluation platform with CAN (controller area network), and RS232 interfaces.

2.2 Processor

The board supports the STR730FZ2T7 ARM7TDMITM silicon - 144-pin TQFP version. This chip runs at a frequency of up to 36 MHz.

Boot modes and configuration options are set using microswitches.

2.3 Debug

Software debug uses a standard 20-pin JTAG connection. This may connect to a standard host to JTAG interface.

2.4 Prototype area

A 2.54 x 2.54 mm gridded area of 1mm holes is available for prototyping using wire wrap or similar prototyping techniques.

2.5 Reset

The reset sources are:

- power on reset,
- push button reset,
- JTAG reset from an in-circuit emulator.

2.6 Power supplies

Power to the board is supplied using a lump in cord power supply providing 5 V to the board. All other required voltages are provided by on-board voltage regulators.

2.7 CAN interface

A general purpose, asynchronous serial I/O data port connected through a 9-pin D-type male connector with microswitch selectable low speed fault tolerant transceiver (L9669) or low or high speed selectable transceiver (L9616). See [Section 3.1: CAN bus connector on page 14](#).

The L9669 transceiver only works in normal mode, the wake-up functionality is not implemented.

2.8 RS232 serial interfaces

Two general purpose, asynchronous serial I/O data ports are connected through 9-pin D-type male connectors refer to [Section 3.2: RS232 serial data connector on page 14](#).

RS232-A connects directly to UART0, transmit and receive only. RS232-B connects to UART1, transmit and receive only.

RTS is shorted to CTS and DTR is shorted to DSR at the connector for both interfaces.

2.9 Analog input

The following analog inputs are provided, see the schematics [Figure 10 on page 19](#):

- LM35 temperature sensor IC9 is connected to AIN1,
- variable resistor R33 is connected to AIN0.

2.10 LEDs

2.10.1 Software controlled LEDs

The LEDs in [Table 1](#) are software controlled by PIO pins.

Table 1. Software controlled LEDs

LED	Connected to	Color	Schematic
LD1	P4_0	Red	Figure 15 on page 24
LD2	P4_1		
LD3	P4_2		
LD4	P4_3		
LD5	P4_4		
LD6	P4_5		
LD7	P4_6		
LD8	P4_7		
LD9	P4_8		
LD10	P4_9		
LD11	P4_10		
LD12	P4_11		
LD13	P4_12		
LD14	P4_13		
LD15	P4_14		
LD16	P4_15		

Table 1. Software controlled LEDs (continued)

LED	Connected to	Color	Schematic
LD17	PWM5_P2.7	Red/green	<i>Figure 10 on page 19</i>
LD21	PWM3_P2.5		
LD22	PWM4_P2.6		
LD23	PWM1_P2.3		
LD24	PWM2_P2.4		
LD25	PWM0_P2.0		

2.10.2 Status LED

LD19 is the +5 V power indicator. This LED is red, see *Figure 11 on page 20*.

2.11 Push buttons

The schematic diagram for the push buttons is in *Figure 10 on page 19*.

Table 2. Push buttons

Button	Connected to
Next SW12	INT6_P5.8
Previous SW13	INT7_P5.9
Board reset SW14	notRSTIN
Select SW15	INT8_P5.10
Back SW16	INT9_P5.11
Wake-up SW17	WUP16_P2.10

2.12 Option jumper placement

Figure 4. Option jumpers and switches

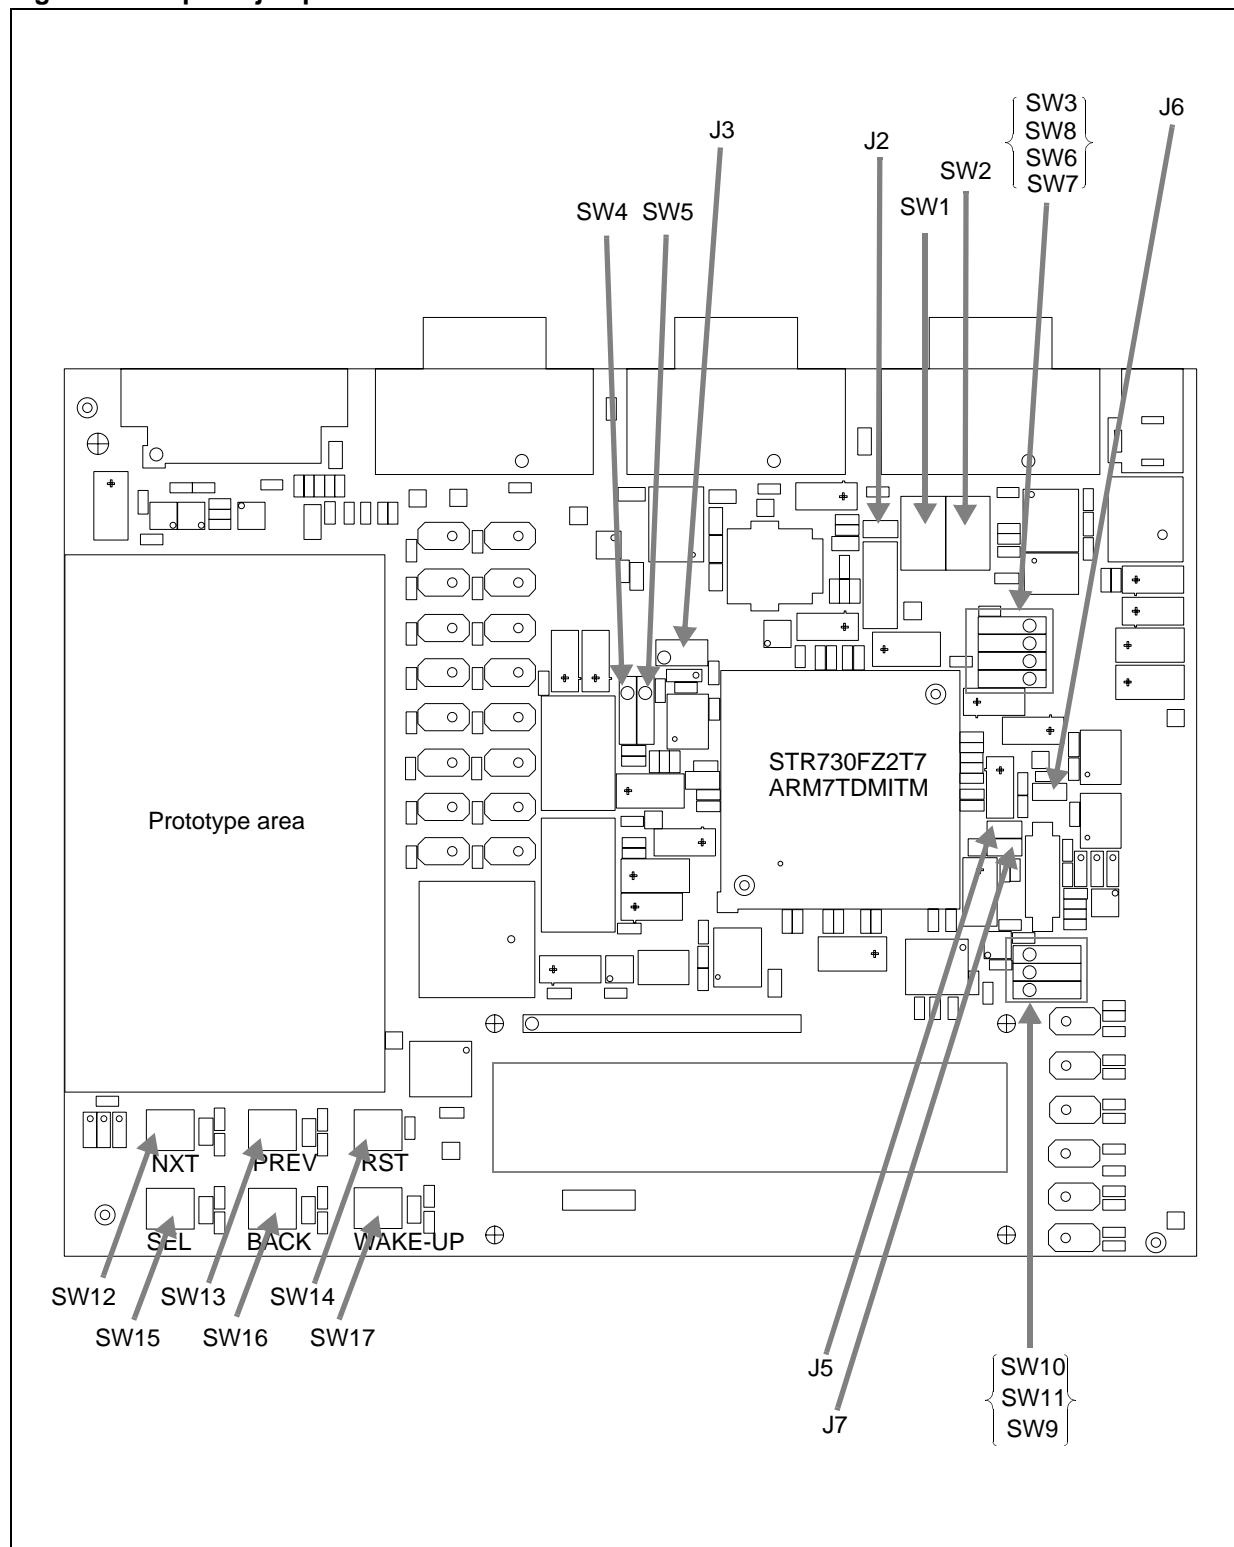
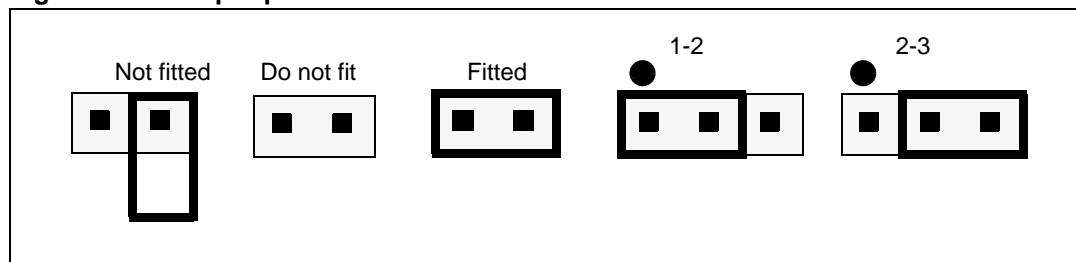


Table 3. Option jumpers

Jumper	Schematic	Description	Default
J2	Figure 17 on page 26	CAN link: not fitted / fitted (default)	Fitted
J3	Figure 11 on page 20	CPUIO: +5 V	Fitted
J5	Figure 10 on page 19	XTAL2	Fitted
J6	Figure 10 on page 19	TST pull-down	Fltted
J7	Figure 10 on page 19	XTAL1	Fitted

Jumpers are fitted as shown in [Figure 5](#):

Figure 5. Jumper positions

2.13 Option switch settings

Table 4. Option switch settings

Switch	Schematic	Description	Default
SW1	Figure 17 on page 26	CAN transceiver select: L9669 / L9616 (default)	A
SW2		Note SW1 and SW2 must be changed together. 1 = L9669 A = L9616	A
SW3	Figure 17 on page 26	L9616 ASC speed: 1-2 = pull down = high speed 2-3 = pull up = low speed	2-3
SW4	Figure 13 on page 22	SPI EEPROM notW: 1-2 = pull down = Write protect 2-3 = pull up = Write enabled	2-3
SW5	Figure 13 on page 22	SPI EEPROM notHOLD: 1-2 = pull down = SPI EEPROM in "hold mode" 2-3 = pull up = SPI EEPROM in "normal mode"	2-3
SW6	Figure 10 on page 19	CAN device select: channel 0 / channel 1 Note SW6 and SW8 must be changed together. 1-2 = channel 0 2-3 = channel 1	1-2
SW7	Figure 18 on page 27	I ² C EEPROM write control (notWC): 1-2 = pull down = enable writes to EEPROM 2-3 = pull up = disable writes to EEPROM	1-2

Table 4. Option switch settings (continued)

Switch	Schematic	Description	Default
SW8	Figure 10 on page 19	CAN device select: channel 0 / channel 1 Note SW6 and SW8 must be changed together. 1-2 = channel 0 2-3 = channel 1	1-2
SW9	Figure 10 on page 19	Bit Boot M0, boot from internal flash, see Table 5 . 1-2 = M0 low 2-3 = M0 high	1-2
SW10	Figure 10 on page 19	SPEAKER Channel OCPMA0 / OCPMA1 (default)	1-2
SW11	Figure 10 on page 19	Bit Boot M1, boot from internal flash, see Table 5 . 1-2 = M1 low 2-3 = M1 high	1-2
SW12	Figure 10 on page 19	Next	Push to make
SW13	Figure 10 on page 19	Previous	Push to make
SW14	Figure 10 on page 19	Reset	Push to make
SW15	Figure 10 on page 19	Select	Push to make
SW 16	Figure 10 on page 19	Back	Push to make
SW 17	Figure 10 on page 19	Wake up	Push to make

For switch position details, see [Figure 6](#).

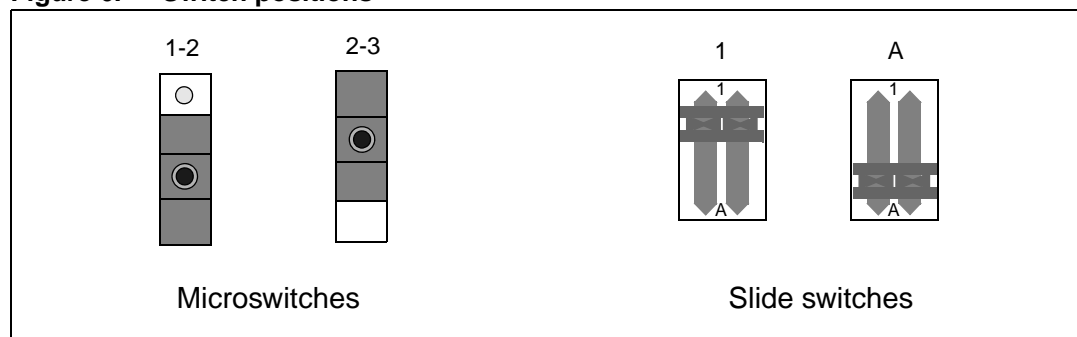












Figure 6. Switch positions

Table 5. Boot modes

BootM1 SW11	BootM0 SW9	Mode	Memory mapping	Note	
1-2	1-2	User1	Flash sector B0F0 mapped at 0h	All flash sectors visible except system memory sector	<div>STR730</div> <div>  SW10 BOOT M1  SW11 BOOT M0  SW9 </div>
1-2	2-3	User2	Flash sector B0F0 mapped at 0h	Flash B0F1 sector and system memory sector not visible	<div>STR730</div> <div>  SW10 BOOT M1  SW11 BOOT M0  SW9 </div>
2-3	1-2	Boot	System memory mapped at 0h	-	<div>STR730</div> <div>  SW10 BOOT M1  SW11 BOOT M0  SW9 </div>
2-3	2-3	Reserved	-	.	<div>STR730</div> <div>  SW10 BOOT M1  SW11 BOOT M0  SW9 </div>

3 Connectors

3.1 CAN bus connector

Figure 7. CAN connector 9 pin male D-type: CN4

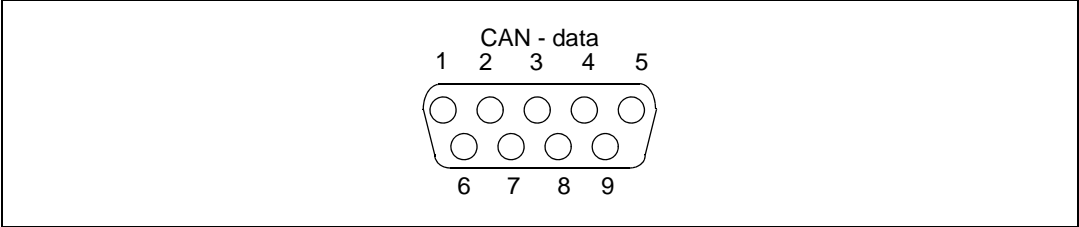


Table 6. CAN connector pinout: CN4

Pin	Description	Pin	Description	Pin	Description
1	Not connected	4	Not connected	7	CAN H, high side bus output
2	CAN L, low side bus output	5	Not connected	8	Pull down to ground
3	Ground	6	Ground	9	Pull up to +5 V

3.2 RS232 serial data connector

9-pin general purpose D-type male connectors.

Figure 8. RS232 transmit and receive connectors: CN2, CN3

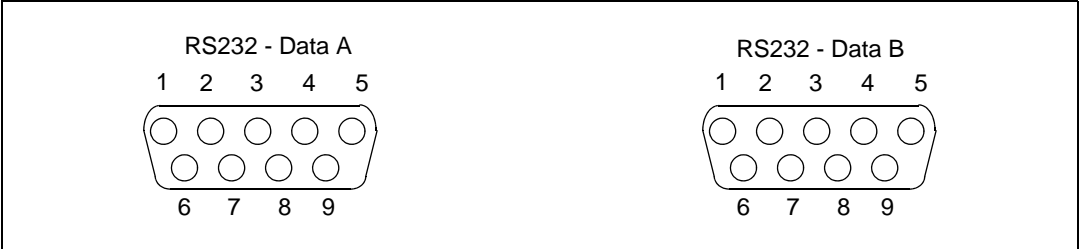


Table 7. RS232 connector pinout: CN2, CN3

Pin	Description	Pin	Description	Pin	Description
1	Shorted to pin 4 and 6	4	Shorted to pin 1 and 6	7	Shorted to pin 8
2	R1IN (port A), R2IN (port B)	5	Ground	8	Shorted to pin 7
3	T1OUT (port A), T2OUT (port B)	6	Shorted to pin 1 and 4	9	Not connected

3.3 Debug

Figure 9. JTAG standard interface: CN1

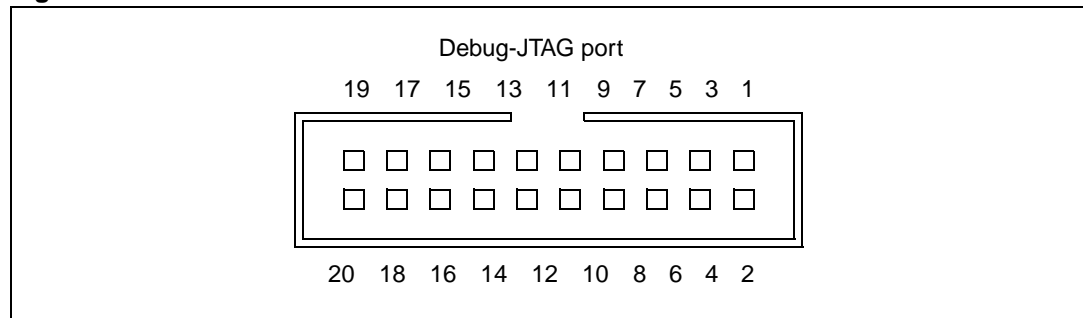


Table 8. JTAG interface pinout: CN1

Pin	Description	Pin	Description	Pin	Description
4, 6, 8, 10, 12, 14, 16, 18, 20	Ground	5	TDI	13	TD0
1	VTref +5 V	7	TMS	15	notReset
2	Vsupply +5 V	9	TCK	17	DBGQRS - pulled low
3	notTRST	11	RTCK (GROUND)	19	DBGACK - pulled low

Note: In order for hardware and JTAG RESET to be synchronized, (R3, R6, R5, C2, TR2, TR1) have to be fitted, see [Figure 16: ARM JTAG interface on page 25](#).

3.4 Input/output summary

Table 9. STR730-EVAL board input/output summary

Port	Peripheral	Alternate function	Interrupt
P0.0	LCD_D0	OCMPB2	
P0.1	LCD_D1	OCMPA2	
P0.2	LCD_D2	ICAPA2	
P0.3	LCD_D3	ICAPB2	
P0.4	LCD_D4	OCMPA5	
P0.5	LCD_D5	OCMPB5	
P0.6	LCD_D6	ICAPA5	
P0.7	LCD_D7	ICAPB5	
P0.8	LCD_RS	OCMPA6	
P0.9	LCD_nE	OCMPB6	
P0.10	LCD_RW	OCMPA7	
P0.11	TP52	OCMPB7	
P0.12	TP53	ICAPA3	

Table 9. STR730-EVAL board input/output summary (continued)

Port	Peripheral	Alternate function	Interrupt
P0.13	TP54	ICAPB3	
P0.14	TP55	OCMPB3	
P0.15	TP56	OCMPA3	
P1.0	TP57	OCMPA4	
P1.1	Test Point	OCMPB4	
P1.2	Test Point	ICAPB4	
P1.3	Test Point	ICAPA4	
P1.4	Test Point		
P1.5	Test Point		
P1.6	Test Point	OCMPB1	
P1.7	PIEZO (SW10-1)	OCMPA1	
P1.8	PIEZO (SW10-3)	OCMPA0	INT0
P1.9	Test Point	OCMPB0	INT1
P1.10	Test Point		WUP28
P1.11	Test Point		WUP29
P1.12	Test Point		WUP30
P1.13	Test Point		WUP31
P1.14	CAN_RX (SW6-1)	CAN0RX	WUP12
P1.15	CAN_TX (SW8-1)	CAN0TX	
P2.0	BiColor LED - LD25	PWM0	
P2.1	CAN_RX (SW6-3)	CAN1RX	WUP13
P2.2	CAN_TX (SW8-3)	CAN1TX	
P2.3	BiColor LED - LD23	PWM1	
P2.4	BiColor LED - LD24	PWM2	
P2.5	BiColor LED - LD21	PWM3	
P2.6	BiColor LED - LD22	PWM4	
P2.7	BiColor LED - LD17	PWM5	
P2.8	UART_TXB	UART1_TX	
P2.9	UART_RXB	UART1_RX	WUP14
P2.10	SW_WAKEUP		WUP16
P2.11	Test Point		WUP17
P2.12	I2C_E1 / TP		INT14
P2.13	I2C_E2 / TP		INT15
P2.14	I2C_SCL	SCL0	
P2.15	I2C_SDA	SDA0	


Table 9. STR730-EVAL board input/output summary (continued)

Port	Peripheral	Alternate function	Interrupt
P3.0	10K_POT	AIN0	
P3.1	LM35_THERM	AIN1	
P3.2	Test Point	AIN2	
P3.3	Test Point	AIN3	
P3.4	Test Point	AIN4	
P3.5	Test Point	AIN5	
P3.6	Test Point	AIN6	
P3.7	Test Point	AIN7	
P3.8	Test Point	AIN8	
P3.9	Test Point	AIN9	
P3.10	Test Point	AIN10	
P3.11	Test Point	AIN11	
P3.12	Test Point	AIN12	INT2
P3.13	Test Point	AIN13	INT3
P3.14	Test Point	AIN14	INT4
P3.15	Test Point	AIN15	INT5
P4.0	LED_LD1	ICAPA7	
P4.1	LED_LD2	ICAPB7	
P4.2	LED_LD3	ICAPA8	
P4.3	LED_LD4	ICAPB8	
P4.4	LED_LD5		
P4.5	LED_LD6		WUP18
P4.6	LED_LD7	SCL1	WUP19
P4.7	LED_LD8	SDA1	
P4.8	LED_LD9	OCMPA8	
P4.9	LED_LD10	ICAPB6	
P4.10	LED_LD11	ICAPA6	WUP20
P4.11	LED_LD12	OCMPB8	
P4.12	LED_LD13	ICAPA9	WUP21
P4.13	LED_LD14	ICAPB9	
P4.14	LED_LD15	nSS1	
P4.15	LED_LD16	SCLK1	WUP22
P5.0	TP7	MOSI1	
P5.1	TP6	MISO1	
P5.2	TP5	OCMPA9	

Table 9. STR730-EVAL board input/output summary (continued)

Port	Peripheral	Alternate function	Interrupt
P5.3	M95_EE_CS	OCMPB9	
P5.4	CPU_IO	nSS2	
P5.5	M95_EE_CLK	SCLK2	WUP23
P5.6	M95_EE_MOSI	MOSI2	
P5.7	M95_EE_MISO	MISO2	
P5.8	SW_NEXT		INT6
P5.9	SW_PREV		INT7
P5.10	SW_SEL		INT8
P5.11	SW_BACK		INT9
P5.12	TP4		INT10
P5.13	TP3		INT11
P5.14	TP10		INT12
P5.15	TP14		INT13
P6.0	TP13		WUP0
P6.1	TP12		WUP1
P6.2	TP11		WUP2
P6.3	TP20		WUP3
P6.4	TP17		WUP4
P6.5	TP18		WUP5
P6.6	TP22		WUP6
P6.7	TP21		WUP7
P6.8	UART_RXA	UART0_RX	WUP10
P6.9	UART_TXA	UART0_TX	
P6.10	TP19		
P6.11	TP36	MISO0	
P6.12	TP34	MOSI0	
P6.13	TP38	SCLK0	WUP11
P6.14	TP37	nSS0	
P6.15	TP35		WUP9

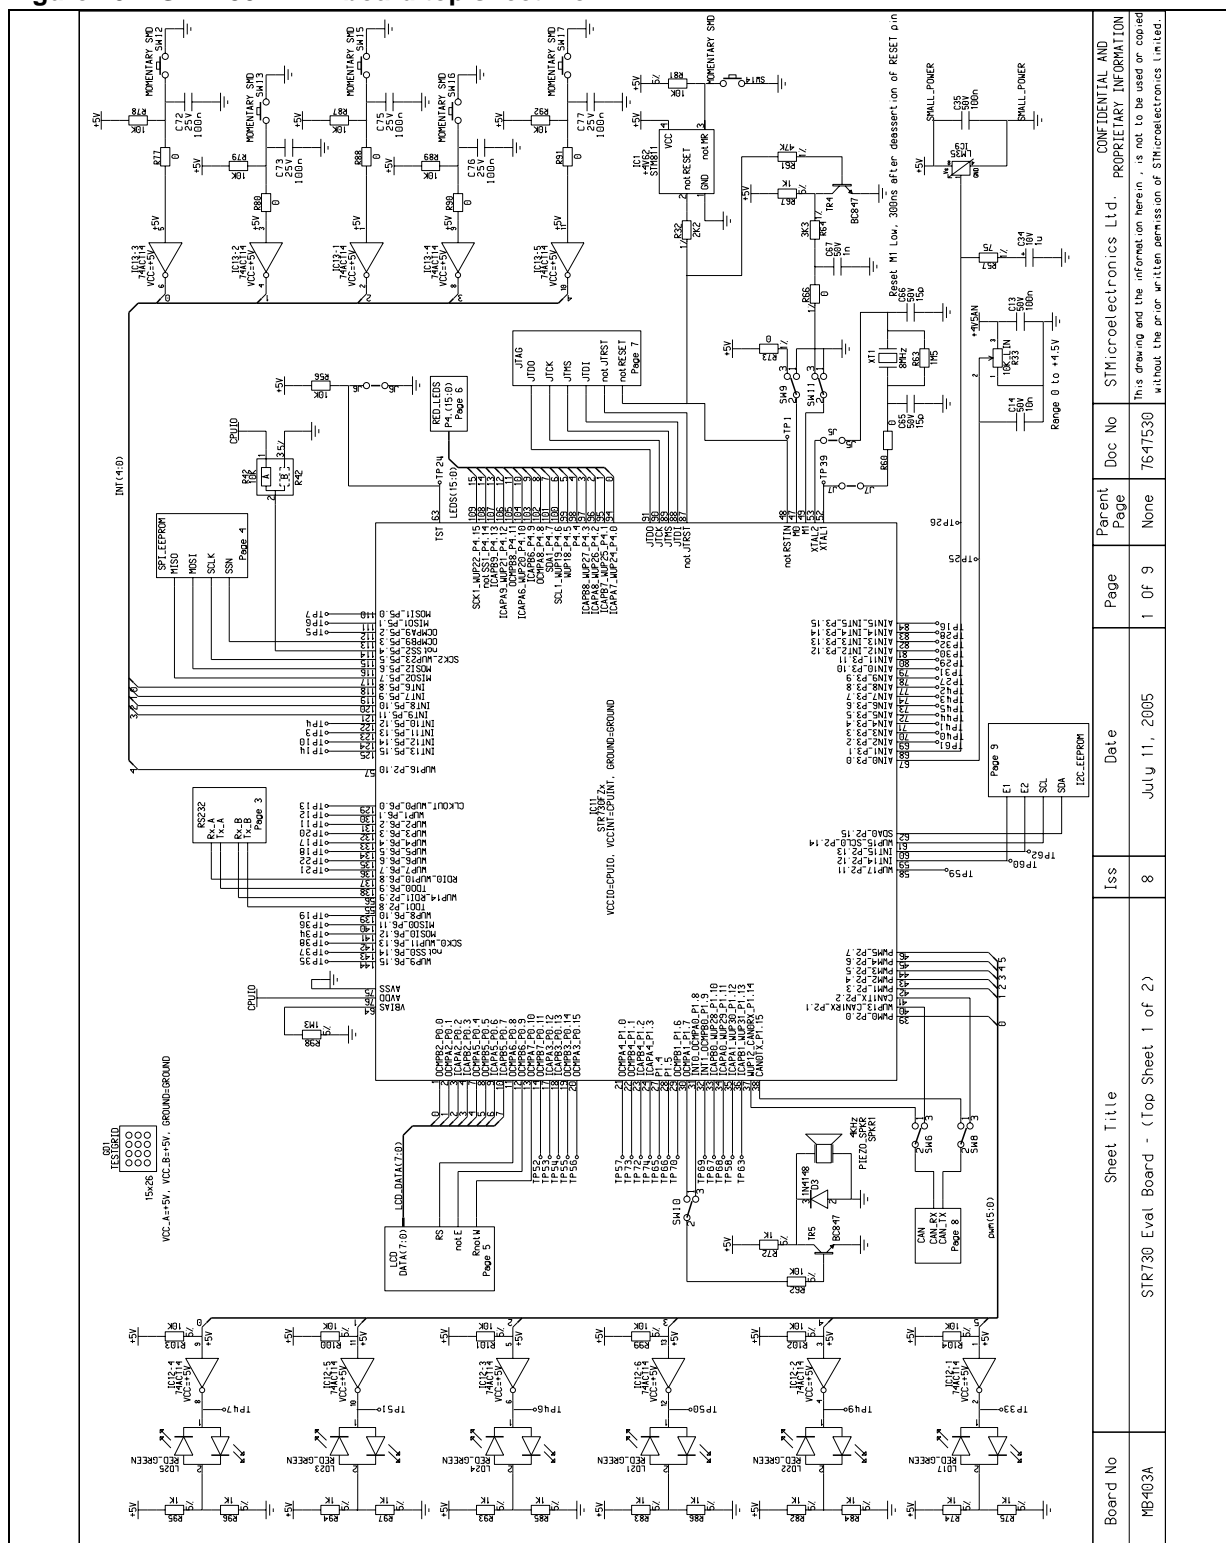Figure 10. STR730-EVAL board top sheet 1 of 2



20/29



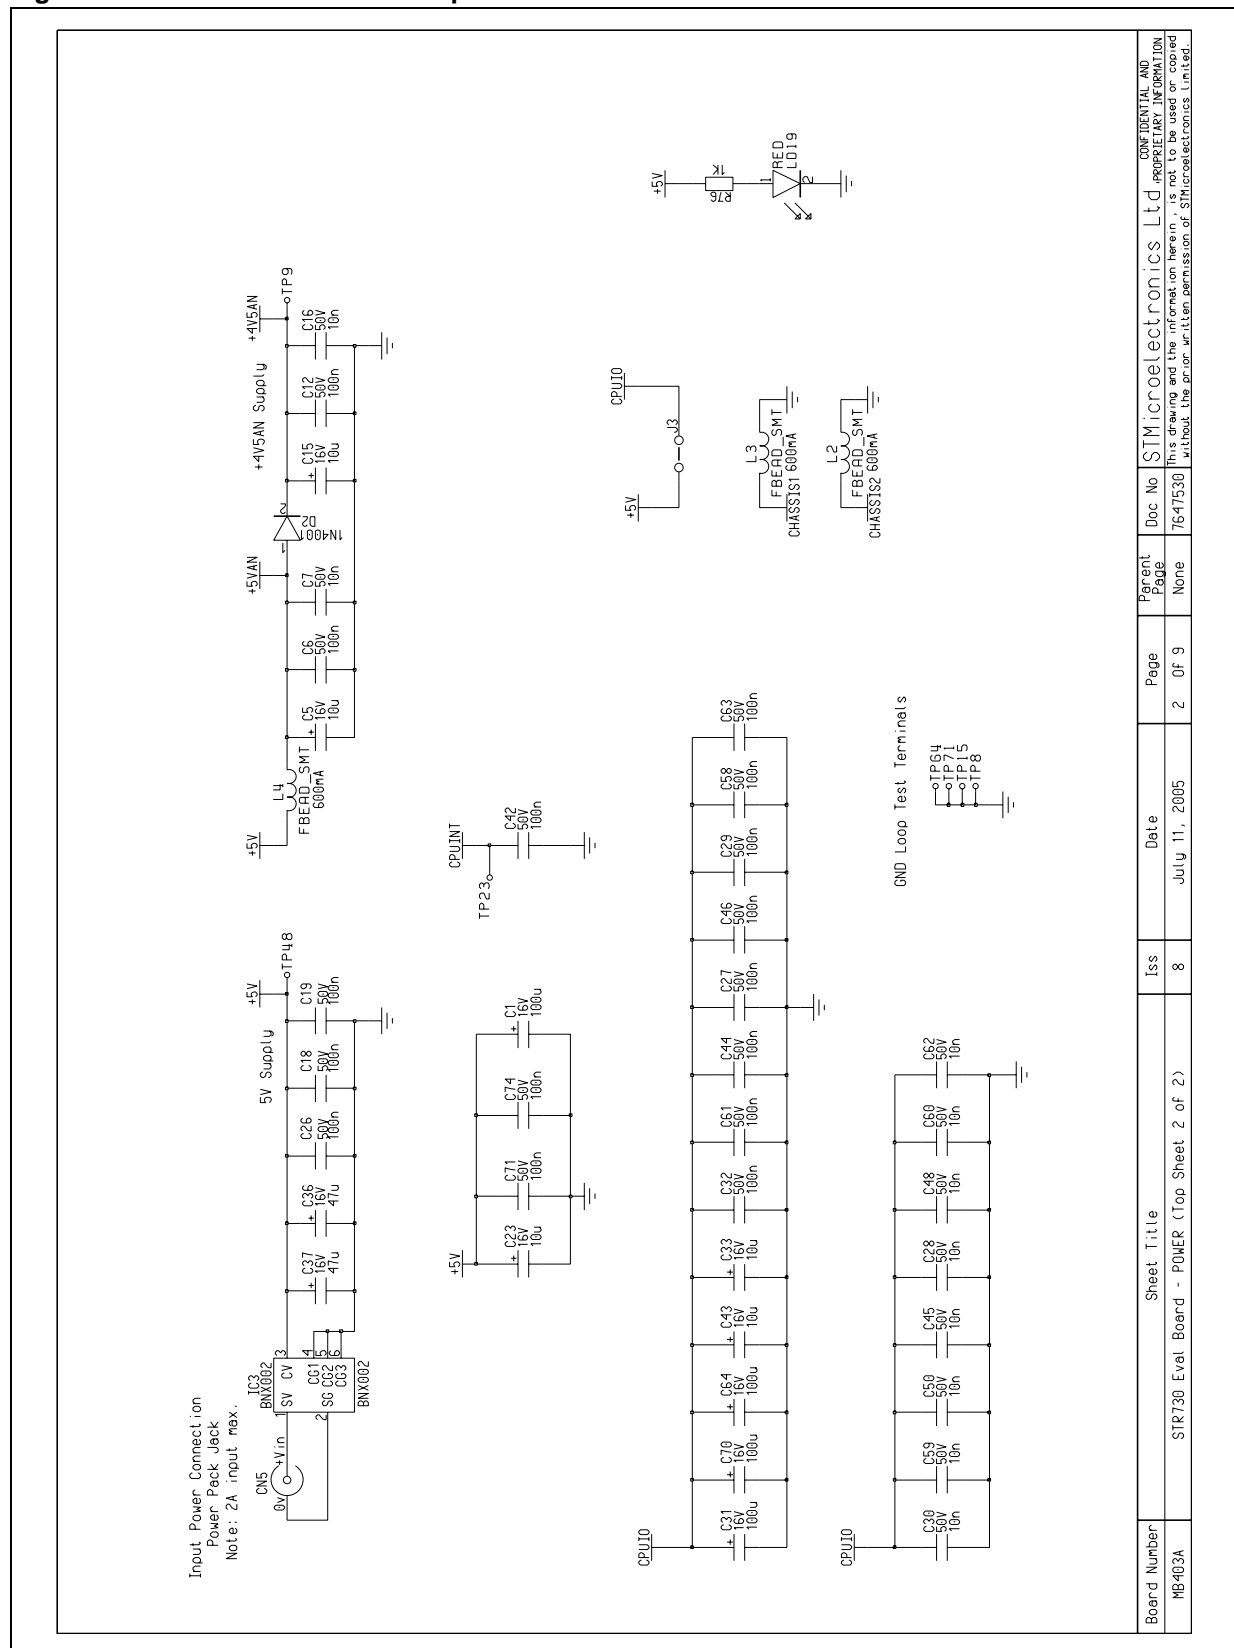


Figure 12. RS232 interface

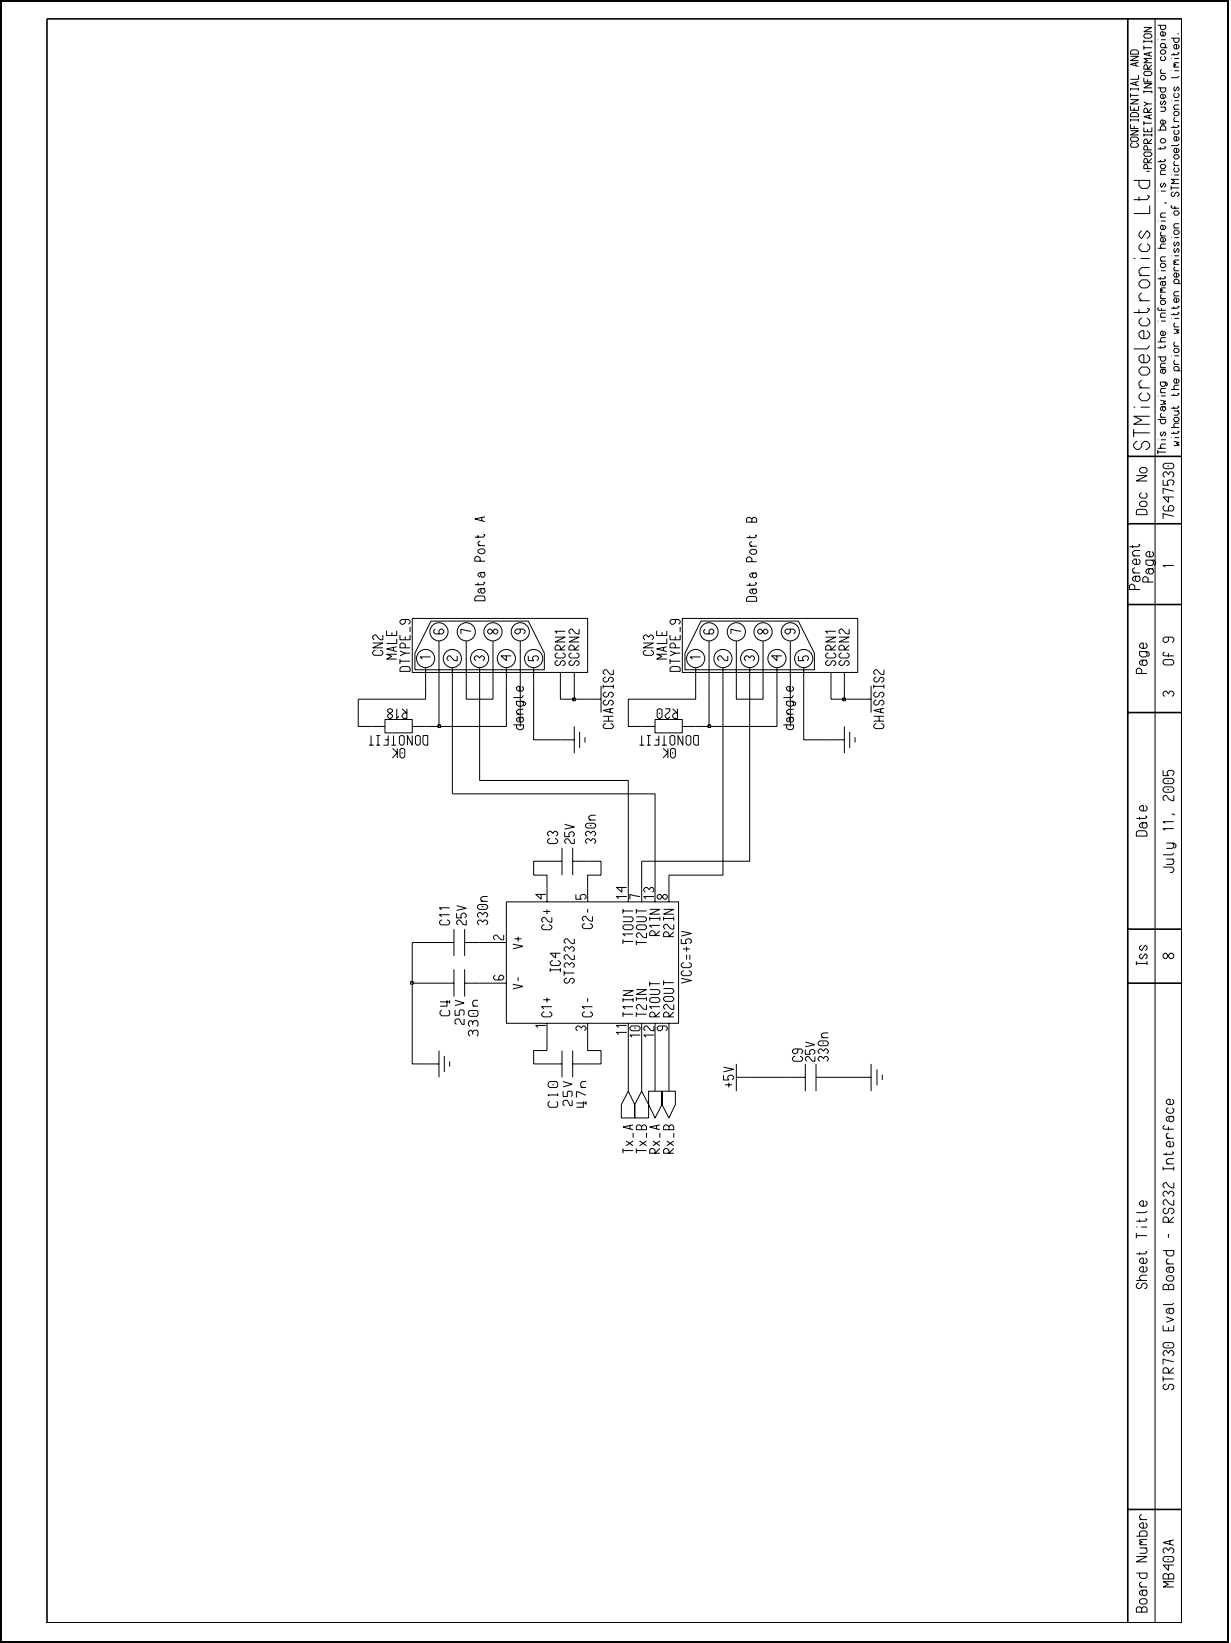


Board Number MB403A	Sheet Title STR730 Eval Board - SPI EEPROM Interfaces	Iss 8	Date July 11, 2005	Page 4 OF 9	Parent Page 1	Doc No 7647530	STMicroelectronics Ltd	CONFIDENTIAL AND PROPRIETARY INFORMATION This drawing and the information herein, is not to be used or copied without the prior written permission of STMicroelectronics Limited.
------------------------	--	----------	-----------------------	----------------	---------------------	-------------------	------------------------	--

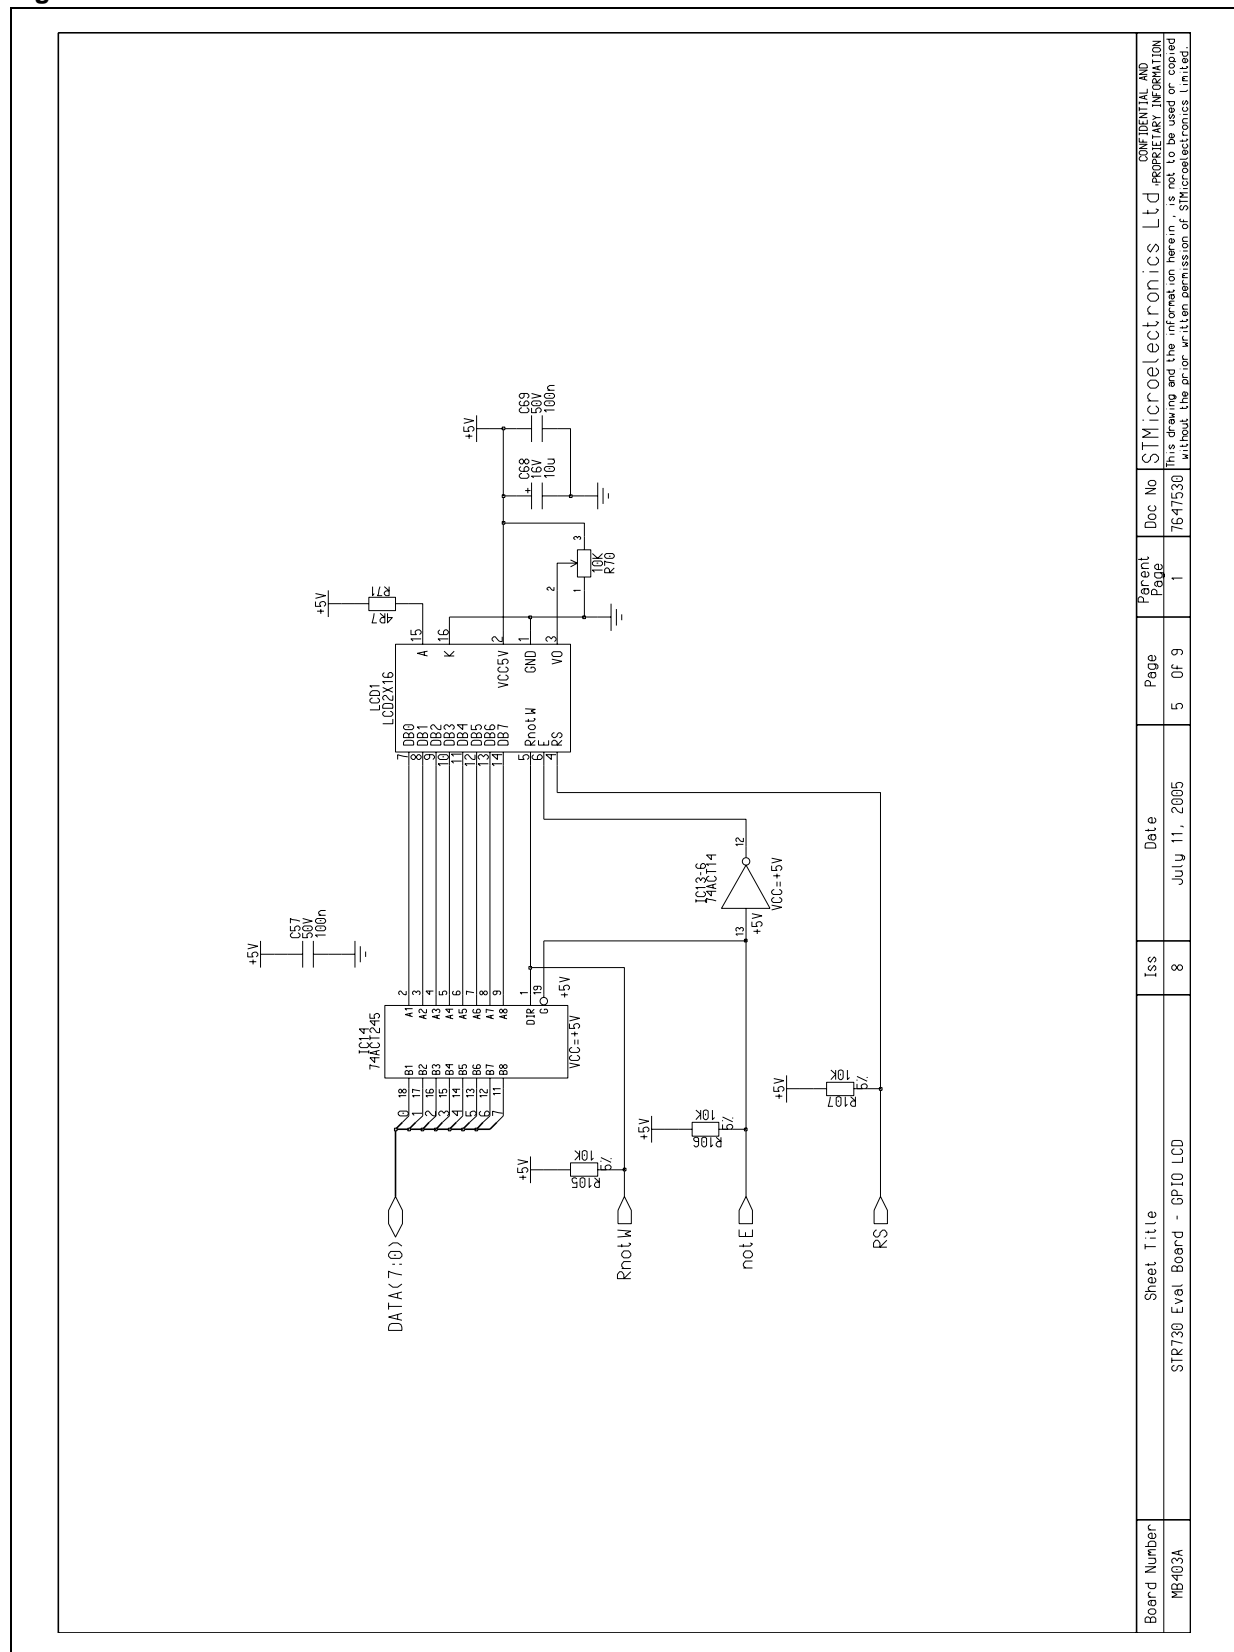Figure 14. GPIO LCD



Board Number MB403A	Sheet Title STR730 Eval Board - LEDs Interfaces	Iss 8	Date July 11, 2005	Page 6 Of 9	Parent Page 1	Doc No 7647530	STMicroelectronics Ltd CONFIDENTIAL AND PROPRIETARY INFORMATION This drawing and the information herein is provided without the prior written permission of STMicroelectronics Limited.
------------------------	--	----------	-----------------------	----------------	---------------------	-------------------	---

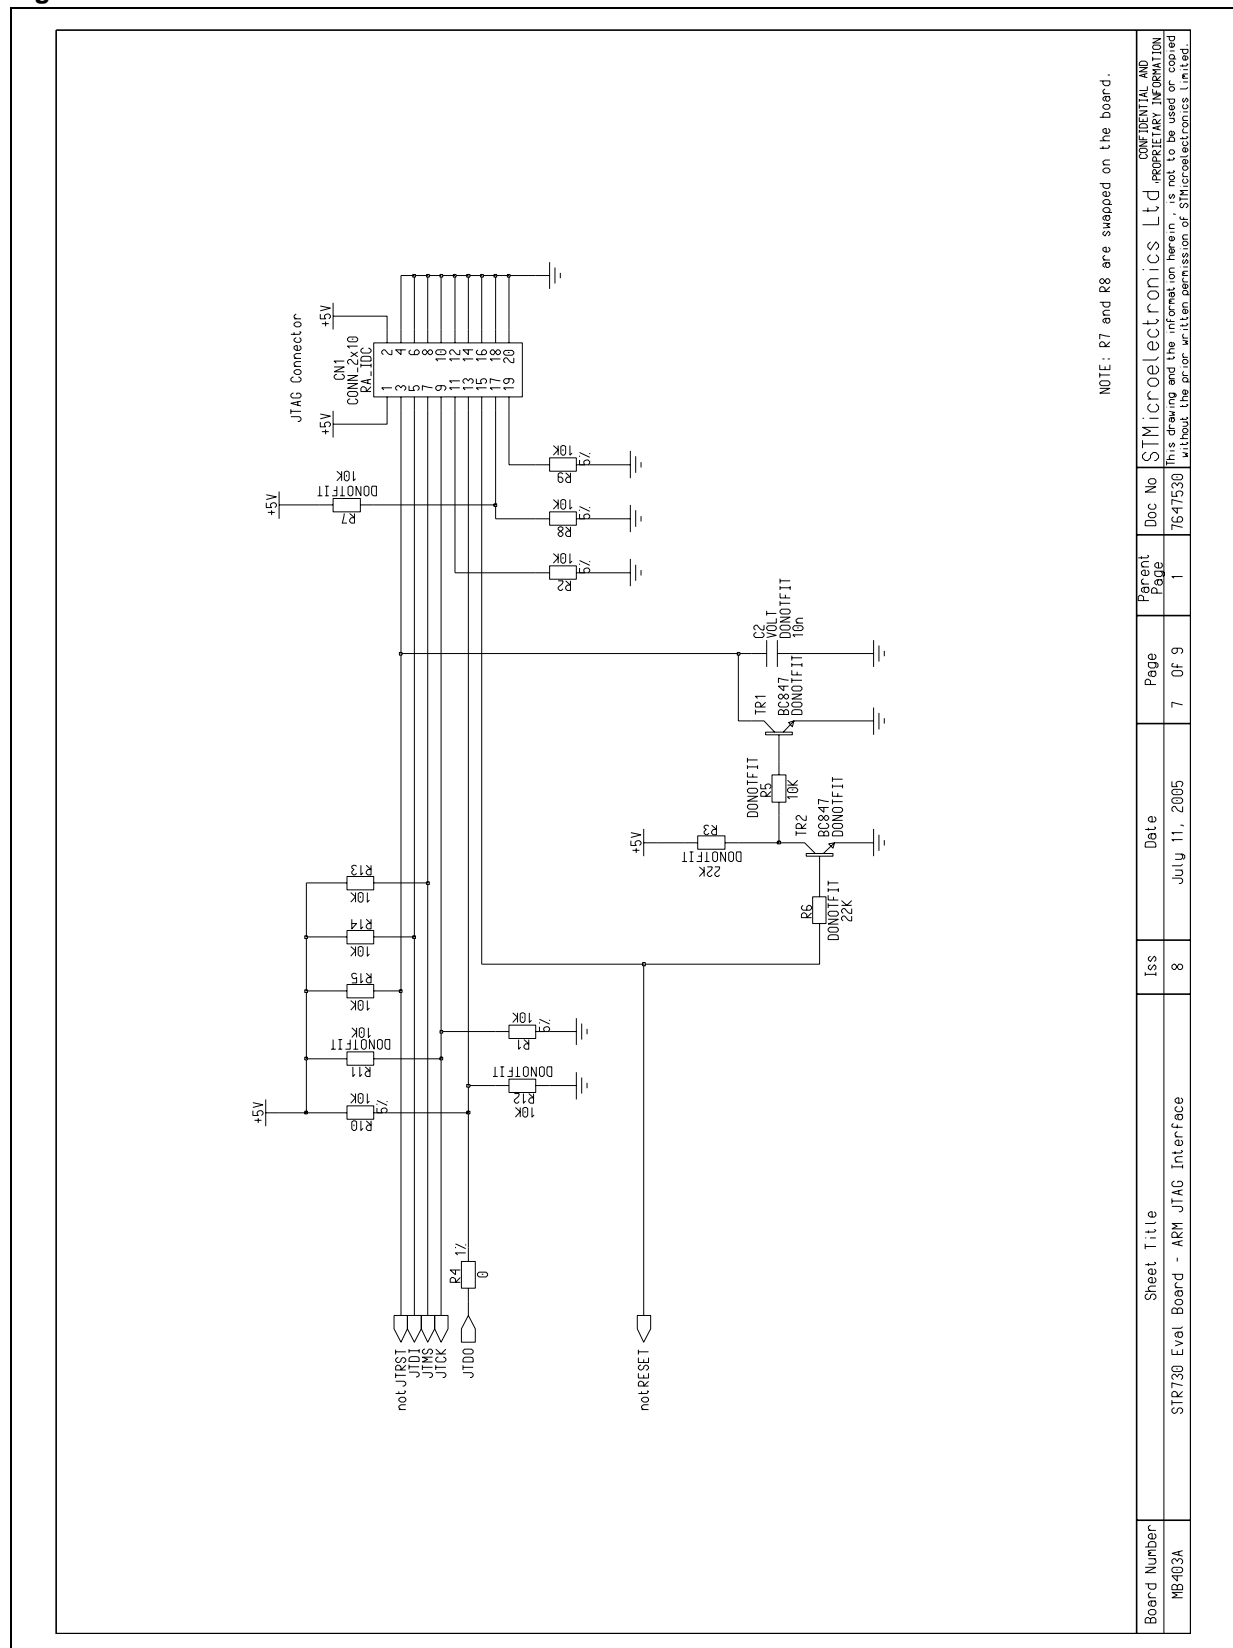Figure 16. ARM JTAG interface



26/29


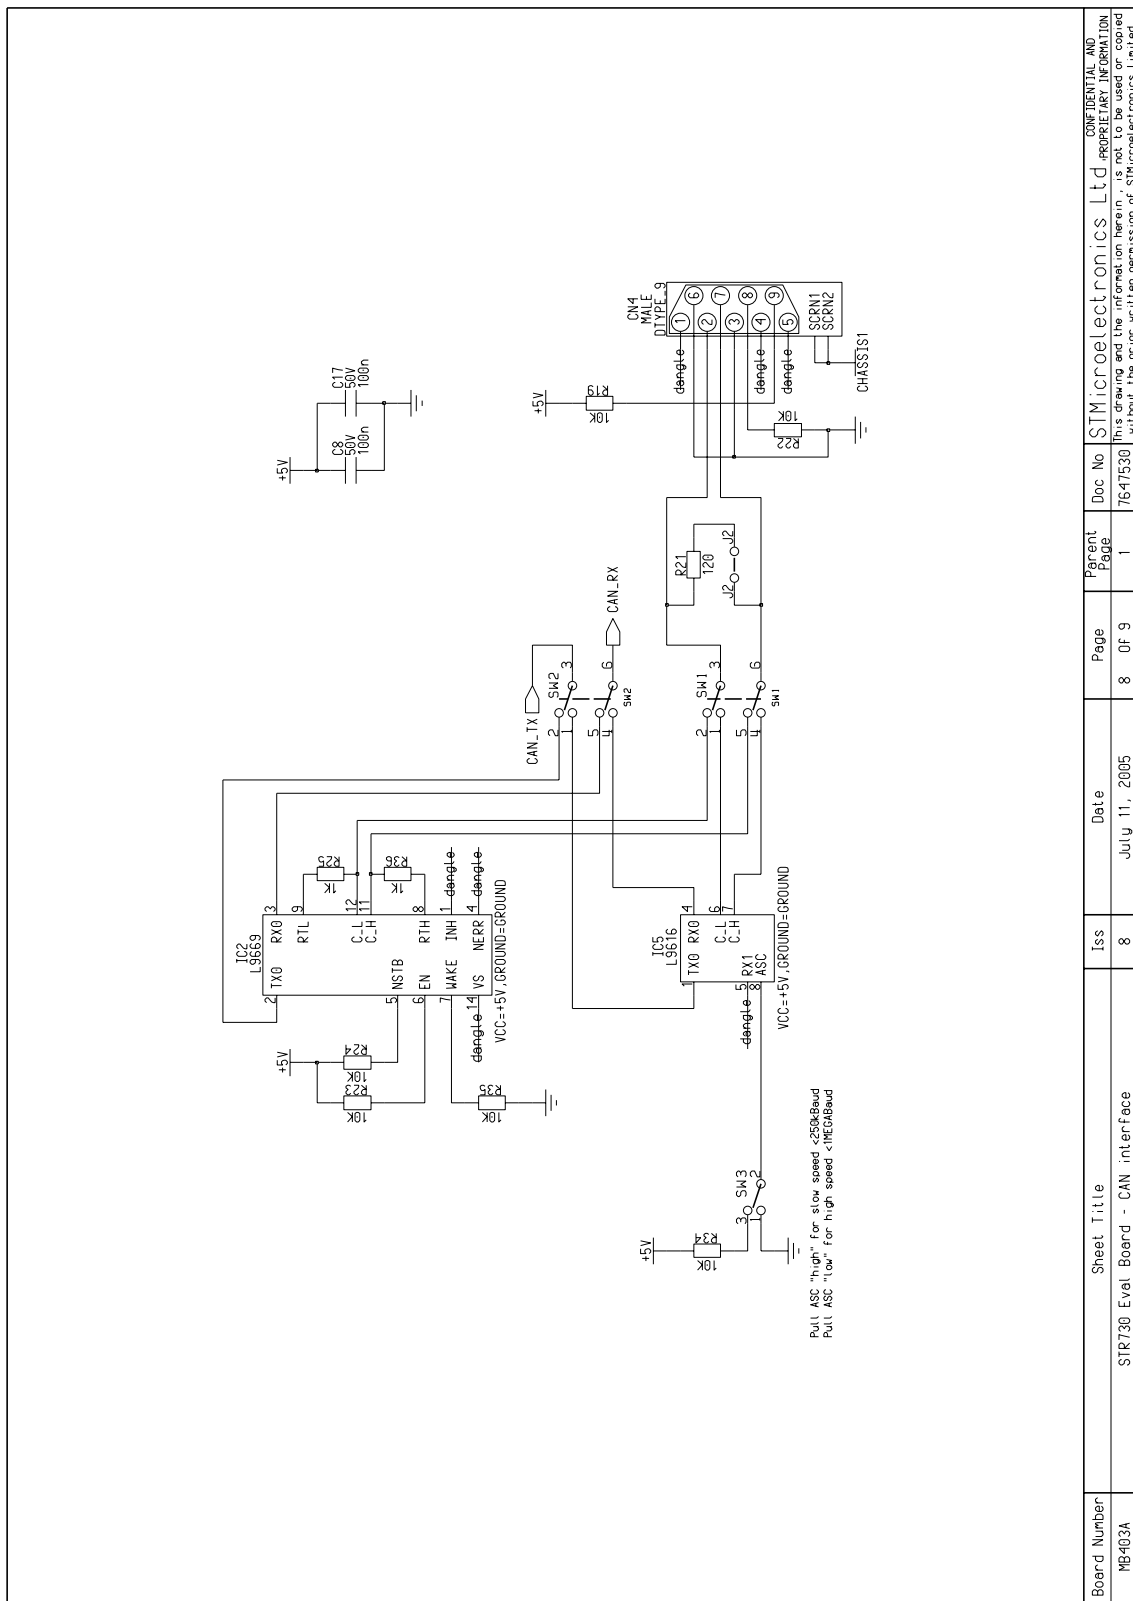


Figure 18. I2C EEPROM interface

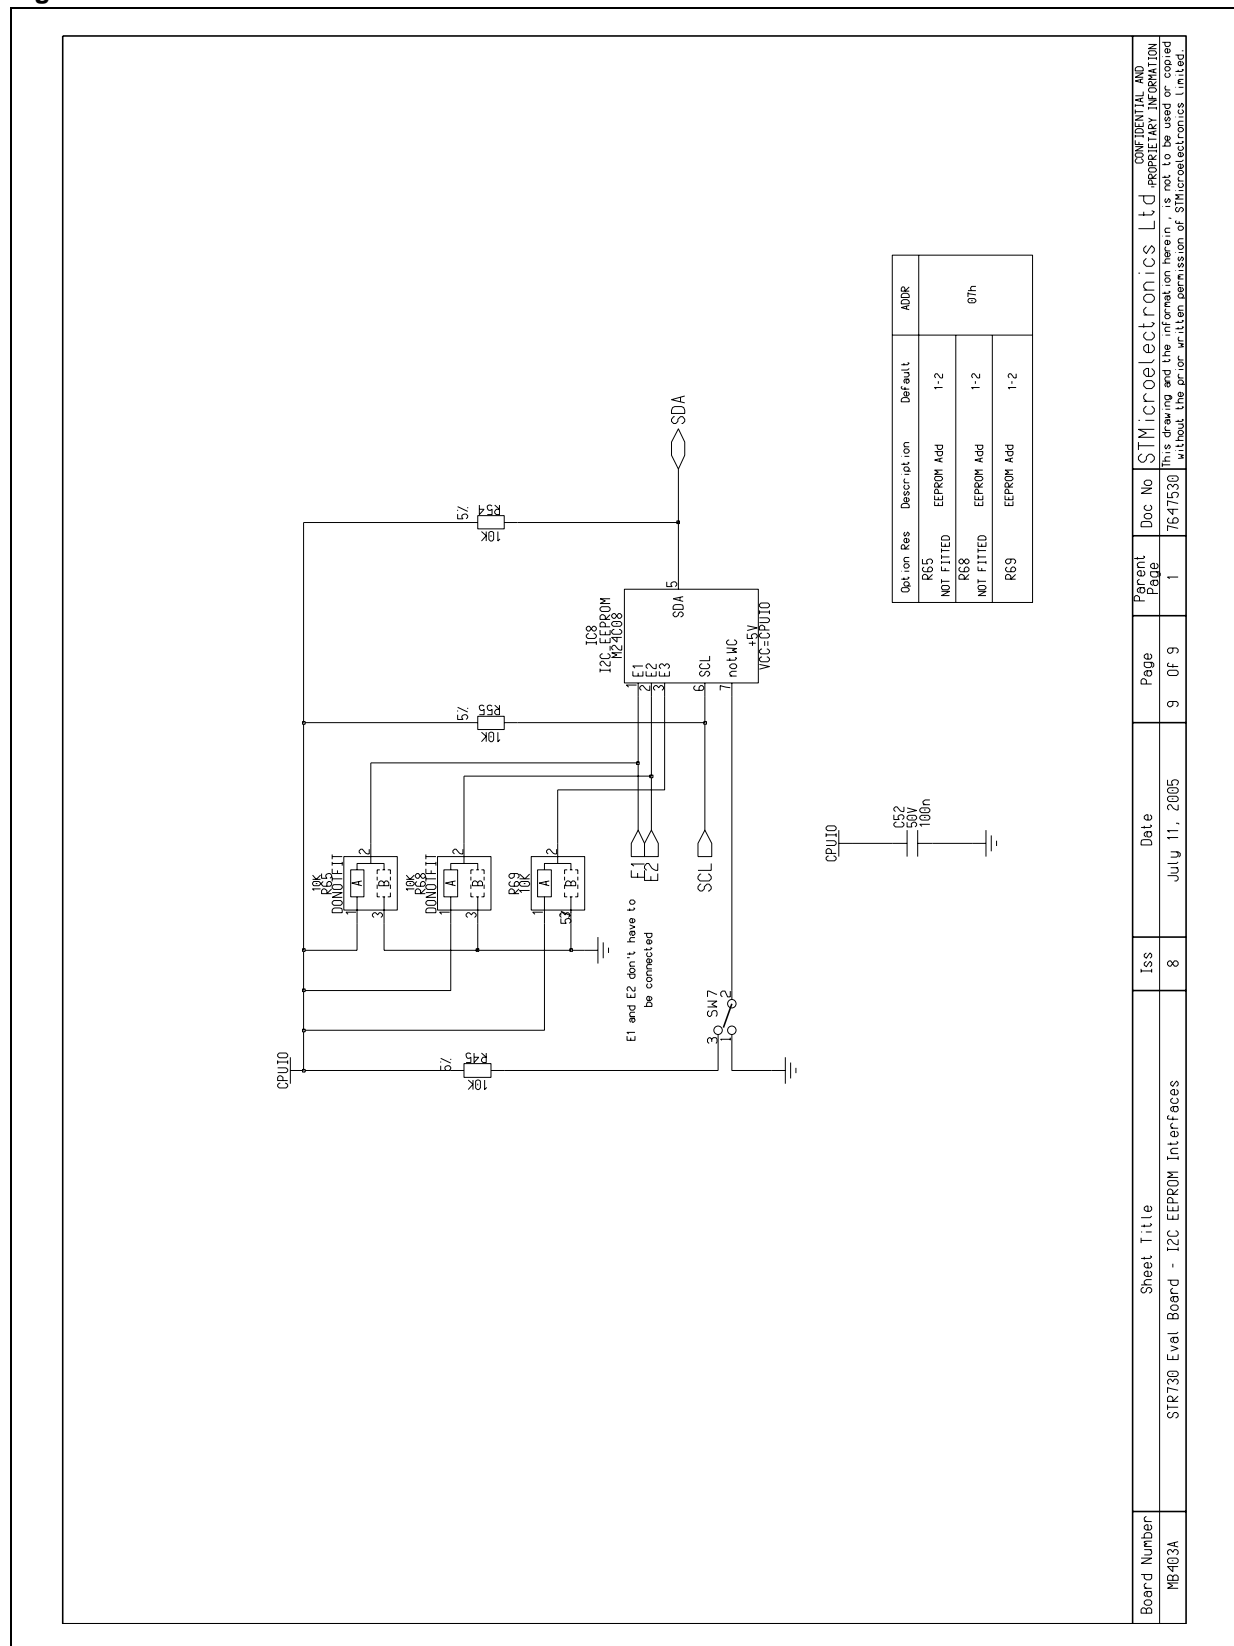

5 Revision history

Table 10. Document revision history

Date	Revision	Changes
26-Jun-2008	1	Initial release.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2008 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com