

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [62201-8645](#)
Status: **Active**
Description: Daughter Card Module Installation Press-In Tool

Documents:
[RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	Application Tooling
Series	T3002
Comments	See Tooling Specification (PDF) Above
Function	Insertion
Geographic Area	Global
Level of Automation	Manual
More Detailed Tech Information	applicationtooling@molex.com
Product Name	Impact™
Survey	www.molex.com//review/apptool_survey.html
Tool Type	Handtool
UPC	800756963730

Material Info

Reference - Drawing Numbers

Application Tooling Documents ATS-622018645, TM-622018799

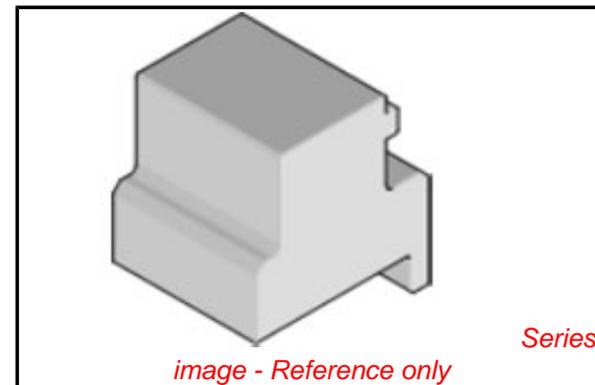


image - Reference only

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[T3002Series](#)

Use With

Impact™ Daughtercard Signal Module,
[76160 Series](#)

Application Tooling | FAQ

Description	Product #
Impact™ 100 Ohm 4 Pair RAM Right Angle Header, 1.90 by 1.35mm Pitch, Unguided, Left Endwall, 16 Columns, 192 Circuits, Pin Length 5.50mm, Plated Through Hole Dimension 0.39mm, Lead-Free	0765001618
Impact™ 100 Ohm 4 Pair Right Angle Daughtercard Receptacle, 1.90 by	0761605016

1.35mm Pitch, Right
Guided, 16 Columns,
192 Circuits, Plated
Through Hole
Dimension 0.46mm,
Lead-Free
Impact™ 100 Ohm 0761605026
4 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Right
Guided, 16 Columns,
192 Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0761603026
4 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Left
Guided, 16 Columns,
192 Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0761601026
4 Pair Right Angle
Daughtercard
Receptacle, 1.90
by 1.35mm Pitch,
Unguided, 16
Columns, 192
Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0765001628
4 Pair RAM Right
Angle Header,
1.90 by 1.35mm
Pitch, Unguided,
Dual Endwall, 16
Columns, 192
Circuits, Pin Length
5.50mm, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0761601016
4 Pair Right Angle
Daughtercard
Receptacle, 1.90
by 1.35mm Pitch,
Unguided, 16
Columns, 192
Circuits, Plated
Through Hole
Dimension 0.46mm,
Lead-Free
Impact™ 100 Ohm 0765001627
4 Pair RAM Right
Angle Header,
1.90 by 1.35mm
Pitch, Unguided,

Dual Endwall, 16
Columns, 192
Circuits, Pin Length
4.90mm, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0761603016
4 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Left
Guided, 16 Columns,
192 Circuits, Plated
Through Hole
Dimension 0.46mm,
Lead-Free
Impact™ 100 Ohm 0761603126
4 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Left
Guided, 16 Columns,
192 Circuits, Plated
Through Hole
Dimension 0.39mm,
Keying Orientation A,
Lead-Free
Impact™ 100 Ohm 0761605126
4 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Right
Guided, 16 Columns,
192 Circuits, Plated
Through Hole
Dimension 0.39mm ,
Key Orientation A,
Lead-Free, Keying
Orientation A
Impact™ 100 Ohm 0765001607
4 Pair RAM Right
Angle Header,
1.90 by 1.35mm
Pitch, Unguided,
Open Endwall,
16 Columns, 192
Circuits, Pin Length
4.90mm, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0765001608
4 Pair RAM Right
Angle Header,
1.90 by 1.35mm
Pitch, Unguided,
Open Endwall,
16 Columns, 192
Circuits, Pin Length
5.50mm, Plated
Through Hole
Dimension 0.39mm,
Lead-Free

Impact™ 100 Ohm 0765001617
4 Pair RAM Right
Angle Header,
1.90 by 1.35mm
Pitch, Unguided,
Left Endwall, 16
Columns, 192
Circuits, Pin Length
4.90mm, Plated
Through Hole
Dimension 0.39mm,
Lead-Free

Impact™ 100 Ohm 0765003607
4 Pair RAM Right
Angle Header,
1.90 by 1.35mm
Pitch, Left Guided,
Open Endwall,
16 Columns, 192
Circuits, Pin Length
4.90mm, Plated
Through Hole
Dimension 0.39mm,
Lead-Free

Impact™ 100 Ohm 0765003608
4 Pair RAM Right
Angle Header,
1.90 by 1.35mm
Pitch, Left Guided,
Open Endwall,
16 Columns, 192
Circuits, Pin Length
5.50mm, Plated
Through Hole
Dimension 0.39mm,
Lead-Free

Impact™ 100 Ohm 0765005607
4 Pair RAM Right
Angle Header,
1.90 by 1.35mm
Pitch, Right Guided,
Open Endwall,
16 Columns, 192
Circuits, Pin Length
4.90mm, Plated
Through Hole
Dimension 0.39mm,
Lead-Free

Impact™ 100 Ohm 0765005608
4 Pair RAM Right
Angle Header,
1.90 by 1.35mm
Pitch, Right Guided,
Open Endwall,
16 Columns, 192
Circuits, Pin Length
5.50mm, Plated
Through Hole
Dimension 0.39mm,
Lead-Free

Impact™ 100 Ohm 0765005618
4 Pair RAM Right
Angle Header,
1.90 by 1.35mm
Pitch, Right Guided,

Open Endwall,
16 Columns, 192
Circuits, Pin Length
5.50mm, Plated
Through Hole
Dimension 0.39mm ,
Key Orientation A,
Lead-Free
Impact™ 100 Ohm 0765007607
4 Pair RAM Right
Angle Header,
1.90 by 1.35mm
Pitch, Left Guided,
Open Endwall,
16 Columns, 192
Circuits, Pin Length
4.90mm, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0765007608
4 Pair RAM Right
Angle Header,
1.90 by 1.35mm
Pitch, Left Guided,
Open Endwall,
16 Columns, 192
Circuits, Pin Length
5.50mm, Plated
Through Hole
Dimension 0.39mm,
Lead-Free

This document was generated on 04/03/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION