


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
-	CLASS A RELEASED	2/11/00	
A	CONFIGURATION CHANGE; ADDRESS	7/9/03	

- DO-IT-YOURSELF (DIY) Ø4mm SHEATH BANANA PLUG, SCREW ATTACHMENT
- SPECIFICATIONS:
 INSULATOR BODY: POLYPROPYLENE
 PLUG BODY: BRASS, NICKEL PLATED
 CONTACT SPRING: BECU, NICKEL PLATED
- RATING:
 VOLTAGE: 1000V CATIII P2 (per INSTRUCTIONS)
 REINFORCED INSULATION, CE MARK
 CURRENT: 36A MAX.
 INTERNAL RESISTANCE: <10mΩ
 TEMPERATURE: -20° TO +80° C.
- MAXIMUM WIRE SIZES:
 CONDUCTOR: Ø.090 (12AWG)
 INSULATION: Ø.16 (Ø4.0)
 STRIP LENGTH: .25 (6.4)

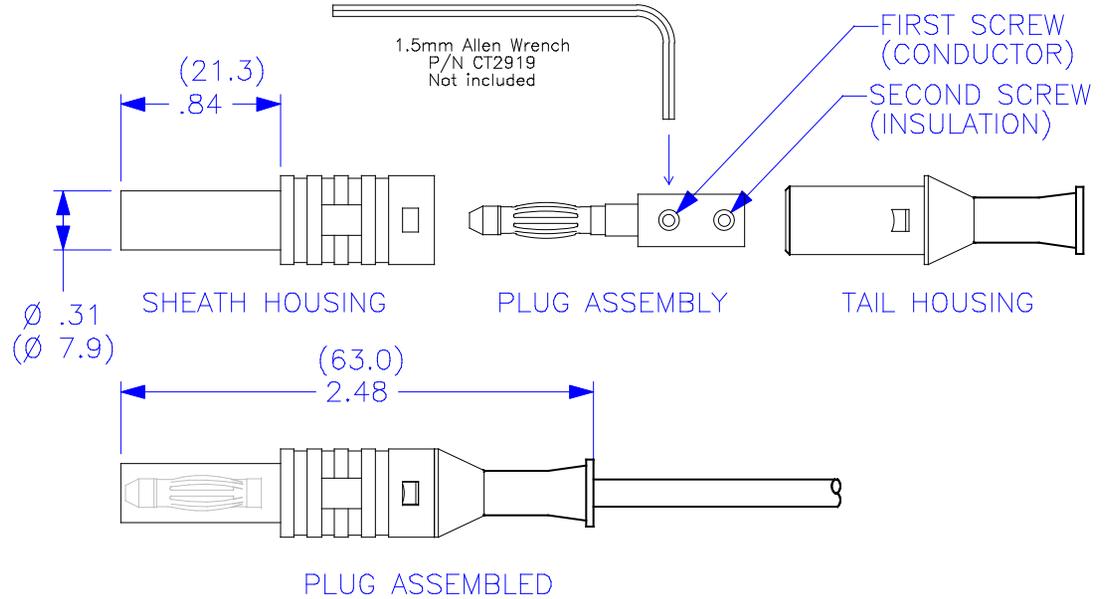

PART NUMBER

CT2989-#

- COLOR:
- 0 - BLACK
 - 2 - RED
 - 4 - YELLOW
 - 5 - GREEN
 - 6 - BLUE
 - 9 - WHITE

Assembly Instructions:

- Slide wire through Tail Housing.
- Strip wire .25" (6.4mm).
- Insert stripped wire into Plug Assembly and tighten First Set-Screw (conductor). Set-Screws use 1.5mm Allen Wrench (Cal Test P/N CT2919).
- Snug Second Set-Screw on wire insulation.
- Push Plug Assembly into Tail Housing.
- Snap Tail Housing assembly into Sheath Housing.

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ± 1/32 .XX ± .02 .XXX ± .005 DO NOT SCALE DRAWING	CONTRACT NO.		Cal Test Electronics		22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610				
			APPROVALS	DATE	TITLE						
		MATERIAL	DRAWN	WDH	2/10/00	DIY SHEATH PLUG, SCREW ATTACHMENT					
		FINISH	CHECKED			SIZE	CAGE CODE	DWG. NO.	P298900	REV.	A
NEXT ASSY	USED ON		ENGR.			A					
APPLICATION			DESIGN ACTIVITY			SCALE	1:1		SHEET 1 OF 1		