### **FEATURES AND SPECIFICATIONS**



## **nolex**® 0.80mm (.031") Pitch **SFP Stacked Multi-Port** Connectors

75310, 75786, 75460, 75787, 75462, 75640, 75759, 75714, 75454, 75450, 75733, 75734, 75477, 75451

### Upgrade to high-speed Ethernet and Fibre Channel ports with Molex's Stacked Multi-Port SFP Connectors


Molex is rapidly expanding its Small Form-factor Pluggable (SFP) product offering to meet the demands of networking and storage industries, which require denser and faster packaging for high-speed serial interfaces. The new SFP Stacked Multi-Port Connectors are the latest additions to Molex's extensive SFP product line.

These new connectors offer high port density with complete integration of stacked 20-circuit SFP connector ports within a cage. Integrated lightpipes are available to provide port-status indication to the user. The product line encompasses connectors offered in two heights and is available in five port configurations: 2-by-1, 2-by-2, 2-by-4, 2-by-5 and 2-by-6.

Molex's SFP Stacked Multi-Port Connectors accept SFP MSA-compliant modules, allowing installers to configure and upgrade high-speed Ethernet and Fibre Channel (FC) ports. Tin/Lead press-fit connector tails are provided as the standard option. Tin-plated tails will also be available to meet lead-free requirements. Contact Molex for additional information.

#### **Features and Benefits**

- High-speed contact design meets 4.25Gbps SFP requirements and is capable of speeds up to 10Gbps
- Connectors are available in multiple port configurations (2, 4, 8, 10 and 12) providing greater port density and reduced PCB assembly labor

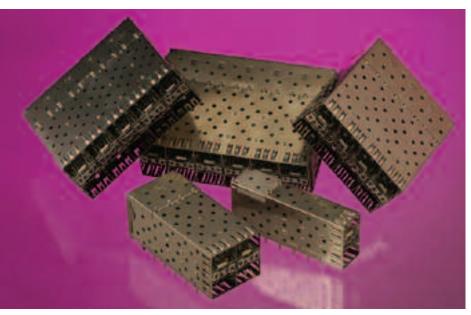

Multi-port connectors with lightpipes

- Integrated lightpipe option, for use with mono or bicolor SMT LED's provides port status and activity feedback
- Modules are oriented "belly-to-belly" when inserted assuring ease of module removal from the port
- Connectors are available in 2 heights: medium 25.50mm (1.000") and tall 29.30mm (1.150"); Medium-height connectors meet industry standard and are consistent with the stacked multi-port modular jack design; Tall-height connector (2-by-1 only) is designed for 1U applications

#### **SPECIFICATIONS**

#### Reference Information

Packaging: Tray UL File No.: E29179 CSA File No.: LR19980

Mates With: SFP MSA-compliant modules

Designed In: Millimeters

#### **Electrical**

Voltage: 120V Current: 0.5A max.

Dielectric Withstanding Voltage: 300V Insulation Resistance: 1 Megohm

## Mechanical

Insertion Force to PCB: 35.59N (8 lb) per compliant pin, max. Mating Force: 40N (8.99 lb) max.

Unmating Force: 11.5N (2.59 lb) max.

Durability: 100 cycles

## **Physical**

Housing: High-temperature plastic, Glass-filled Contact: Tin/Brass (Sn/CuZn)

Platina:

Contact Area — Gold (Au)

Solder Tail Area — Tin/Lead (Sn/Pb) or Tin (Sn)

Underplating — Nickel (Ni) PCB Thickness: 2.36mm (0.093") Operating Temperature: -40 to +85°C

## **APPLICATIONS**




# 0.80mm (.031") Pitch **SFP Stacked Multi-Port Connectors**

■ Networking, Storage and Telecommunication

- Hubs

- Routers - Servers - Switches 75310, 75786, 75460, 75787, 75462, 75640, 75759, 75714, 75454, 75450, 75733, 75734, 75477, 75451

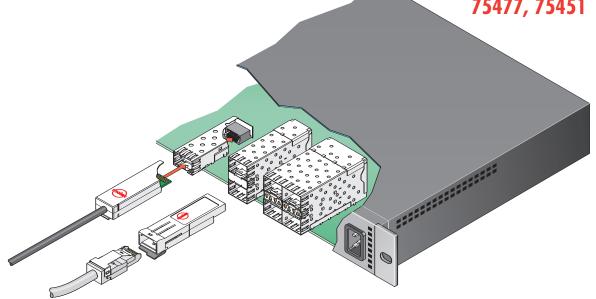

## **ORDERING INFORMATION**

Order No.	Port Configuration	Height	Mounting	Lightpipes	EMI Protection
75310-0001	- 2-by-1	29.30mm (1.150")	Through-hole	- Yes	Gasket with flange
75786-0001			Press-fit		
75460-0001			Through-hole		Gasket with extended flange
75787-0001					
75462-0001		25.50mm (1.000")	Press-fit	No	Spring fingers
75640-0001				Yes	
75759-0001	2-by-2			No	
75714-0001				Yes	
75454-0001	2-by-4			No	
75450-0001				Yes	
75733-0001	2-by-5			No	
75734-0001				Yes	
75477-0001	2-by-6			No	
75451-0001				Yes	

**Americas Headquarters** Lisle, Illinois 60532 U.S.A. 1-800-78MOLEX amerinfo@molex.com

**Far East North Headquarters** Yamato, Kanagawa, Japan 81-462-65-2324 feninfo@molex.com

Far East South Headquarters Jurong, Singapore 65-6-268-6868 fesinfo@molex.com

**European Headquarters** Munich, Germany 49-89-413092-0 eurinfo@molex.com

**Corporate Headquarters** 2222 Wellington Ct. Lisle, IL 60532 U.S.A. 630-969-4550 Fax:630-969-1352