

SUMMARY

Wires

Low	67
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Series	1R
Termination type	Male crimp
IP rating	50
Cable Ø	0.00 - 0.00 mm
Matching parts	
Status	
Alternative part	



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FGG*: Straight plug, key (G) or key (A), with cable collet
Keying	
Housing Material	Crastin® PBT, gray
Cable Fixing	∅ 0 - 0 mm
Variant	

Performance

Configuration	1R.367 : 67 low voltage
Insulator	L: PEEK (UL 94 / V-0/3.2, depends on material thickness)
Rated Current	0.5 Amps

Specifications


Contact Type: Crimp
Test voltage (kV rms) Contact-contact: 0.6

Others

IP Rating: 50

DRAWINGS

Draws

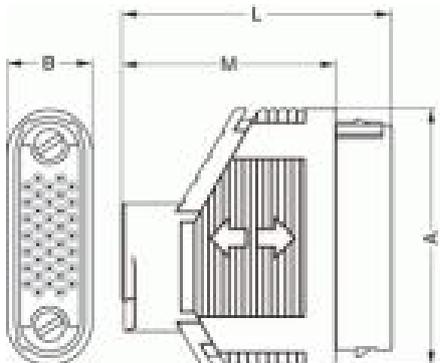

Dimensions

	A	B	L
mm.	24.5	9	31.5
in.	0,96	0,35	1,24

RECOMMENDED BY LEMO

Tools

Crimp Tool: DPC.91.701.V
Positionner: DCE.91.050.BVC
Extractor: DCF.91.050.2LT

Cables