

Electrical Characteristics Data

0402 X7R 100nF 16V(0402B104K160CT)

1. Dimension



| Size Inch (mm) | L (mm) | W (mm) | T (mm) |
|----------------|-----------|-----------|-----------|
| 0402 (1005) | 1.00±0.05 | 0.50±0.05 | 0.50±0.05 |


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @16V, 120sec)

| Item | Spec |
|------------|-----------|
| Cap [nF] | 100(±10%) |
| DF | ≤5% |
| IR [G-ohm] | >5 min |


3. Impedance/ESR-Frequency

(Equipment: 4294A)

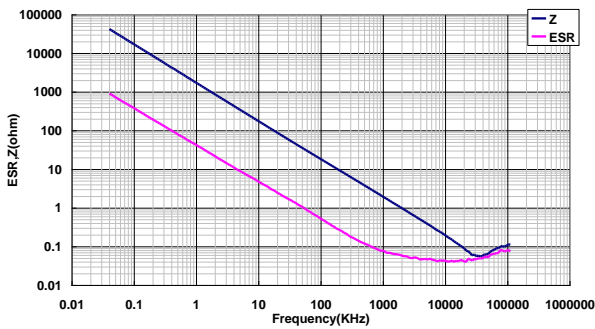

4. Capacitance – Temperature Characteristics


(Equipment: 4284A)

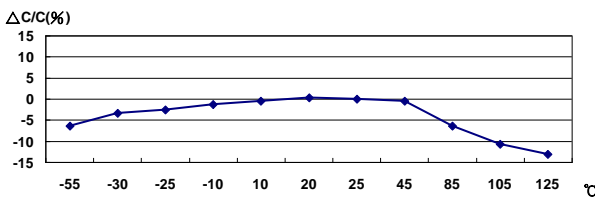

5. Capacitance – DC Voltage Characteristics

(Equipment: 4284A; DC charge 60±5sec)

7.5V : -13.43% ; 16V : -56.52%

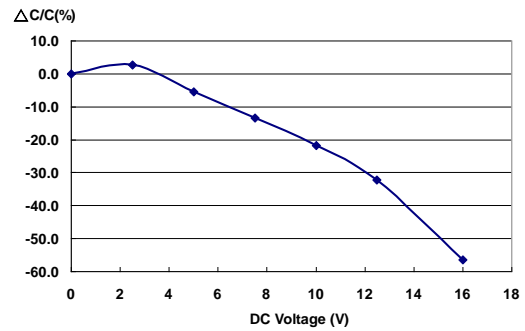

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A; AC charge 60±5sec)

