
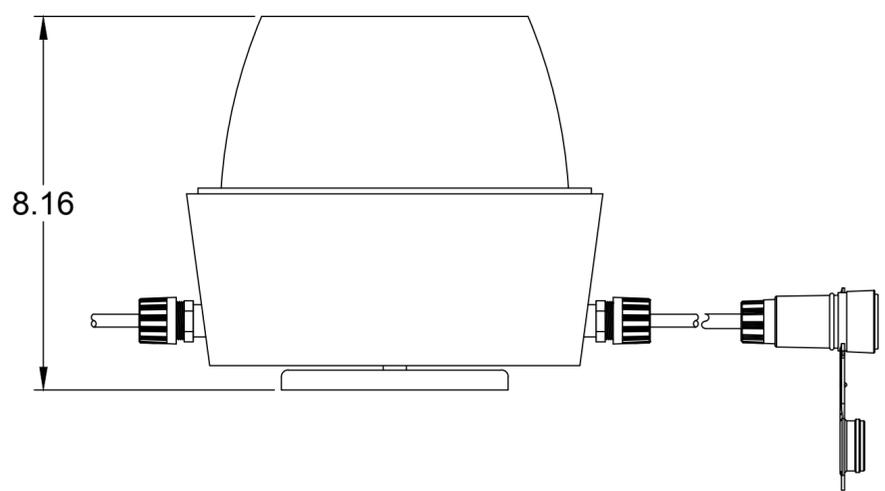


CAUTION: RISK OF ELECTRIC SHOCK. Do not use with extension cord near water or where water may accumulate. Keep lamp at least 16 feet from pools and spas. Keep plugs and receptacles dry. For use only on GFCI protected circuits. Suitable for wet location use

THIS UNIT SHOULD NOT BE PLACED DIRECTLY OVERHEAD OR ON CURVED OR UNEVEN SURFACES. Please use caution when determining placement and mounting surfaces for this device. Improperly mounted unit may fall (SEE OPERATING INSTRUCTIONS)

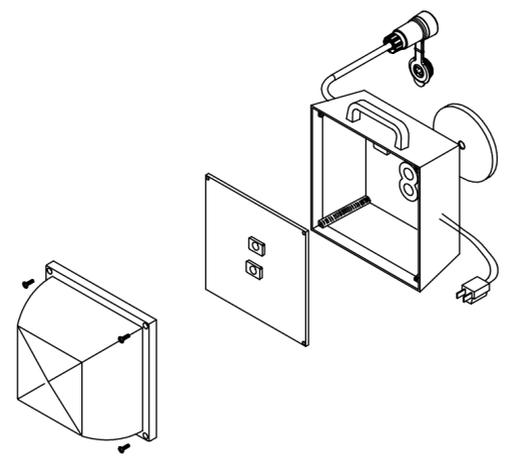

| MATERIAL NO. | CATALOG NO. | DESCRIPTION | HOUSING COLOR | CORD, PLUG & CONNECTOR COLOR |
|--------------|-------------|----------------------------------|---------------|------------------------------|
| 1301100060 | 8565-LED | PORTABLE WORKLIGHT-LED | ORANGE | BLACK |
| 1301100061 | 8565F-LED | PORTABLE WORKLIGHT-LED-FEED THRU | ORANGE | BLACK |
| | | | | |

- NOTES:**
1. FINISH: POWDER PAINT AS APPROVED BY WOODHEAD.
 2. TEMPERATURE LIMITS:
OPERATING: -20 C TO +40 C
NON-OPERATING: -40 C TO +40 C.
 3. cULus LISTED, E174254
 4. FIXTURE RATING: .52A, 45W
 5. FEED THROUGH RATING: 11A MAX
 6. MATERIALS:
HOUSING-CAST ALUMINUM
LENS-POLYCARBONATE, WATER CLEAR, .125"
DRIVER-ELECTRONIC, RATED 90 C.
LEDS- (2) CCT: 5000K, CRI: Ra 80min.
LED HOLDER-NYLON PA66 GF
MAGNET-(ALNICO 5) WITH 150 POUNDS PULL FORCE
 7. PRODUCT SPECIFICATION- PS-130110-001

| | | | | | | | | | |
|---|----------------|--|-------------|---------------------------|------------------------|---|---|------------------------|--|
| EC NO: ICG2015-1017 DRWN: PSNAGEL 2014/11/26 CHKD: HKNEELAN 2014/12/05 APPR: BWOODMAN2015/01/30 REV A | QUALITY SYMBOL | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE INCH ONLY | | SCALE NTS | DESIGN UNITS INCH | THIRD ANGLE PROJECTION | |
| | ▽=0 | mm | INCH | DRAWN BY | DATE | TITLE | SD-LED MAGNETLIGHT 8565-LED, 8565F-LED | | |
| | ∇=0 | 4 PLACES ±--- | ±--- | PSNAGEL | 2014/11/26 | | | | |
| | | 3 PLACES ±--- | ±.005 | CHECKED BY | DATE | MOLEX INCORPORATED | | | |
| | 2 PLACES ±0.05 | ±.010 | HKNEELAN | 2014/12/05 | | | | | |
| | 1 PLACE ±0.10 | ±.1 | APPROVED BY | DATE | MATERIAL NO. SEE CHART | | DOCUMENT NO. SD-130110-004 | SHEET NO. 1 OF 1 | |
| | | ANGULAR ±.5° | | BWOODMAN 2015/01/30 | | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | |
| | | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | | | | | | |