


PART NO: DCR Series

M12-A Male Rear Mount PG9 Receptacle

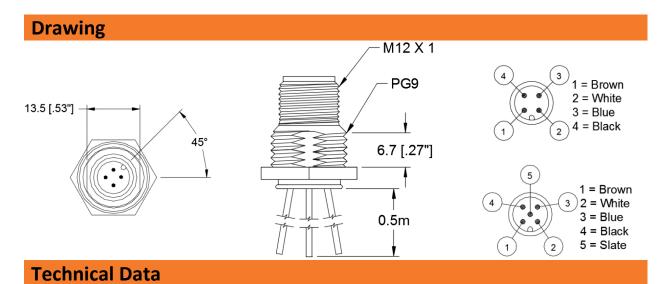

Mechanical

Receptacle Style	M12, Male	
Applicable Specification	IEC 61076-2-101	
Receptacle Threads	External	
Housing	Nickel Plated Brass, Leads Epoxy Potted	
Insert	Nylon	
Contact	Copper Alloy, Gold Plated	
Mounting Orientation	Rear	
Panel Nut	Nickel Plated Brass	
O-Ring	FKM	
Electrical		
Contact Resistance	≤ 5 mΩ	
Nom. Current @ 40°C	4 A	
Rated Voltage	4 Pole 250 V (IEC) 300V (UL)	
	5 Pole 60 V (IEC) 30V (UL)	
UL File	E485156	
Lead Wires		
AWG	22 AWG (7/30) Tinned Copper	
Insulation	PVC	
Outside Diameter	0.062" Nominal	
Lead Length	0.5 Meters (19.7")	
UL Style	AWM 1007 & 1569	
CSA Style	TR64	
Environmental		
Degree of Protection	IP 67/ NEMA 6P	
Operating Temperature	-25C (-13F)/ +90C (+194F)	
Range		



PART NO: DCR Series M12-A Male Rear Mount PG9 Receptacle

CE	All materials used in the manufacture of this part meet the requirements of European Directive 2011/65/EU regarding the restriction of use of certain hazardous substances in electrical and electronic equipment. Exemption used; 6a.		
REACH Regulation (EC 1907/2006)	of Very High Co European Union	This product does not contain Substances of Very High Concern (SVHC) listed on the European Union's REACH candidate list in excess of 0.1% mass of the item.	
Ordering Information	Description	Quantity	
300DCR NC404	4 Pin	Each	
302DCR NC404	5 Pin	Each	

Although Alpha Wire ("Alpha") makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability. Alpha provides the information and specification herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Alpha be liable any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Alpha has been advised of the possibility of such damages, whether in an action under contact, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specification described herein.