

RT-3 Special Sizes Heat-Shrinkable Tubing

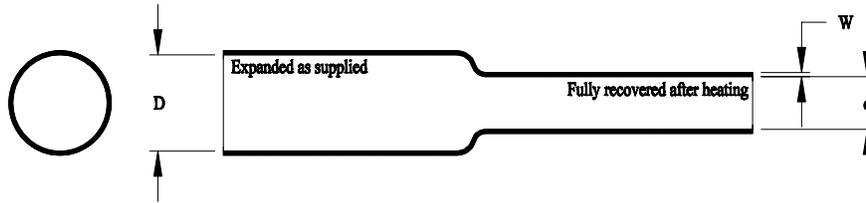


Table 1: Dimensions (inches)

Size	As Supplied	Recovered	
	Inside Diameter (D)	Inside Diameter, maximum (d)	Wall Thickness (W)
No.31	.205 ± .005	.095	.033 ± .003
No.32	.270 ± .008	.125	.033 ± .003
No.50	.280 ± .015	.193	.033 ± .003
No.51	.225 ± .010	.163	.033 ± .003

Longitudinal Change: +0 to -10 Percent

Material: The tubing shall be fabricated from thermally stabilized, flame resistant, modified polyolefin and shall be irradiation cross-linked. It shall be homogeneous and essentially free from flaws, defects, pinholes, bubbles, seams, cracks and inclusions.

Properties: Except as specified above, the finished tubing shall meet the requirements of Raychem Specification RT-360.

@ 2006 Tyco Electronics Corporation. All rights reserved

Specification Control Drawing

tyco <i>Electronics</i>	Tyco Electronics Corporation 305 Constitution Drive Menlo Park, CA 94025 USA		Raychem	Title: RT-3 Special Sizes Heat-Shrinkable Tubing	
	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application			Document No : RT-3_Special_Sizes	
Cage Code: 06090	Scale: None	Size: A	Rev. Date: 30-Oct-2006	Rev.: B	Sheet: 1 of 1

If this document is printed it becomes uncontrolled. Check for the latest revision.