

Notice for TAIYO YUDEN products

Please read this notice before using the TAIYO YUDEN products.

REMINDERS

- Product information in this catalog is as of October 2012. All of the contents specified herein are subject to change without notice due to technical improvements, etc. Therefore, please check for the latest information carefully before practical application or usage of the Products.

Please note that Taiyo Yuden Co., Ltd. shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this catalog or individual specification.

- Please contact Taiyo Yuden Co., Ltd. for further details of product specifications as the individual specification is available.
- Please conduct validation and verification of products in actual condition of mounting and operating environment before commercial shipment of the equipment.

- All electronic components or functional modules listed in this catalog are developed, designed and intended for use in general electronics equipment.(for AV, office automation, household, office supply, information service, telecommunications, (such as mobile phone or PC) etc.). Before incorporating the components or devices into any equipment in the field such as transportation,(automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network (telephone exchange, base station) etc. which may have direct influence to harm or injure a human body, please contact Taiyo Yuden Co., Ltd. for more detail in advance. Do not incorporate the products into any equipment in fields such as aerospace, aviation, nuclear control, submarine system, military, etc. where higher safety and reliability are especially required.

In addition, even electronic components or functional modules that are used for the general electronic equipment, if the equipment or the electric circuit require high safety or reliability function or performances, a sufficient reliability evaluation check for safety shall be performed before commercial shipment and moreover, due consideration to install a protective circuit is strongly recommended at customer's design stage.

- The contents of this catalog are applicable to the products which are purchased from our sales offices or distributors (so called "TAIYO YUDEN' s official sales channel"). It is only applicable to the products purchased from any of TAIYO YUDEN' s official sales channel.

- Please note that Taiyo Yuden Co., Ltd. shall have no responsibility for any controversies or disputes that may occur in connection with a third party's intellectual property rights and other related rights arising from your usage of products in this catalog. Taiyo Yuden Co., Ltd. grants no license for such rights.

- Caution for export

Certain items in this catalog may require specific procedures for export according to "Foreign Exchange and Foreign Trade Control Law" of Japan, "U.S. Export Administration Regulations", and other applicable regulations. Should you have any question or inquiry on this matter, please contact our sales staff.

LEADED COMMON MODE CHOKE COILS FOR AC LINES



WAVE

PARTS NUMBER

T	L	F	1	4	C	B	△	1	0	3	△	0	R	7	K	1
①	②	③	④	⑤	⑥	⑦										

△=Blank space

① Series name

Code	Series name
TLF	Common mode choke
TLH	Hybrid choke

② Dimensions of core

Code	Dimensions of core [mm]
△9	9
10	10
14	14
24	24

③ Shape

Code	Shape
UA△	U core, vertical type
UAH	U core, horizontal type
UB△	U core, vertically split wound
CB△	Square type core vertically split wound
CBH	Square type core horizontally split wound
HB△	Double-square type core vertically split wound
HBH	Double-square type core horizontally split wound

④ Nominal Inductance

Code (example)	Nominal Inductance [μH]
102	1000
103	10000

⑤ Inductance tolerance

Code	Inductance tolerance
△	Nominal Values or higher
W	+100/-10%

⑥ Rated current


Code	Rated current [A]
R54	0.54
0R8	0.8

※R=Decimal point

⑦ Internal code

Code	Internal code
K1	Adhesive fixation


STANDARD EXTERNAL DIMENSIONS / MINIMUM QUANTITY

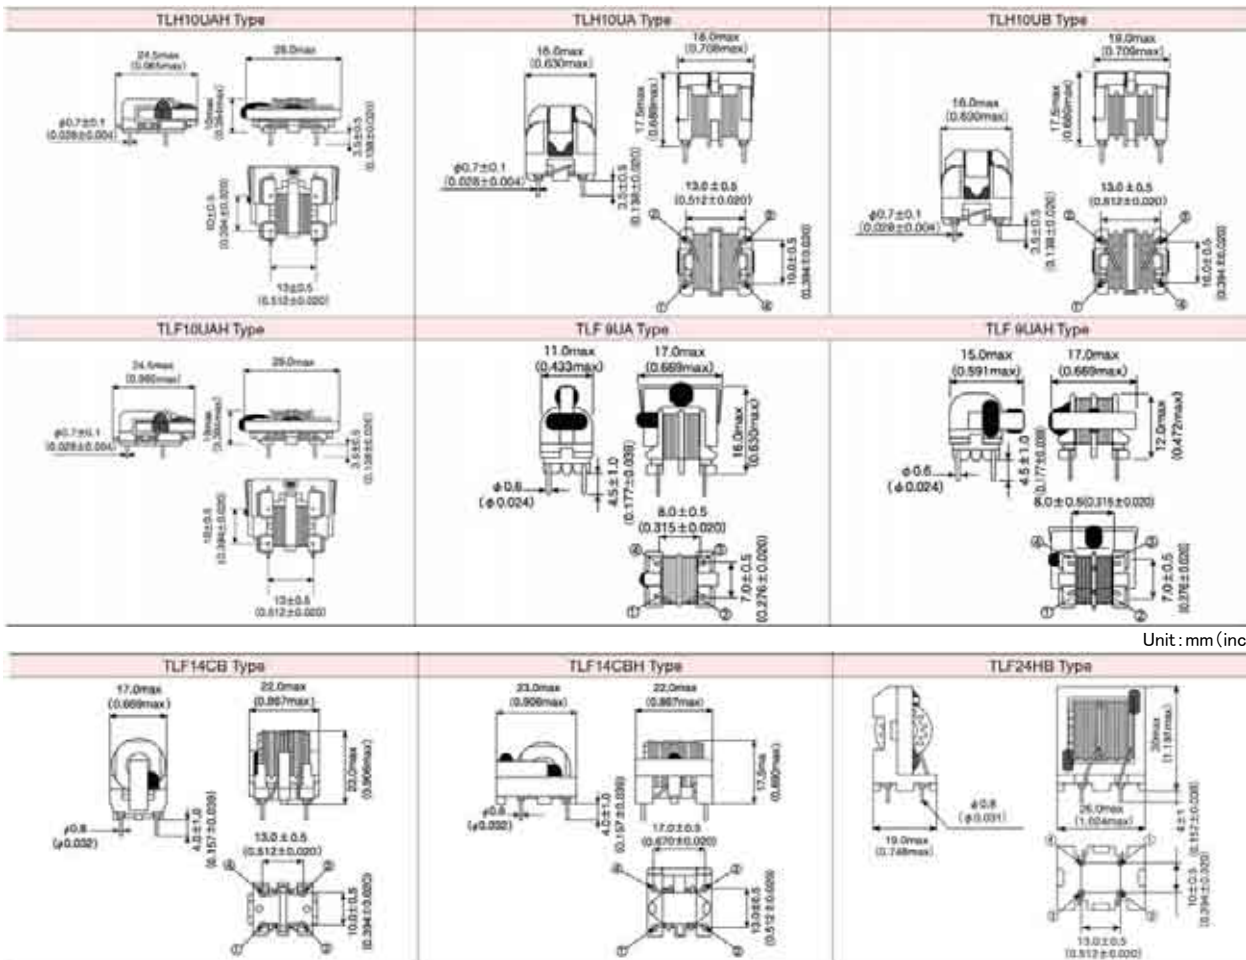

Unit: mm (inch)

Unit: mm (inch)

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

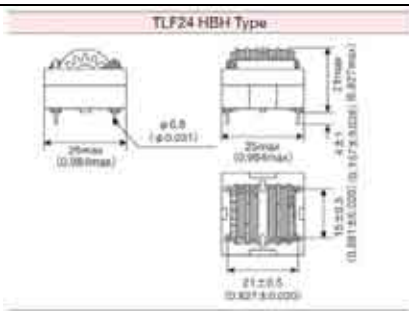

Type	Minimum Quantity (pcs.) Box
TLH Type	500
TLF Type	

■ PARTS NUMBER

● TLH10UAH type (Hybrid choke)

Parts number	EHS	Common mode inductance [mH]	Inductance tolerance	Normal mode inductance [mH] (typ.)	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Rated voltage AC [V] (max.)
TLH10UAH872 0R7	RoHS	8.7	min.	0.70	1.00	0.7	250
TLH10UAH992 0R6	RoHS	9.9	min.	0.85	1.35	0.6	250
TLH10UAH123 0R5	RoHS	12	min.	1.06	1.60	0.5	250

● TLH10UA type (Hybrid choke)

Parts number	EHS	Common mode inductance [mH]	Inductance tolerance	Normal mode inductance [mH] (typ.)	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Rated voltage AC [V] (max.)
TLH10UA 901 2R0	RoHS	0.9	min.	0.067	0.089	2.0	250
TLH10UA 112 1R8	RoHS	1.1	min.	0.087	0.126	1.8	250
TLH10UA 152 1R6	RoHS	1.5	min.	0.126	0.171	1.6	250
TLH10UA 212 1R4	RoHS	2.1	min.	0.160	0.222	1.4	250
TLH10UA 282 1R2	RoHS	2.8	min.	0.215	0.272	1.2	250
TLH10UA 432 1R0	RoHS	4.3	min.	0.330	0.398	1.0	250
TLH10UA 622 0R8	RoHS	6.2	min.	0.430	0.578	0.8	250
TLH10UA 872 0R7	RoHS	8.7	min.	0.644	0.878	0.7	250
TLH10UA 992 0R6	RoHS	9.9	min.	0.836	1.138	0.6	250
TLH10UA 143 0R5	RoHS	14	min.	1.256	1.567	0.5	250

● TLH10UB type (Hybrid choke)

Parts number	EHS	Common mode inductance [mH]	Inductance tolerance	Normal mode inductance [mH] (typ.)	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Rated voltage AC [V] (max.)
TLH10UB 701 2R0	RoHS	0.7	min.	0.056	0.097	2.0	250
TLH10UB 112 1R7	RoHS	1.1	min.	0.068	0.133	1.7	250
TLH10UB 142 1R4	RoHS	1.4	min.	0.113	0.214	1.4	250
TLH10UB 232 1R2	RoHS	2.3	min.	0.150	0.274	1.2	250
TLH10UB 352 1R0	RoHS	3.5	min.	0.232	0.422	1.0	250
TLH10UB 442 0R8	RoHS	4.4	min.	0.328	0.624	0.8	250
TLH10UB 872 0R7	RoHS	8.7	min.	0.580	0.982	0.7	250
TLH10UB 972 0R6	RoHS	9.7	min.	0.735	1.314	0.6	250
TLH10UB 113 0R5	RoHS	11	min.	0.877	1.577	0.5	250

● TLF10UAH type

Parts number	EHS	Common mode inductance [mH]	Inductance tolerance	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Rated voltage AC [V] (max.)
TLF10UAH872 0R7	RoHS	8.7	min.	1.00	0.7	250
TLF10UAH992 0R6	RoHS	9.9	min.	1.35	0.6	250
TLF10UAH123 0R5	RoHS	12	min.	1.60	0.5	250

● TLF 9UA type

Parts number	EHS	Common mode inductance [mH]	Inductance tolerance	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Rated voltage AC [V] (max.)
TLF 9UA 102W0R8K1	RoHS	1.0	+100/-10%	0.5	0.80	250
TLF 9UA 202WR54K1	RoHS	2.0	+100/-10%	1.0	0.54	250
TLF 9UA 302WR42K1	RoHS	3.0	+100/-10%	1.5	0.42	250
TLF 9UA 502WR32K1	RoHS	5.0	+100/-10%	2.5	0.32	250
TLF 9UA 802WR25K1	RoHS	8.0	+100/-10%	4.0	0.25	250
TLF 9UA 103WR23K1	RoHS	10	+100/-10%	4.5	0.23	250

● TLF 9UAH type

Parts number	EHS	Common mode inductance [mH]	Inductance tolerance	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Rated voltage AC [V] (max.)
TLF 9UAH102W0R8K1	RoHS	1.0	+100/-10%	0.5	0.80	250
TLF 9UAH202WR54K1	RoHS	2.0	+100/-10%	1.0	0.54	250
TLF 9UAH302WR42K1	RoHS	3.0	+100/-10%	1.5	0.42	250
TLF 9UAH502WR32K1	RoHS	5.0	+100/-10%	2.5	0.32	250
TLF 9UAH802WR25K1	RoHS	8.0	+100/-10%	4.0	0.25	250
TLF 9UAH103WR23K1	RoHS	10	+100/-10%	4.5	0.23	250

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

■ PARTS NUMBER

● TLF14CB type

Parts number	EHS	Common mode inductance [mH]	Inductance tolerance	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Rated voltage AC [V] (max.)
TLF14CB 102 1R5K1	RoHS	1.0	min.	0.10	1.5	250
TLF14CB 222 1R2K1	RoHS	2.2	min.	0.18	1.2	250
TLF14CB 332 1R0K1	RoHS	3.3	min.	0.32	1.0	250
TLF14CB 472 1R0K1	RoHS	4.7	min.	0.38	1.0	250
TLF14CB 562 0R8K1	RoHS	5.6	min.	0.42	0.8	250
TLF14CB 682 0R8K1	RoHS	6.8	min.	0.60	0.8	250
TLF14CB 103 0R7K1	RoHS	10	min.	0.85	0.7	250
TLF14CB 223 0R4K1	RoHS	22	min.	1.7	0.4	250
TLF14CB 333 0R3K1	RoHS	33	min.	2.7	0.3	250
TLF14CB 473 0R2K1	RoHS	47	min.	3.6	0.2	250
TLF14CB 563 0R2K1	RoHS	56	min.	5.0	0.2	250
TLF14CB 683 0R2K1	RoHS	68	min.	6.5	0.2	250

● TLF14CBH type

Parts number	EHS	Common mode inductance [mH]	Inductance tolerance	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Rated voltage AC [V] (max.)
TLF14CBH102 1R5K1	RoHS	1.0	min.	0.10	1.5	250
TLF14CBH222 1R2K1	RoHS	2.2	min.	0.18	1.2	250
TLF14CBH332 1R0K1	RoHS	3.3	min.	0.32	1.0	250
TLF14CBH472 1R0K1	RoHS	4.7	min.	0.38	1.0	250
TLF14CBH562 0R8K1	RoHS	5.6	min.	0.42	0.8	250
TLF14CBH682 0R8K1	RoHS	6.8	min.	0.60	0.8	250
TLF14CBH103 0R7K1	RoHS	10	min.	0.85	0.7	250
TLF14CBH223 0R4K1	RoHS	22	min.	1.7	0.4	250
TLF14CBH333 0R3K1	RoHS	33	min.	2.7	0.3	250
TLF14CBH473 0R2K1	RoHS	47	min.	3.6	0.2	250
TLF14CBH563 0R2K1	RoHS	56	min.	5.0	0.2	250
TLF14CBH683 0R2K1	RoHS	68	min.	6.5	0.2	250

● TLF24HB type

Parts number	EHS	Common mode inductance [mH]	Inductance tolerance	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Rated voltage AC [V] (max.)
TLF24HB 122 3R0K1	RoHS	1.2	min.	0.045	3.0	250
TLF24HB 222 2R2K1	RoHS	2.2	min.	0.080	2.2	250
TLF24HB 272 2R0K1	RoHS	2.7	min.	0.090	2.0	250
TLF24HB 332 1R8K1	RoHS	3.3	min.	0.120	1.8	250
TLF24HB 392 1R5K1	RoHS	3.9	min.	0.130	1.5	250
TLF24HB 562 1R4K1	RoHS	5.6	min.	0.187	1.4	250
TLF24HB 682 1R2K1	RoHS	6.8	min.	0.254	1.2	250
TLF24HB 822 1R0K1	RoHS	8.2	min.	0.275	1.0	250
TLF24HB 103 1R0K1	RoHS	10	min.	0.345	1.0	250
TLF24HB 123 0R9K1	RoHS	12	min.	0.350	0.9	250
TLF24HB 183 0R8K1	RoHS	18	min.	0.550	0.8	250
TLF24HB 273 0R6K1	RoHS	27	min.	0.880	0.6	250
TLF24HB 333 0R5K1	RoHS	33	min.	1.150	0.5	250

● TLF24HBH type

Parts number	EHS	Common mode inductance [mH]	Inductance tolerance	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Rated voltage AC [V] (max.)
TLF24HBH122 3R0K1	RoHS	1.2	min.	0.045	3.0	250
TLF24HBH222 2R2K1	RoHS	2.2	min.	0.080	2.2	250
TLF24HBH272 2R0K1	RoHS	2.7	min.	0.090	2.0	250
TLF24HBH332 1R8K1	RoHS	3.3	min.	0.120	1.8	250
TLF24HBH392 1R5K1	RoHS	3.9	min.	0.130	1.5	250
TLF24HBH562 1R4K1	RoHS	5.6	min.	0.187	1.4	250
TLF24HBH682 1R2K1	RoHS	6.8	min.	0.254	1.2	250
TLF24HBH822 1R0K1	RoHS	8.2	min.	0.275	1.0	250
TLF24HBH103 1R0K1	RoHS	10	min.	0.345	1.0	250
TLF24HBH123 0R9K1	RoHS	12	min.	0.350	0.9	250
TLF24HBH183 0R8K1	RoHS	18	min.	0.550	0.8	250
TLF24HBH273 0R6K1	RoHS	27	min.	0.880	0.6	250
TLF24HBH333 0R5K1	RoHS	33	min.	1.150	0.5	250

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

LEADED COMMON MODE CHOKE COILS FOR DC AND SIGNAL LINES

LEADED COMMON MODE CHOKE COILS FOR AC LINES

PACKAGING

① Minimum Quantity

● BU Type

Type	Minimum Quantity [pcs]	
	Box	Bulk
BU08RA□□	—	200

● TLH/TLF Type

Type	Minimum Quantity [pcs]	
	Box	
TLH10UA□	500	
TLH10UB		
TLF10UAH		
TLF9UA□		
TLF9UB□		
TLF14CB□		
TLF24HB□		

LEADED COMMON MODE CHOKE COILS FOR DC AND SIGNAL LINES, LEADED COMMON MODE CHOKE COILS FOR AC LINES

RELIABILITY DATA

1. Operating Temperature Range											
Specified Value	BU—RA Type	-25 ~ + 105°C									
	TLH, TLF Type										
Test Method and Remarks	Including temperature rise due to self-generated heat.										
2. Storage temperature range											
Specified Value	BU—RA Type	-40 ~ + 85°C									
	TLH, TLF Type										
3. Rated current											
Specified Value	BU—RA Type	Within the specified range									
	TLH, TLF Type										
Test Method and Remarks	TLH10U, TLF10UAH : The maximum value of AC current within the temperature rise of 60°C TLF9UA, 14CB : The maximum value of AC current within the temperature rise of 45°C TLF9UB : The maximum value of DC current within the temperature rise of 45°C										
4. Inductance											
Specified Value	BU—RA Type	Within the specified tolerance									
	TLH, TLF Type										
Test Method and Remarks	TLF9U : Measuring equipment : Impedance analyzer (HP4192A) or its equivalent Measuring frequency : 1kHz Measuring voltage : 0.35Vosc TLH, TLF (except TLF9U) : Measuring equipment : LCR meter 4284A or its equivalent Measuring frequency : 1kHz Measuring voltage : 1.0V										
5. DC resistance											
Specified Value	BU—RA Type	Within the specified tolerance									
	TLH, TLF Type										
Test Method and Remarks	TLH, TLF : Measuring equipment : DC ohmmeter										
6. Terminal strength tensile force											
Specified Value	BU—RA Type	No abnormality									
	TLH, TLF Type										
Test Method and Remarks	TLF9U : Apply the stated tensile force gradually in the direction to draw terminal.										
	<table border="1"> <thead> <tr> <th>Nominal wire diameter tensile</th> <th>ϕ d [mm]</th> <th>force [N]</th> <th>duration [s]</th> </tr> </thead> <tbody> <tr> <td>ϕ 0.6</td> <td></td> <td>5</td> <td>30 ± 5</td> </tr> </tbody> </table>			Nominal wire diameter tensile	ϕ d [mm]	force [N]	duration [s]	ϕ 0.6		5	30 ± 5
	Nominal wire diameter tensile	ϕ d [mm]	force [N]	duration [s]							
	ϕ 0.6		5	30 ± 5							
TLH, TLF (except TLF9U): Apply the stated tensile force gradually in the direction to draw terminal.											
<table border="1"> <thead> <tr> <th>Nominal wire diameter tensile</th> <th>ϕ d [mm]</th> <th>force [N]</th> <th>duration [s]</th> </tr> </thead> <tbody> <tr> <td>ϕ 0.8</td> <td></td> <td>10</td> <td>30 ± 5</td> </tr> </tbody> </table>			Nominal wire diameter tensile	ϕ d [mm]	force [N]	duration [s]	ϕ 0.8		10	30 ± 5	
Nominal wire diameter tensile	ϕ d [mm]	force [N]	duration [s]								
ϕ 0.8		10	30 ± 5								

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

7. Insulation resistance between wires		
Specified Value	BU—RA Type	100M Ω min.
	TLH, TLF Type	
Test Method and Remarks	TLH, TLF : Applied voltage : Rated voltage (BU—RA, : 500VDC (TLH, TLF (except TLF9UB)) : 250VDC (TLF9UB) Duration : 60sec.	
8. Insulation resistance between wire and core		
Specified Value	BU—RA Type	100M Ω min.(except TLH, TLF10UAH Type)
	TLH, TLF Type	
Test Method and Remarks	TLF : Applied voltage : 500VDC (TLF (except TLF9UB)) : 250VDC (TLF9UB) Duration : 60 sec.	
9. Withstanding : between wires		
Specified Value	BU—RA Type	No abnormality
	TLH, TLF Type	
Test Method and Remarks	TLH, TLF : Applied voltage : 250VDC (BU—RA) : 2000VAC (TLH, TLF (except TLF9UB)) : 500VDC (TLF9UB) Duration : 60sec.	
10. Withstanding : between wires and core		
Specified Value	BU—RA Type	No abnormality (except TLH, TLF10UAH Type)
	TLH, TLF Type	
Test Method and Remarks	TLF : Applied voltage : 2000VAC (TLF (except TLF9UB)) : 500VDC (TLF9UB) Duration : 60sec.	
11. Rated voltage		
Specified Value	BU—RA Type	Within the specified range
	TLH, TLF Type	
Test Method and Remarks	TLH, TLF (except TLF9UB) : 250VAC TLF9UB : 50VDC	
12. Resistance to vibration		
Specified Value	BU—RA Type	TLF9U : Inductance change : Within $\pm 5\%$ TLH, TLF (except TLF9U) : Within the specified range
	TLH, TLF Type	
Test Method and Remarks	TLH, TLF : According to JIS C 0040 Direction : 2hrs each in X, Y and Z direction Total : 6hrs Frequency range : 10 to 55 to 10Hz (1 min.) Amplitude : 1.5mm (shall not exceed acceleration 196m/s ²) Mounting method : soldering onto PC board Recovery : At least 1hr of recovery under the standard condition after the removal from test chamber, followed by the measurement within 2hrs. (TLH, TLF)	
13. Solderability		
Specified Value	BU—RA Type	At least 75% of terminal electrode is covered by new solder.
	TLH, TLF Type	Solder shall be uniformly adhered onto immersed surfaces.
Test Method and Remarks	TLH, TLF : Solder temperature : 245 \pm 5 $^{\circ}$ C Duration : 4 \pm 1sec. Immersion depth : Up to 1.0 to 1.5mm from PBC mounted level.	

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

14. Resistance to soldering heat		
Specified Value	BU—RA Type	Appearance : No abnormality Inductance change : Refer to individual specification
	TLH, TLF Type	TLF9UA : Inductance change : Within $\pm 5\%$ TLF14CB : Within the specified range
Test Method and Remarks	TLH, TLF : Solder temperature : $260 \pm 5^\circ\text{C}$ Duration : $10 \pm 1\text{sec.}$ Immersion depth : Up to 1.0 to 1.5mm from PBC mounted level. Recovery : At least 1hr of recovery under the standard condition after the removal from test chamber, followed by the measurement within 2hrs.	

15. Thermal shock																
Specified Value	BU—RA Type	Appearance : No abnormality Inductance change : Refer to individual specification														
	TLH, TLF Type	TLF9UA : Inductance change : Within $\pm 15\%$ TLH, TLF (except TLF9UA) : Withstanding voltage : No abnormality Insulation resistance : No abnormality														
Test Method and Remarks	TLH, TLF : According to JIS C 0025 Conditions for 1 cycle															
	<table border="1"> <thead> <tr> <th>Step</th> <th>Temperature[$^\circ\text{C}$]</th> <th>Duration[min]</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-25 ± 3</td> <td>30 ± 3</td> </tr> <tr> <td>2</td> <td>Room Temperature</td> <td>Within 3</td> </tr> <tr> <td>3</td> <td>$+85 \pm 2$</td> <td>30 ± 3</td> </tr> <tr> <td>4</td> <td>Room Temperature</td> <td>Within 3</td> </tr> </tbody> </table> Number of cycles : 10 Recovery : At least 1hr of recovery under the standard condition after the removal from test chamber, followed by the measurement within 2 hrs.		Step	Temperature[$^\circ\text{C}$]	Duration[min]	1	-25 ± 3	30 ± 3	2	Room Temperature	Within 3	3	$+85 \pm 2$	30 ± 3	4	Room Temperature
Step	Temperature[$^\circ\text{C}$]	Duration[min]														
1	-25 ± 3	30 ± 3														
2	Room Temperature	Within 3														
3	$+85 \pm 2$	30 ± 3														
4	Room Temperature	Within 3														

16. Damp heat		
Specified Value	BU—RA Type	
	TLH, TLF Type	TLF9UA : Inductance change : Within $\pm 15\%$ TLH, TLF (except TLF9UA) : Withstanding voltage : No abnormality Insulation resistance : No abnormality
Test Method and Remarks	TLH, TLF : Temperature : $60 \pm 2^\circ\text{C}$: $40 \pm 2^\circ\text{C}$ (※TLF14CB) Humidity : $90 \sim 95\%RH$ Duration : 500 hrs Recovery : At least 1hr of recovery under the standard removal from test chamber followed by the measurement within 2 hrs.	

17. Loading under damp heat					
Specified Value	BU—RA Type	Appearance : No abnormality Inductance change : Refer to individual specification			
	TLH, TLF Type	Withstanding voltage : No abnormality Insulation resistance : No abnormality			
Test Method and Remarks	TLH, TLF : Temperature : $60 \pm 2^\circ\text{C}$: $40 \pm 2^\circ\text{C}$ (※TLF14CB) Humidity : $90 \sim 95\%RH$ Duration : 100 hrs : 500 hrs Apply rated current across windings (※TLF14CB) Applied voltage : Apply the following specified voltage between windings.				
	<table border="1"> <tbody> <tr> <td>TLF9UA</td> <td>250VAC</td> </tr> <tr> <td>TLF9UB</td> <td>50VDC</td> </tr> </tbody> </table> Recovery : At least 1hr of recovery under the standard removal from test chamber followed by the measurement within 2 hrs.		TLF9UA	250VAC	TLF9UB
TLF9UA	250VAC				
TLF9UB	50VDC				

18. Low temperature life test		
Specified Value	BU—RA Type	Appearance : No abnormality Inductance change : Refer to individual specification
	TLH, TLF Type	TLF9U : Inductance change : Within $\pm 15\%$ TLH, TLF (except TLF9U) : Withstanding voltage : No abnormality Insulation resistance : No abnormality
Test Method and Remarks	TLH, TLF : Temperature : $-25 \pm 2^\circ\text{C}$: $-40 \pm 2^\circ\text{C}$ (※TLF14CB) Duration : 500 hrs Recovery : At least 1hr of recovery under the standard removal from test chamber followed by the measurement within 2 hrs.	

19. High Temperature life test		
Specified Value	BU—RA Type	Appearance : No abnormality Inductance change : Refer to individual specification
	TLH, TLF Type	TLF9U : Inductance change : Within $\pm 15\%$ TLH, TLF (except TLF9U) : Withstanding voltage : No abnormality Insulation resistance : No abnormality
Test Method and Remarks	TLH, TLF : Temperature : $85 \pm 2^\circ\text{C}$: $105 \pm 3^\circ\text{C}$ (※TLF14CB) Duration : 500 hrs Recovery : At least 1hr of recovery under the standard removal from test chamber followed by the measurement within 2 hrs.	

LEADED COMMON MODE CHOKE COILS FOR DC AND SIGNAL LINES, LEADED COMMON MODE CHOKE COILS FOR AC LINES

■ PRECAUTIONS

1. Circuit Design	
Precautions	<ul style="list-style-type: none"> ◆Operating environment <ol style="list-style-type: none"> 1. The products described in this specification are intended for use in general electronic equipment, (office supply equipment, telecommunications systems, measuring equipment, and household equipment). They are not intended for use in mission-critical equipment or systems requiring special quality and high reliability (traffic systems, safety equipment, aerospace systems, nuclear control systems and medical equipment including life-support systems) where product failure might result in loss of life, injury or damage. For such uses, contact TAIYO YUDEN Sales Department in advance.
2. PCB Design	
Precautions	<ul style="list-style-type: none"> ◆Design <ol style="list-style-type: none"> 1. Please design insertion pitches as matching to that of leads of the component on PCBs.
Technical considerations	<ul style="list-style-type: none"> ◆Design <ol style="list-style-type: none"> 1. When Inductors are mounted onto a PC board, hole dimensions on the board should match the lead pitch of the component, if not, it will cause breakage of the terminals or cracking of terminal roots covered with resin as excess stress travels through the terminal legs.
3. Soldering	
Precautions	<ul style="list-style-type: none"> ◆Wave soldering <ol style="list-style-type: none"> 1. Please refer to the specifications in the catalog for a wave soldering. 2. Do not immerse the entire inductor in the flux during the soldering operation. ◆Lead free soldering <ol style="list-style-type: none"> 1. When using products with lead free soldering, we request to use them after confirming of adhesion, temperature of resistance to soldering heat, etc. sufficiently. ◆Recommended conditions for using a soldering iron <ul style="list-style-type: none"> • Put the soldering iron on the land-pattern. • Soldering iron's temperature – Below 350°C • Duration – 3 seconds or less • The soldering iron should not directly touch the product.
Technical considerations	<ul style="list-style-type: none"> ◆Lead free soldering <ol style="list-style-type: none"> 1. If products are used beyond the range of the recommended conditions, heat stresses may deform the products, and consequently degrade the reliability of the products. ◆Recommended conditions for using a soldering iron <p>If products are used beyond the range of the recommended conditions, heat stresses may deform the products, and consequently degrade the reliability of the products.</p>
4. Cleaning	
Precautions	<ul style="list-style-type: none"> ◆Cleaning conditions <ol style="list-style-type: none"> 1. TLF type <p>Please contact any of our offices for about a cleaning.</p>
5. Handling	
Precautions	<ul style="list-style-type: none"> ◆Handling <ol style="list-style-type: none"> 1. Keep the product away from all magnets and magnetic objects. ◆Mechanical considerations <ol style="list-style-type: none"> 1. Please do not give the product any excessive mechanical shocks. 2. TLF type <p>Please do not add any shock or power to a product in transportation.</p> ◆Packing <ol style="list-style-type: none"> 1. Please do not give the product any excessive mechanical shocks. <p>In loading, please pay attention to handling indication mentioned in a packing box (a loading direction / number of maximum loading / fragile item).</p>
Technical considerations	<ul style="list-style-type: none"> ◆Handling <ol style="list-style-type: none"> 1. There is a case that a characteristic varies with magnetic influence. ◆Mechanical considerations <ol style="list-style-type: none"> 1. There is a case to be damaged by a mechanical shock. 2. TLF type <p>There is a case to be broken by a fall.</p> ◆Packing <ol style="list-style-type: none"> 1. There is a case that a lead route turns at by a fall or an excessive shock.

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

6. Storage conditions

Precautions	<p>◆Storage</p> <p>1. To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.</p> <ul style="list-style-type: none">• Recommended conditions <p>Ambient temperature : 0~40°C Humidity : Below 70% RH</p> <p>The ambient temperature must be kept below 30°C. Even under ideal storage conditions, the solderability of electrodes decreases gradually, so the products should be mounted within one year from the time of delivery.</p> <p>In case of storage over 6 months, solderability shall be checked before actual usage.</p>
Technical considerations	<p>◆Storage</p> <p>1. Under a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/packaging materials may take place.</p>