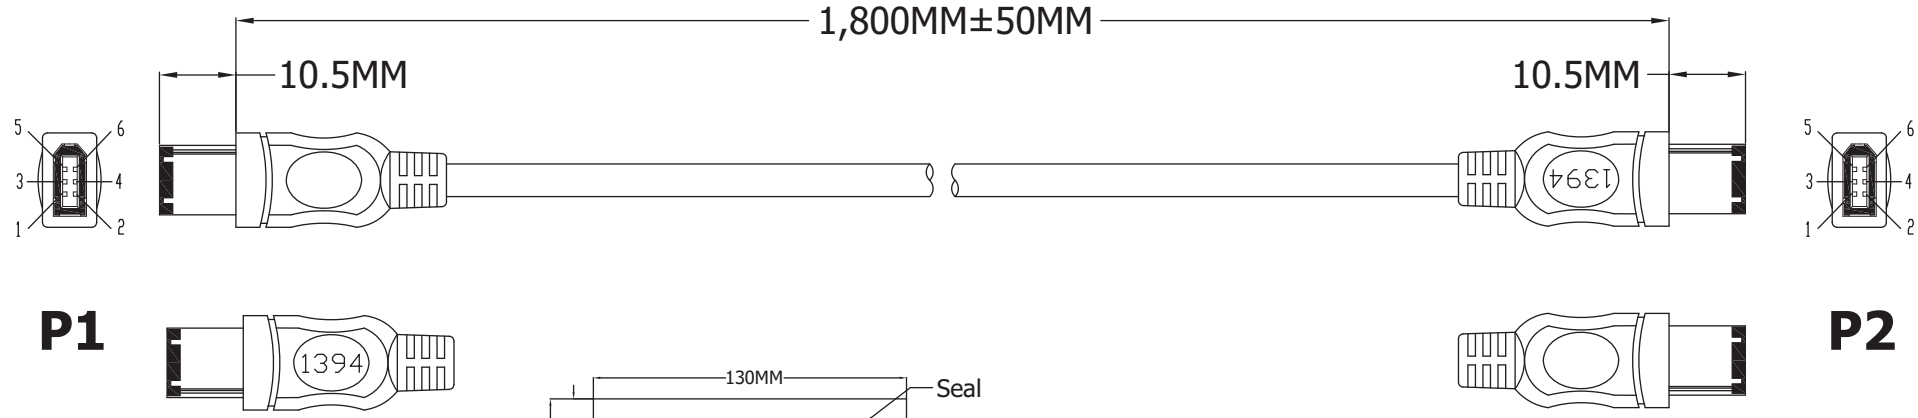

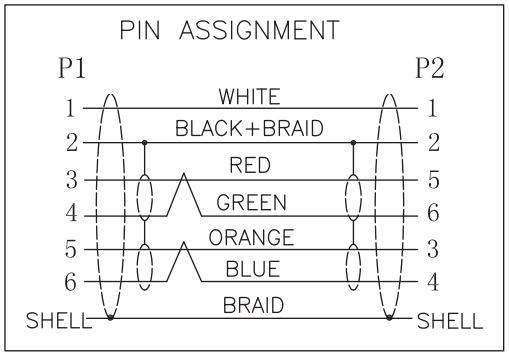

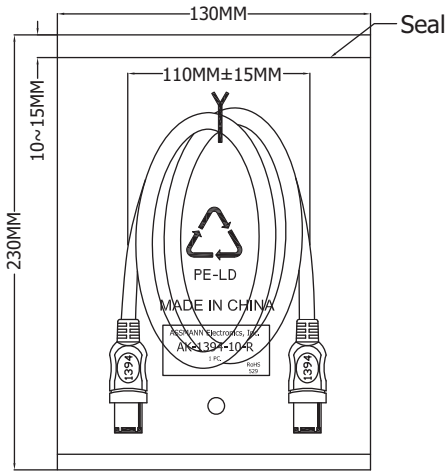

1PCS/PE Bag

Material:

- Cable: UL20276 (28AWG/1P+AL/MY+B)*2C+22AWG*2C+MAB
  - OD 6.0MM
  - Jacket Black
- P1 & P2 Connectors: IEEE 1394 6P Male
  - Pin G/F
  - Insulator Black
  - Shield Nickel plated
- Outer jacket: Black 40P PVC
- Tube: Heat shrink tube black OD1.5*10MM

Electrical:

- 100% short, open, miswire test
- Conduct resistance: 5Ω Max.
- Insulation resistance: 5MΩ Min.
- Dielectric test: 300V DC

Unit: MM

RoHS Complaint

Scale	1:1						Name
TOLERANCE					Drawn	10.19.11	Chappell
X.X	±0.40				Approved		
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
			Modification	Date	Name		

ASSMANN WSW components

Item No.

AK-1394-18-R

Title

IEEE 1394 Cable -6 Pin, Male <=> Male, Black, 1.8 Meters

Drawing No.

rev00

Replace

Sheet