


Tous droits strictement réservés. Reproduction ou communication a des tiers int sous quelque forme que ce soit sans autorisation écrite du propriétaire.  
 Property of BERG ELECTRONICS. Droits de reproduction BERG ELECTRONICS sv



All rights strictly reserved. Reproduction or issue to third parties in any for whatever is not permitted without written authority from the proprietor.  
 Property of BERG ELECTRONICS. Copyright BERG ELECTRONICS sv



PRODUCT NO.  
 10112445-050HAH/050HAHLF

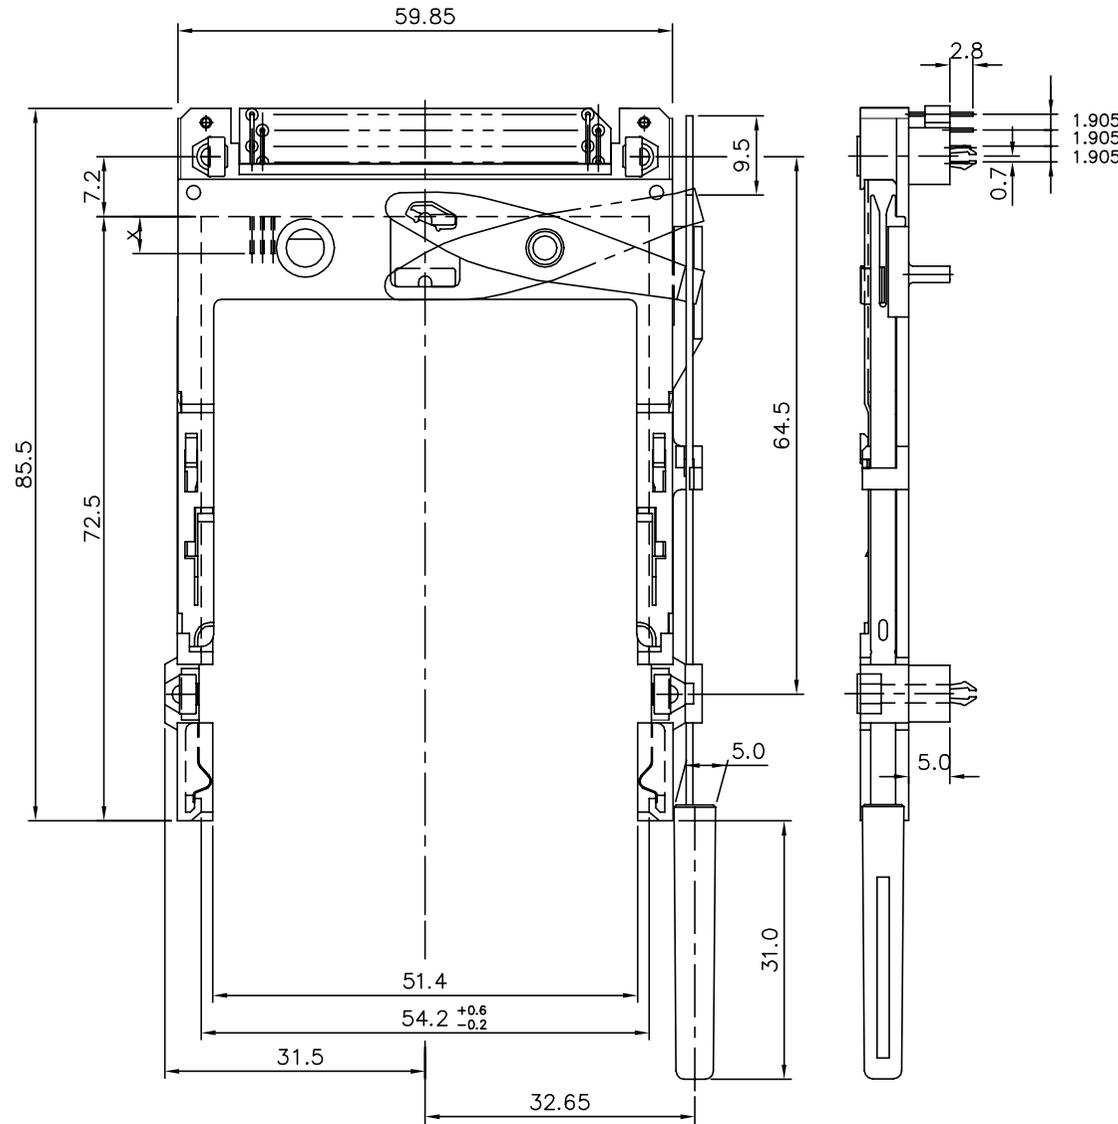

NOTES:

- EJECT FORCE : 3.5 Kg MAX.
- EJECT TRAVEL: 8.0mm
- MATERIAL
  - HEADER ASS'Y :
    - PLASTIC : HOUSING ...HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
    - : LOCATOR ...HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
    - PIN : COPPER ALLOY
  - EJECT MECHANISM ASS'Y :
    - PLASTIC : GUIDE: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
    - : PUSH BUTTON: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
    - PLATE : STAINLESS
    - EMI CONTACT: PHOSPHOR BRONZE
- FINISH (PIN)
  - UNDER PLATING : 0.5µm MIN. Ni
  - CONTACT AREA : 0.076 µm MIN. GOLD
  - SOLDER TAIL(TIN LEAD OPTION): 2.5µm MIN. Sn-Pb
  - SOLDER TAIL(LEAD FREE OPTION): 2.5µm MIN. PURE TIN
- DIM "X"
 

	4.25±0.1	3.5±0.1	5.0±0.1
OTHERS	36,67	1,17,34,35,51,68	
- IF LEAD FREE P/N. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.
- LEAD FREE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DISCRIBED IN GS-22-008
- IF LEAD FREE P/N. PACKAGING MEETS GS-14-920 SPECIFICATION
- PRODUCT SPEC: 110-263

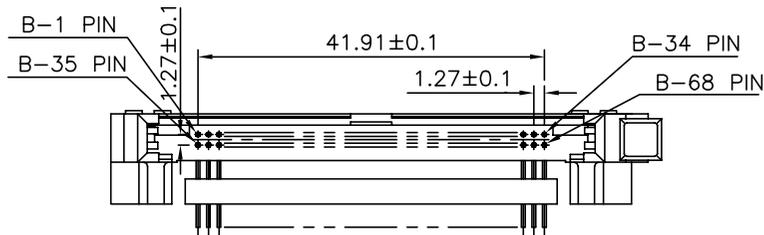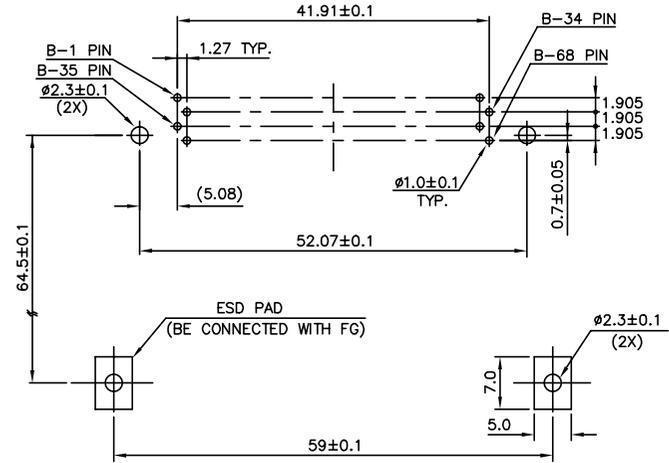


mat'l code		tolerance unless otherwise specified		CUSTOMER COPY		FCJ www.fcjconnect.com	
rev.	ecn no.	dr	date	linear	±0.30	projection	title
A	N10-0032	SH	02/03/10				PCMCIA R/A EJECTOR ASS'Y
B	N10-0062	SH	03/24/10				3.3V, TYPE 1/2/3
C	ELX-N-011456	ZK	04/14/12	angles	± 2°		product family PCMCIA
D	ELX-N-011827	ZK	06/01/12	dr	WENDY CHEN 01/21/99	unit	code
				enrg	LEIF SHEN 01/21/99	MM	size
				chr	JOSEPH HSIA 01/21/99	scale	dwg no.
				appd	JENN TSAO 01/21/99	1.5:1	10112445
sheet	revision	D	D	D	D		
index	sheet	1	2	3	4		
							sheet 1 OF 4

Tous droits strictement réservés. Reproduction ou communication à des tiers sans autorisation écrite du propriétaire.  
 FCJ ELECTRONICS  
 Droits de reproduction BERG ELECTRONICS bv



All rights strictly reserved. Reproduction or issue to third parties in any form without written authority from the proprietor.  
 FCJ ELECTRONICS  
 Copyright BERG ELECTRONICS bv

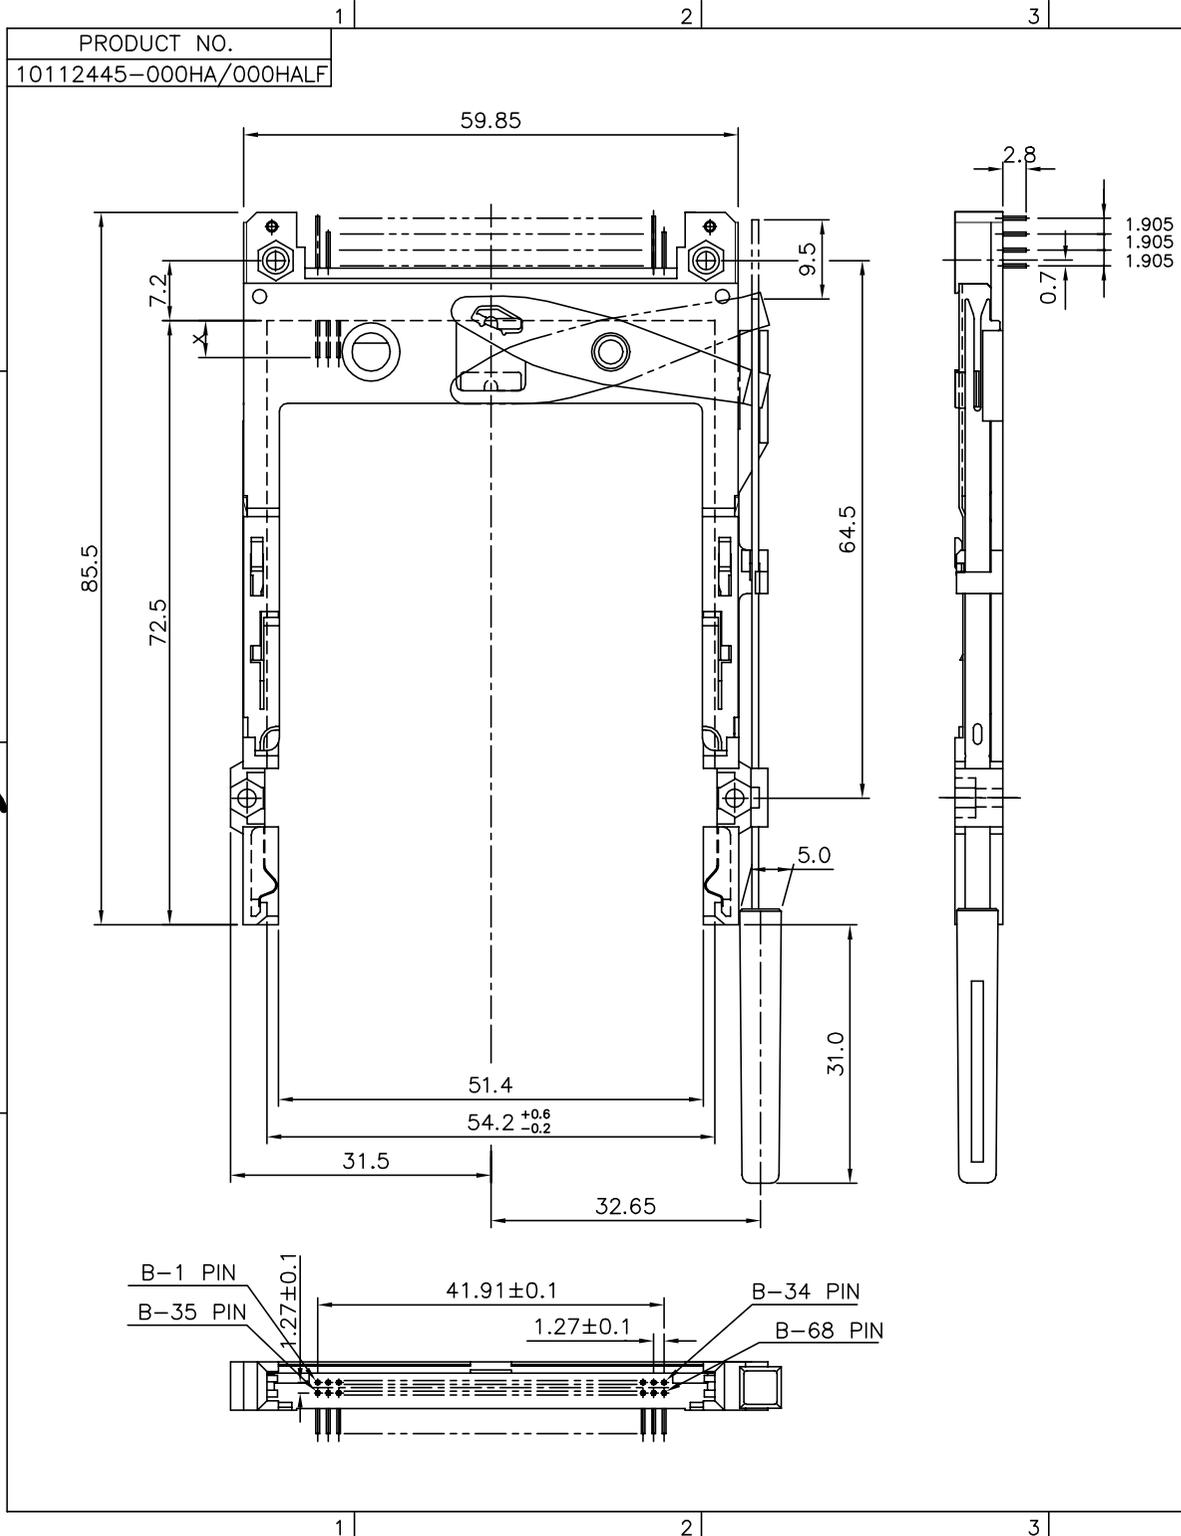


NOTES:

- EJECT FORCE : 3.5 Kg MAX.
- EJECT TRAVEL: 8.0mm
- MATERIAL
  - HEADER ASS'Y :
    - PLASTIC : HOUSING ...HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
    - PIN : COPPER ALLOY
  - EJECT MECHANISM ASS'Y :
    - PLASTIC : GUIDE: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
    - : PUSH BUTTON: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
    - PLATE : STAINLESS
    - EMI CONTACT: PHOSPHOR BRONZE
- FINISH (PIN)
  - UNDER PLATING : 0.5 $\mu$ m MIN. Ni
  - CONTACT AREA : 0.076  $\mu$ m MIN. GOLD
  - SOLDER TAIL (TIN LEAD OPTION): 2.5 $\mu$ m MIN. Sn-Pb
  - SOLDER TAIL (LEAD FREE OPTION): 2.5 $\mu$ m MIN. PURE TIN

5. DIM "X"	4.25 $\pm$ 0.1	3.5 $\pm$ 0.1	5.0 $\pm$ 0.1
	OTHERS	36,67	1,17,34,35,51,68

- IF LEAD FREE P/N. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.
- LEAD FREE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DISCRIBED IN GS-22-008
- IF LEAD FREE P/N. PACKAGING MEETS GS-14-920 SPECIFICATION
- PRODUCT SPEC: 110-263

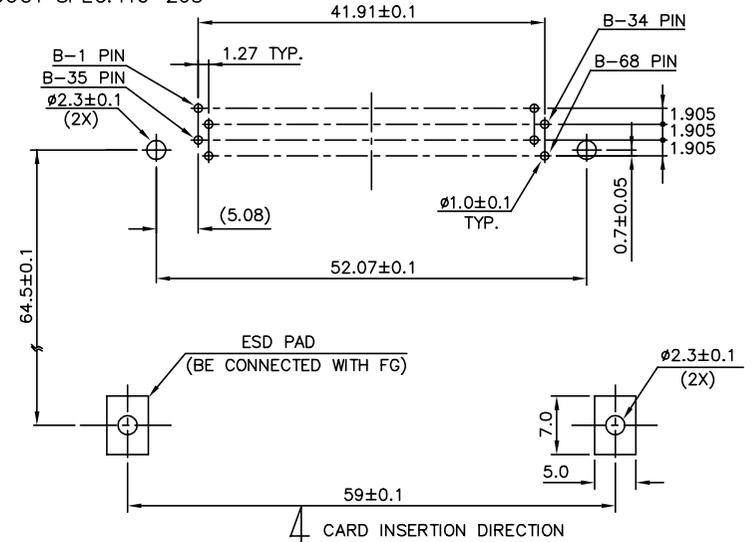


mat'l code		tolerance unless otherwise specified		CUSTOMER COPY		FCJ www.fciconnect.com	
rev.	ecn no.	dr	date	linear	$\pm 0.30$	projection	title
D				angles	$\pm 2^\circ$		PCMCIA R/A EJECTOR ASS'Y 3.3V, TYPE 1/2/3
		dr	WENDY CHEN 07/13/01	unit	MM	product family	PCMCIA
		enrg	MINERVA WANG 07/13/01	scale	1.5:1	size	dwg no.
		chr	MINERVA WANG 07/13/01				10112445
		appd	JENN TSAO 07/13/01				sheet 2 OF 4
sheet	revision						
index	sheet						



Tous droits strictement réservés. Reproduction ou communication à des tiers sans autorisation écrite du propriétaire.  
 FCJ ELECTRONICS  
 Droits de reproduction FCJ ELECTRONICS BV




All rights strictly reserved. Reproduction or issue to third parties in any form without written authority from the proprietor.  
 FCJ ELECTRONICS  
 Copyright FCJ ELECTRONICS BV

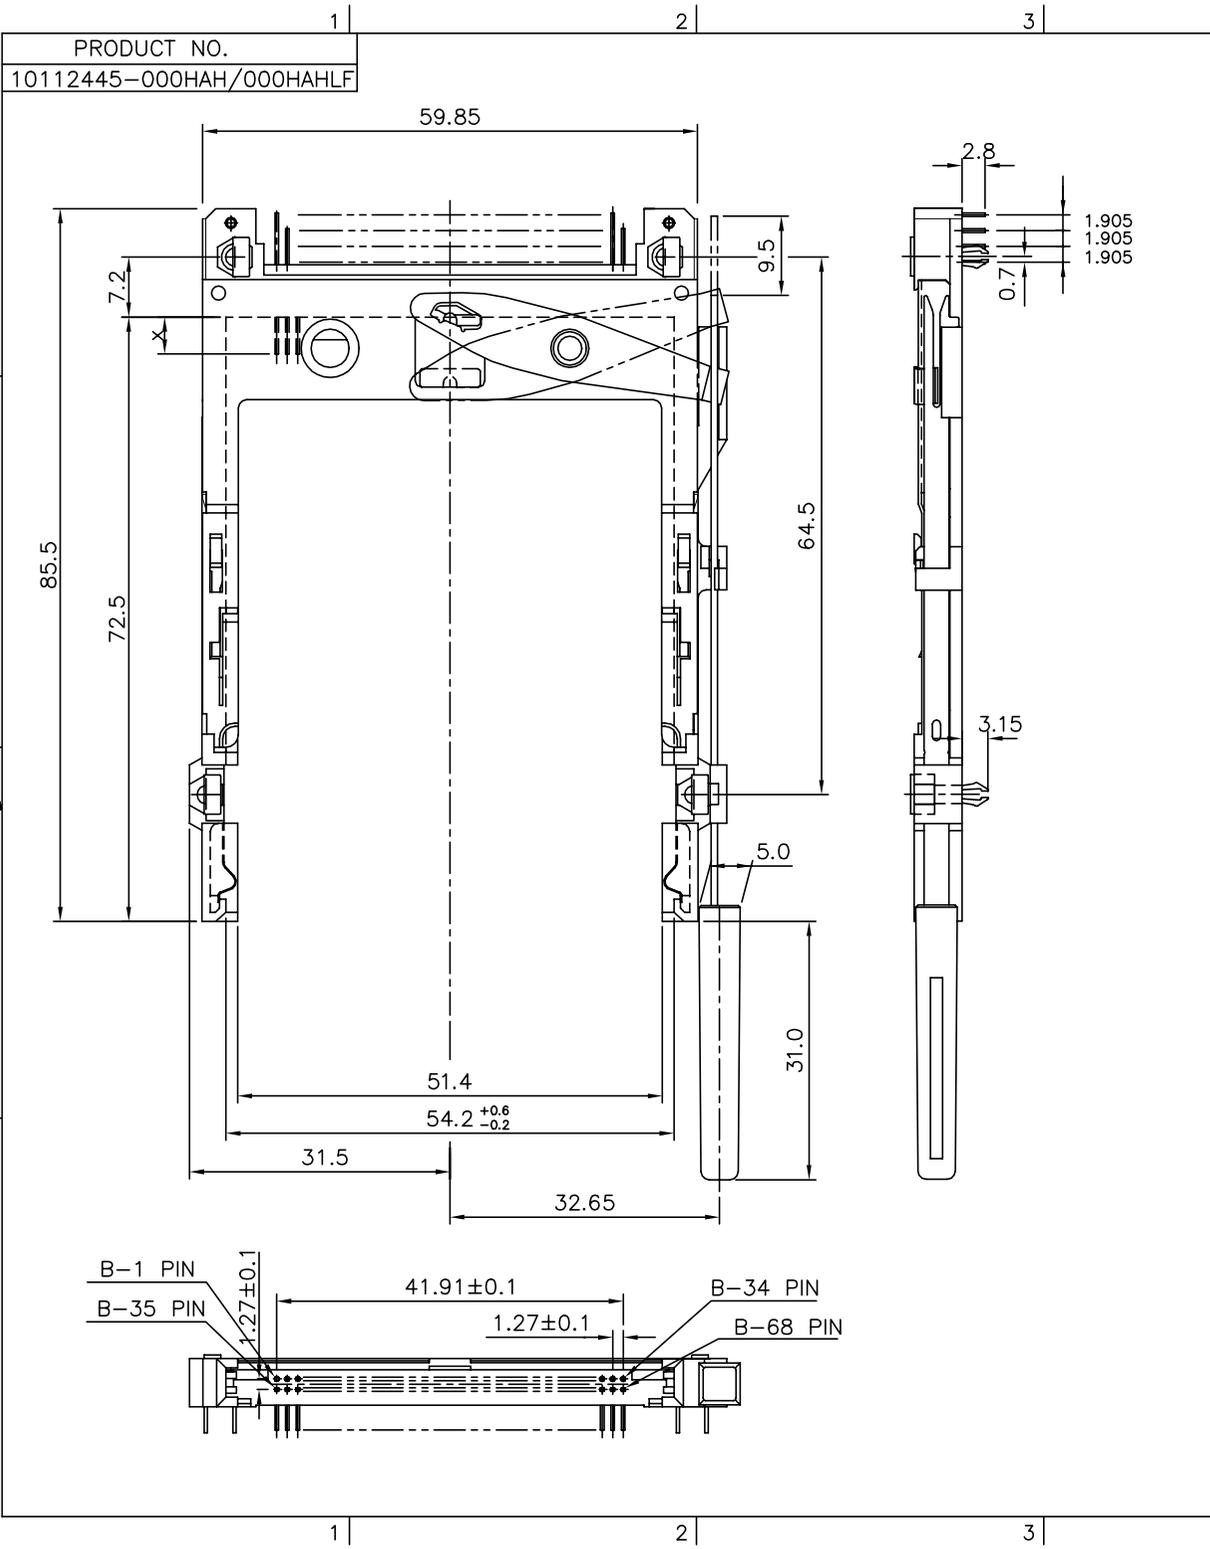

- NOTES:
- EJECT FORCE : 3.5 Kg MAX.
  - EJECT TRAVEL: 8.0mm
  - MATERIAL
    - HEADER ASS'Y :
      - HOUSING: PLASTIC, HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
      - PIN : COPPER ALLOY
    - EJECT MECHANISM ASS'Y :
      - PLASTIC : HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
      - PUSH BUTTON: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
      - PLATE : STAINLESS
      - EMI CONTACT: COPPY ALLOY
  - FINISH (PIN)
    - UNDER PLATING :  $0.5 \mu\text{m}$  MIN. Ni
    - CONTACT AREA :  $0.076 \mu\text{m}$  MIN. GOLD
    - SOLDER TAIL (TIN LEAD OPTION):  $2.5 \mu\text{m}$  MIN. Sn-Pb
    - SOLDER TAIL (LEAD FREE OPTION):  $2.5 \mu\text{m}$  MIN. PURE TIN
  - DIM "X"
 

4.25±0.1	3.5±0.1	5.0±0.1
OTHERS	36,67	1,17,34,35,51,68
  - IF LEAD FREE P/N. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.
  - LEAD FREE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DISCRIBLED IN GS-22-008
  - IF LEAD FREE P/N. PACKAGING MEETS GS-14-920 SPECIFICATION
  - PRODUCT SPEC: 110-263

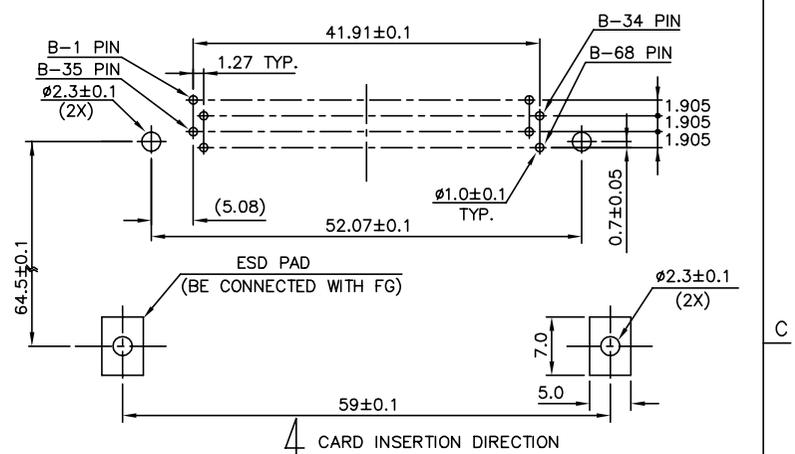

mat'l code		tolerance unless otherwise specified		CUSTOMER COPY		 www.fciconnect.com	
rev.	ecn no.	dr	date	linear	±0.30	projection	title PCMCIA R/A EJECTOR ASS'Y 3.3V, TYPE 1/2/3
D				angles	± 2'		
		dr	WENDY CHEN 07/13/01	unit	MM	product family	PCMCIA
		enrg	MINERVA WANG 07/13/01	scale	1.5:1	size	dwg no.
		chr	MINERVA WANG 07/13/01				10112445
		appd	JENN TSAO 07/13/01				code
sheet	revision						sheet
index	sheet						4 OF 4