



KEY POS	PART NO.
N	RTHP0201PN-50C
W	RTHP0201PW-50C
Х	RTHP0201PX-50C
Y	RTHP0201PY-50C
Z	RTHP0201PZ-50C

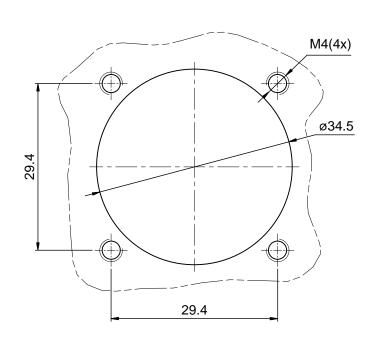

Mounting Hole

## NOTES:

- 1. MATERIAL:
  - 1.1 HOUSING BODY: ZINC DIE-CAST, NICKEL PLATED
  - 1.2 INSULATION INSERT: PA66,UL94 V0
  - 1.3 CONTACT: COPPER ALLOY, SILVER PLATED
  - 1.4 SEAL: SILICONE RUBBER
- 2. SPECIFICATIONS:
  - 2.1 CURRENT RATING: 180 AMPS MAX.
  - 2.2 VOLTAGE RATING: 630 V AC/DC
  - 2.3 OPERATING TEMPERATURE: -40°C TO +125°C
  - 2.4 DIELECTRIC WITHSTANDING VOLTAGE:
    - LESS THAN 2 MILLIAMPS CURRENT IEAKAGE @ 5000 VOLTS AC
  - 2.5 DEGREE OF PROTECTION: IP67 (MATED CONDITION)
  - 2.6 DEGREE OF POLLUTION: 3 PER UL840
- 2.7 OVERVOLTAGE CATEGORY: III PER UL840
- 2.8 MATING CYCLE DURABILITY: >100 CYCLES
- 2.9 RoHS COMPLIANT
- 3. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.
- 4. "\*" DENOTE KEY POSTION OF "N", "W", "X", "Y" OR "Z".
- 5. CONTACT P/N: HP50DCS

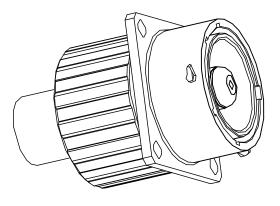

	SEE PART NUMBER  CHART										
QUANTITY	ITITY PART NUMBER		DESCRIPTION					ITEM			
MATERIALS LIST											
	WISE SPECIFIED	SIGNATURE	S DAT	E	Amphonol						
All dimensions are in metric(mm).     Tolerances are as follows:     PL DEC ±0.30   Fractions +1/64		Drack	08/14/	14	Amphenol						
2 PL DEC ±0.15 3 PL DEC ±0.08	Angles ±1°	CHECKED:			Sine Systems - www.amphenol-sine.com						
3) Note reference = X  MATERIAL SPECIFICATIONS:		ENGINEER:			44724 Morley Drive						
		APPROVAL:			Clinton Township, MI 48036						
WATERIAL SPECIFICA	HONS.	CUSTOMER:		ECC	ECO-MATE,RECEPTACLE,10mm SINGLE PIN CONTACT, CRIMP TYPE,FLANGE WALL MOUNTING						
		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL									
PROCESS SPECIFICA	TIONS:			ATA SIZE	C-	RTHP0201F		B1			
NEXT ASS'Y:		MANUFACTURING VARIATIONS.		SCALE:	3:2	SHE	EET 1 OF	1			

TITLE: ECOMMER, RECEPTACLE, 10mm SINGLE PIN CONTACT, CRIMP TYPE, FLANGE WALL MOUNTING DWG NO:

RTHP0201P\*-50C REV:

81 SH: 1