



# Photomicrosensor (Reflective) EE-SY193

## ■ Dimensions.

**Note:** All units are in millimeters unless otherwise indicated.

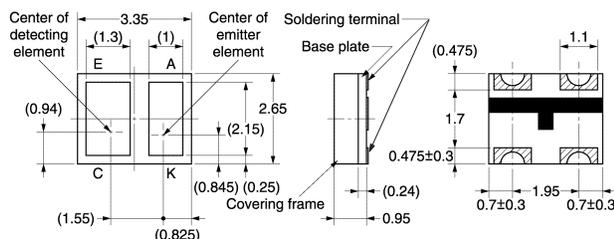


### Internal Circuit



Terminal No.	Name
A	Anode
K	Cathode
C	Collector
E	Emitter

### Recommended soldering patterns



Unless otherwise specified, the tolerances are  $\pm 0.2$  mm.

## ■ Features

- Ultra-compact model.
- PCB surface mounting type.
- RoHS Compliant.

## ■ Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Rated value
Emitter	Forward current	$I_F$ 25 mA (see note 1)
	Pulse forward current	$I_{FP}$ 100 mA (see note 2)
	Reverse voltage	$V_R$ 6 V
Detector	Collector–Emitter voltage	$V_{CEO}$ 18 V
	Emitter–Collector voltage	$V_{ECO}$ 4 V
	Collector current	$I_C$ 20 mA
	Collector dissipation	$P_C$ 75 mW (see note 1)
Ambient temperature	Operating	$T_{opr}$ $-30^\circ\text{C}$ to $80^\circ\text{C}$
	Storage	$T_{stg}$ $-40^\circ\text{C}$ to $85^\circ\text{C}$
	Reflow soldering	$T_{sol}$ $220^\circ\text{C}$ (see note 3)
	Manual soldering	$T_{sol}$ $300^\circ\text{C}$ (see note 3)

**Note:** 1. Refer to the temperature rating chart if the ambient temperature exceeds  $25^\circ\text{C}$ .

2. Duty: 1/100; Pulse width: 0.1 ms

3. Complete soldering within 10 seconds for reflow soldering and within 3 seconds for manual soldering.

## ■ Ordering Information

Description	Model
Photomicrosensor (reflective)	EE-SY193


## ■ Electrical and Optical Characteristics (Ta = 25°C)

Item	Symbol	Value	Condition
Emitter	Forward voltage	$V_F$ 1.1 V typ., 1.3 V max.	$I_F = 4$ mA
	Reverse current	$I_R$ 10 $\mu\text{A}$ max.	$V_R = 6$ V
	Peak emission wavelength	$\lambda_P$ 940 nm typ.	$I_F = 20$ mA
Detector	Light current	$I_L$ 100 $\mu\text{A}$ min., 150 $\mu\text{A}$ typ., 360 $\mu\text{A}$ max.	Aluminum-deposited surface, $I_F = 4$ mA, $V_{CE} = 2$ V, $d = 1$ mm (see note)
	Dark current	$I_D$ 100 nA max.	$V_{CE} = 10$ V, 0 lx
	Leakage current	$I_{LEAK}$ 1 $\mu\text{A}$ max.	$I_F = 4$ mA, $V_{CE} = 2$ V
	Collector–Emitter saturated voltage	$V_{CE(sat)}$ ---	---
	Peak spectral sensitivity wavelength	$\lambda_P$ 900 nm typ.	---
Rising time	$t_r$ 25 $\mu\text{s}$ typ.	$V_{CC} = 2$ V, $R_L = 1$ k $\Omega$ ,	
Falling time	$t_f$ 30 $\mu\text{s}$ typ.	$V_{CC} = 2$ V, $R_L = 1$ k $\Omega$ ,	


**Note:** The letter “d” indicates the distance between the top surface of the sensor and the sensing object.

■ Engineering Data


Forward Current vs. Collector Dissipation Temperature Rating

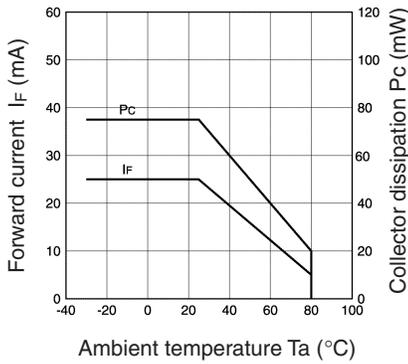


Forward Current vs. Forward Voltage Characteristics (Typical)

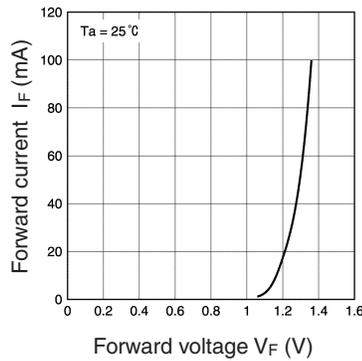


Light Current vs. Forward Current Characteristics (Typical)

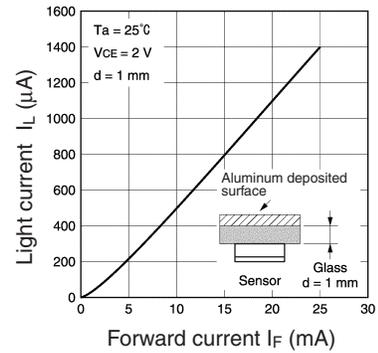


Light Current vs. Collector–Emitter Voltage Characteristics (Typical)

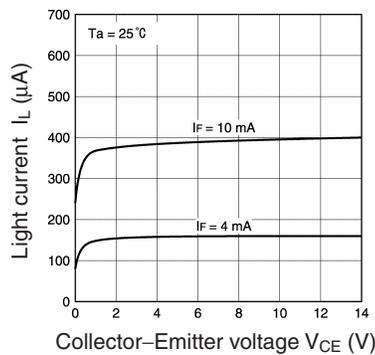


Relative Light Current vs. Ambient Temperature Characteristics (Typical)

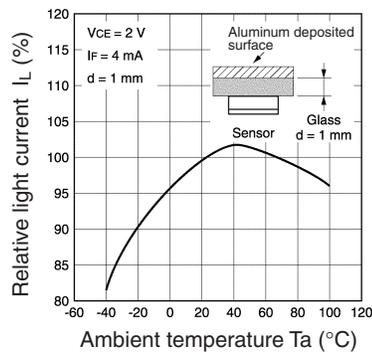


Dark Current vs. Ambient Temperature Characteristics (Typical)

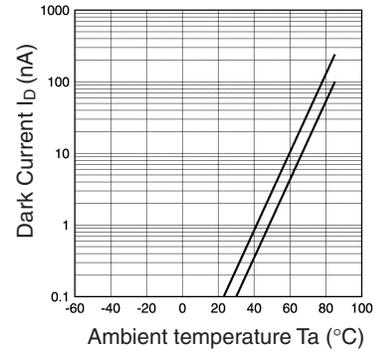


Response Time vs. Load Resistance Characteristics (Typical)

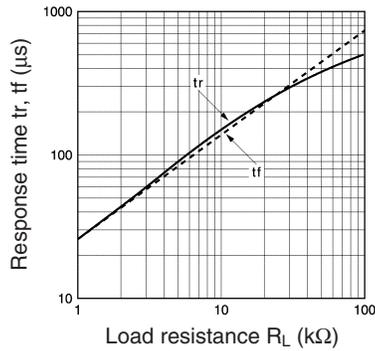


Sensing Distance Characteristics (Typical)

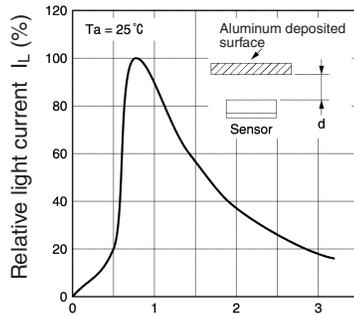

Sensing Position Characteristics (Typical)

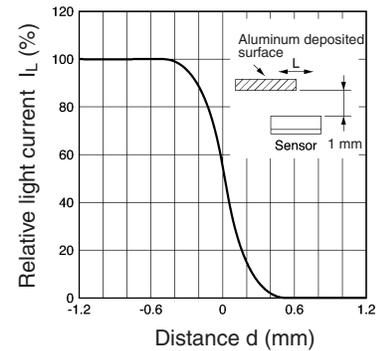


Response Time Measurement Circuit




Unit: mm (inch)

■ Tape and Reel


Reel

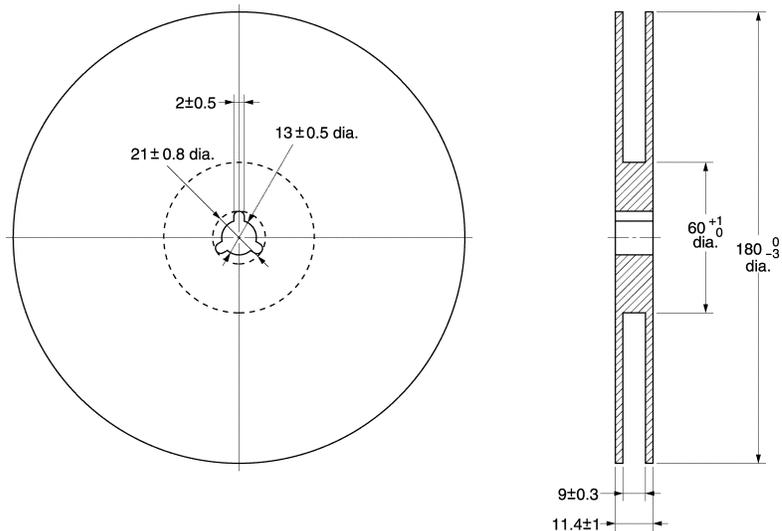

Tape

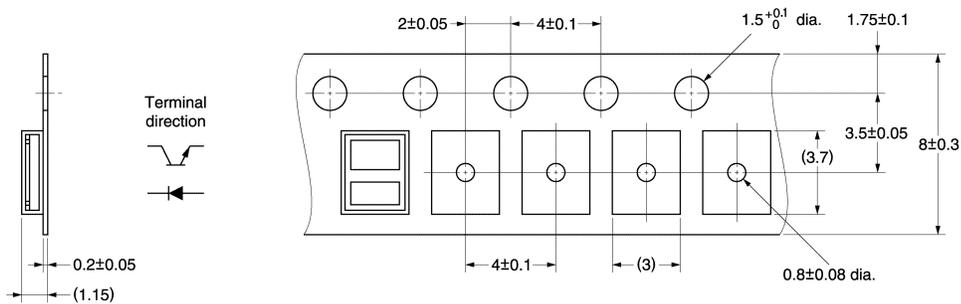

Tape configuration

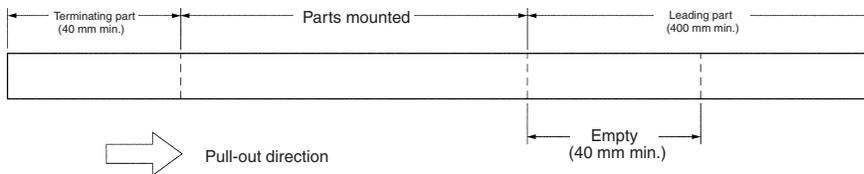

Tape quantity


3,000 pcs./reel

# Precautions

## ■ Soldering Information

### Reflow soldering

- The following soldering paste is recommended:  
Melting temperature: 178 to 192°C
- The recommended thickness of the metal mask for screen printing is between 0.2 and 0.25 mm.
- Set the reflow oven so that the temperature profile shown in the following chart is obtained for the upper surface of the product being soldered.

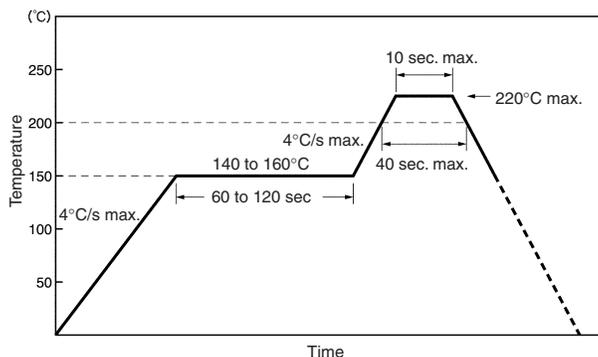

### Manual soldering

- Use "Sn 60" (60% tin and 40% lead) or solder with silver content.
- Use a soldering iron of less than 25 W, and keep the temperature of the iron tip at 300°C or below.
- Solder each point for a maximum of three seconds.
- After soldering, allow the product to return to room temperature before handling it.

### Storage

To protect the product from the effects of humidity until the package is opened, dry-box storage is recommended. If this is not possible, store the product under the following conditions:

Temperature: 10 to 30°C

Humidity: 60% max.

The product is packed in a humidity-proof envelope. Reflow soldering must be done within 48 hours after opening the envelope, during which time the product must be stored under 30°C at 80% maximum humidity.

If it is necessary to store the product after opening the envelope, use dry-box storage or reseal the envelope.

### Baking

If a product has remained packed in a humidity-proof envelope for six months or more, or if more than 48 hours have lapsed since the envelope was opened, bake the product under the following conditions before use:

Reel: 60°C for 24 hours or more

Bulk: 80°C for 24 hours or more

A large grid of 20 columns and 30 rows of small squares, intended for taking notes. The grid is composed of thin lines forming a uniform pattern across the page.

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at [http://www.components.omron.com/components/web/webfiles.nsf/sales\\_terms.html](http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html)

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**  
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

---

**OMRON**<sup>®</sup>

**OMRON ELECTRONIC  
COMPONENTS LLC**

55 E. Commerce Drive, Suite B  
Schaumburg, IL 60173

**847-882-2288**

**OMRON ON-LINE**

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>